

AUTOMATIC CONTROLS

CATALOG-T



SAGInoMIYA



Headquarters



Sayama Plant



Tokorozawa Plant


SAGInoMIYA

Shinjyuku Garden Tower 22F
8-2, Okubo 3-chome, Shinjyuku-ku
Tokyo, 169-0072 Japan



Yonezawa Plant

OVERSEAS NETWORK

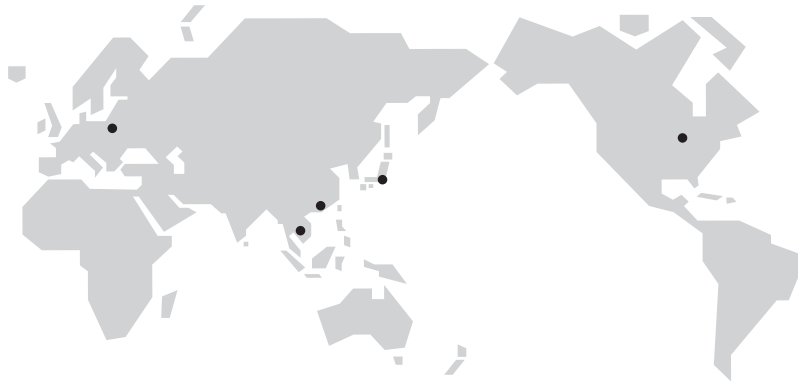

SAGINOMIYA EUROPE Sp. z o.o. (Poland)
Aleje Jerozolimskie 212 02-486
Warsaw, Poland
Sales



FOSHAN HUALU AUTOMATIC CONTROLS LIMITED (China)
No.59&61, Wenhua Nan Road, Chancheng District
Foshan, Guangdong, China
Sales & Manufacturing



SAGINOMIYA AMERICA, INC. (USA)
655 Metro Place South suite 220, Dublin
Ohio 43017, U.S.A.
Sales



Danfoss Saginomiya Sp. z o.o. (Poland)
ul. Chrzanowska 5, 05-825 Grodzisk
Mazowiecki, Poland
Manufacturing



Saginomiya (Thailand) Co., Ltd. (Thailand)
159 Serm-mit Tower 19th Fl., Room No.1903/1
Sukhumvit 21 Rd., Klongtoey-Nua
Wattana, Bangkok 10110, Thailand
Sales & Manufacturing

AUTOMATIC CONTROLS

Catalog-edition-T

- REFERENCE INFORMATION
- APPROVAL STANDARD LIST
- PRESSURE CONTROLS
- TEMPERATURE & HUMIDITY CONTROLS
- PRESSURE & TEMPERATURE CONTROLS INFORMATION
 - EXPANSION VALVES
 - SOLENOID VALVES & CONTROL VALVES
 - OTHER VALVES
- OTHER CONTROL EQUIPMENT

CONTENTS

REFERENCE INFORMATION

CONVERSION TABLES	1-3
SATURATED VAPOUR PRESSURE CURVE	4
APPLICATION EXAMPLES	5-6

APPROVAL STANDARD LIST

APPROVAL STANDARD LIST 7

PRESSURE CONTROLS

SMALL PRESSURE CONTROLS	9-10
Type ACB & LCB	
SMALL PRESSURE CONTROLS	11-12
Type LTB, ETB, HTB & FTB	
SINGLE FUNCTION PRESSURE CONTROLS	13-14
Type SNS & HNS	
DUAL PRESSURE CONTROLS	15-16
Type DNS	
SINGLE FUNCTION PRESSURE CONTROLS	17
Type SYS	
DUAL PRESSURE CONTROLS	18
Type DYS	
PRESSURE CONTROLS WITH NARROW DIFFERENTIAL . .	19-20
Type FNS & ANS	
OIL PROTECTION CONTROLS	21-22
Type ONS	
DIFFERENTIAL PRESSURE CONTROLS	23
Type WNS & YNS	
PRESSURE SENSORS	25-27
Type NSK & XSK	

TEMPERATURE & HUMIDITY CONTROLS

TEMPERATURE CONTROLS	29–30
Type LWS, FWS, RWS & EWS	
TEMPERATURE CONTROLS	31–32
Type TNS, CNS & INS	
TEMPERATURE CONTROLS	33
Type ALS & BLS	

PROPORTIONAL TEMPERATURE CONTROLS	34
Type PWS	
ROOM THERMOSTATS	35–36
Type ARS	
ROOM THERMOSTATS	37
Type WRS	
ROOM HUMIDISTATS	38
Type AHS	
DIGITAL THERMOSTATS & DIGITAL HUMIDISTATS . .	39–42
Type ALE & BLE	

PRESSURE & TEMPERATURE CONTROLS INFORMATION

CONNECTION & ACCESSORIES 45-47
DRIP PROOF & WATER PROOF CONTROLS 48-53
Series NS-W & NS-P

EXPANSION VALVES

GENERAL INFORMATION	55–56
EXPANSION VALVES	57
Type ARX	
EXPANSION VALVES	58–60
Type QCX & RCX	
EXPANSION VALVES	61–63
Type SCX	
PANSION VALVES	65–66
Type ATX (R410A)	
EXPANSION VALVES	67–68
Type ATX	
EXPANSION VALVES	69–70
Type AEX	
ELECTRONIC EXPANSION VALVES	71–73
Type UKV, VKV & AKV	
ELECTRONIC EXPANSION VALVES	74
Type UKV-F	

TYPE NUMBER INDEX

A	ACB	9–10	BKM	122	E	EGK	93–84	HPV	125–127		
	ACV	99	BLE	39–42		EPR	105–106	HSK	125–127		
	ADV	111	BLS	33		ETB	11–12	HTB	11–12		
	AEX	69–70	BPV	86		EWS	29–30	HWR	103–104		
	AHS	38									
	AKM	122	C	CCB	125–127	F	FNS	19–20	I	INS	31–32
	AKV	71–73		CNS	31–32		FNS–P	48–53		INS–W	48–53
	ALE	39–42		CNS–P	48–53		FNS–W	48–53		IEV	87
	ALS	33		CNS–W	48–53		FQS	116			
	ANS	19–20		CWR	101–102		FTB	11–12	J	JKV	125–127
	ANS–P	48–53					FWS	29–30			
	ANS–W	48–53	D	DNS	15–16				L	LCB	9–10
ARS	35–36	DNS–P		48–53	G	GWR	101–102		LNE	75	
ARX	57	DNS–W		48–53					LTB	11–12	
ATX	67–68	DPR		107–108	H	HLB	128		LWS	29–30	
ATX (R410A)	65–66		DYS	18		HNS	13–14				
AWR	101–102					HNS–W	48–53	M	MJV	91–92	
						HPR	109–110		MWR	101–102	
B	BCV	99									

PULSE CONVERTERS 75
Type **LNE**

SOLENOID VALVES & CONTROL VALVES

SOLENOID VALVES FOR REFRIGERANT 77
Type **TEV & VPV**

SOLENOID VALVES FOR REFRIGERANT 78–79
Type **SEV**

SOLENOID VALVES FOR REFRIGERANT 80–81
Type **RPV**

SOLENOID VALVES FOR REFRIGERANT 82–84
Type **REV & UEV**

SOLENOID VALVES FOR WATER 85
Type **WEV**

BI-FLOW SOLENOID VALVES 86
Type **BPV**

3-WAY SOLENOID VALVES 87
Type **IEV**

4-WAY REVERSING VALVES 88–90
Type **STF**

MOTORIZED BALL VALVES 91–92
Type **MJV**

DAMPER & VALVE MOTOR ACTUATORS 93–94
Type **EGK & WGK**

2-WAY & 3-WAY CONTROL VALVES 95–97
Type **NVK**

OTHER VALVES

CHECK VALVES 99
Type **ACV & BCV**

PRESSURE ACTUATED WATER REGULATING VALVES 100
Type **VWR**

PRESSURE ACTUATED WATER REGULATING VALVES . . . 101–102
Type **CWR, AWR, GWR, MWR & SWR**

TEMPERATURE ACTUATED WATER REGULATING VALVES . . . 103–104
Type **OWR, HWR & XWR**

PRESSURE REGULATING VALVES 105–106
Type **EPR**

PRESSURE REGULATING VALVES 107–108
Type **SPR & DPR**

PRESSURE REGULATING VALVES 109–110
Type **HPR**

DIAPHRAGM TYPE STOP VALVES 111
Type **ADV**

BELLOWS TYPE STOP VALVES 112–113
Type **NBV**

OTHER CONTROL EQUIPMENT

FLOW SWITCHES 116
Type **FQS**

CONDENSER FAN SPEED CONTROLLERS 119–120
Type **RGE**

CONDENSER FAN SPEED CONTROLLERS 121
Type **XGE**

TEMPERATURE RECORDERS 122
Type **AKM & BKM**

CO₂ REFRIGERANT APPLICATIONS 125–127
Type **CCB, HSK, HPV, UKV-J & JKV**

BELLOWS 128
Type **HBL & WSL**

OTHER CONTROLS & VALVES 129
Type **RKV & BI-METAL (No. 03, 05 & 24)**

N NBV 112–113
NSK 25–27
NVK 95–97

O ONS 21–22
ONS-W 48–53
OWR 103–104

P PKV 129
PWS 34

Q QCX 58–60

R RCX 58–60
REV 82–84
RGE 119–120
RKV 129
RPV 80–81
RWS 29–30

S SCX 61–63
SEV 78–79
SNS 13–14
SNS-P 48–53
SNS-W 48–53
SPR 107–108
STF 88–90
SWR 101–102
SYS 17

T TEV 77
TNS 31–32
TNS-P 48–53
TNS-W 48–53

U UEV 82–84
UKV 71–73

UKV-F 74
UKV-J 125–127

V VKV 71–73
VPV 77
VWR 100

W WEV 85
WGK 93–94
WNS 23
WNS-W 48–53
WRS 37
WSL 128

X XGE 121
XSK 25–27
XWR 103–104

Y YNS 23
YNS-W 48–53

No.03 129
No.05 129
No.24 129

PULSE CONVERTERS 75
Type **LNE**

SOLENOID VALVES & CONTROL VALVES

SOLENOID VALVES FOR REFRIGERANT 77
Type **TEV & VPV**

SOLENOID VALVES FOR REFRIGERANT 78–79
Type **SEV**

SOLENOID VALVES FOR REFRIGERANT 80–81
Type **RPV**

SOLENOID VALVES FOR REFRIGERANT 82–84
Type **REV & UEV**

SOLENOID VALVES FOR WATER 85
Type **WEV**

BI-FLOW SOLENOID VALVES 86
Type **BPV**

3-WAY SOLENOID VALVES 87
Type **IEV**

4-WAY REVERSING VALVES 88–90
Type **STF**

MOTORIZED BALL VALVES 91–92
Type **MJV**

DAMPER & VALVE MOTOR ACTUATORS 93–94
Type **EGK & WGK**

2-WAY & 3-WAY CONTROL VALVES 95–97
Type **NVK**

OTHER VALVES

CHECK VALVES 99
Type **ACV & BCV**

PRESSURE ACTUATED WATER REGULATING VALVES 100
Type **VWR**

PRESSURE ACTUATED WATER REGULATING VALVES . . . 101–102
Type **CWR, AWR, GWR, MWR & SWR**

TEMPERATURE ACTUATED WATER REGULATING VALVES . . . 103–104
Type **OWR, HWR & XWR**

PRESSURE REGULATING VALVES 105–106
Type **EPR**

PRESSURE REGULATING VALVES 107–108
Type **SPR & DPR**

PRESSURE REGULATING VALVES 109–110
Type **HPR**

DIAPHRAGM TYPE STOP VALVES 111
Type **ADV**

BELLOWS TYPE STOP VALVES 112–113
Type **NBV**

OTHER CONTROL EQUIPMENT

FLOW SWITCHES 116
Type **FQS**

CONDENSER FAN SPEED CONTROLLERS 119–120
Type **RGE**

CONDENSER FAN SPEED CONTROLLERS 121
Type **XGE**

TEMPERATURE RECORDERS 122
Type **AKM & BKM**

CO₂ REFRIGERANT APPLICATIONS 125–127
Type **CCB, HSK, HPV, UKV-J & JKV**

BELLOWS 128
Type **HBL & WSL**

OTHER CONTROLS & VALVES 129
Type **RKV & BI-METAL (No. 03, 05 & 24)**

N NBV 112–113
NSK 25–27
NVK 95–97

O ONS 21–22
ONS-W 48–53
OWR 103–104

P PKV 129
PWS 34

Q QCX 58–60

R RCX 58–60
REV 82–84
RGE 119–120
RKV 129
RPV 80–81
RWS 29–30

S SCX 61–63
SEV 78–79
SNS 13–14
SNS-P 48–53
SNS-W 48–53
SPR 107–108
STF 88–90
SWR 101–102
SYS 17

T TEV 77
TNE 43
TNS 31–32
TNS-P 48–53
TNS-W 48–53

U UEV 82–84
UKV 71–73

UKV-F 74
UKV-J 125–127
V VKV 71–73
VPV 77
VWR 100

W WEV 85
WGK 93–94
WNS 23
WNS-W 48–53
WRS 37
WSL 128

X XGE 121
XSK 25–27
XWR 103–104

Y YNS 23
YNS-W 48–53
No.03 129
No.05 129
No.24 129

REFERENCE INFORMATION

1. CONVERSION TABLES

1) Temperature conversion table (°C ↔ °F)

The figures in the center column show the temperature to be converted. The figures on the left show conversion from Fahrenheit to Centigrade and the figures on the right from Centigrade to Fahrenheit.

Example :

°C	↓	°F
5	↓	41.0
−15.0	5	41.0

−15.0°C ↔ 5°F

Temperature conversion formula :

$$^{\circ}\text{C} = 5/9 (^{\circ}\text{F} - 32)$$

$$^{\circ}\text{F} = 9/5 \times ^{\circ}\text{C} + 32$$

°C	↓	°F	°C	↓	°F	°C	↓	°F	°C	↓	°F	°C	↓	°F
−101.1	−150	−238.0	−37.2	−35	−31.0	−23.3	−10	14.0	−9.4	15	59.0	4.4	40	104.0
−95.6	−140	−220.0	−36.7	−34	−29.2	−22.8	−9	15.8	−8.9	16	60.8	5.0	41	105.8
−90.0	−130	−202.0	−36.1	−33	−27.4	−22.2	−8	17.6	−8.3	17	62.6	5.6	42	107.6
−84.4	−120	−184.0	−35.6	−32	−25.6	−21.7	−7	19.4	−7.8	18	64.4	6.1	43	109.4
−78.9	−110	−166.0	−35.0	−31	−23.8	−21.1	−6	21.2	−7.2	19	66.2	6.7	44	111.2
−73.3	−100	−148.0	−34.4	−30	−22.0	−20.6	−5	23.0	−6.7	20	68.0	7.2	45	113.0
−67.8	−90	−130.0	−33.9	−29	−20.2	−20.0	−4	24.8	−6.1	21	69.8	7.8	46	114.8
−62.2	−80	−112.0	−33.3	−28	−18.4	−19.4	−3	26.6	−5.6	22	71.6	8.3	47	116.6
−56.7	−70	−94.0	−32.8	−27	−16.6	−18.9	−2	28.4	−5.0	23	73.4	8.9	48	118.4
−51.1	−60	−76.0	−32.2	−26	−14.8	−18.3	−1	30.2	−4.4	24	75.2	9.4	49	120.2
−45.6	−50	−58.0	−31.7	−25	−13.0	−17.8	0	32.0	−3.9	25	77.0	10.0	50	122.0
−45.0	−49	−56.2	−31.1	−24	−11.2	−17.2	1	33.8	−3.3	26	78.8	15.6	60	140.0
−44.4	−48	−54.4	−30.6	−23	−9.4	−16.7	2	35.6	−2.8	27	80.6	21.1	70	158.0
−43.8	−47	−52.6	−30.0	−22	−7.6	−16.1	3	37.4	−2.2	28	82.4	26.7	80	176.0
−43.3	−46	−50.8	−29.4	−21	−5.8	−15.6	4	39.2	−1.7	29	84.2	32.2	90	194.0
−42.8	−45	−49.0	−28.9	−20	−4.0	−15.0	5	41.0	−1.1	30	86.0	37.8	100	212.0
−42.2	−44	−47.2	−28.3	−19	−2.2	−14.4	6	42.8	−0.6	31	87.8	43.3	110	230.0
−41.7	−43	−45.4	−27.8	−18	−0.4	−13.9	7	44.6	0.0	32	89.6	48.9	120	248.0
−41.1	−42	−43.6	−27.2	−17	1.4	−13.3	8	46.4	0.6	33	91.4	54.4	130	266.0
−40.6	−41	−41.8	−26.7	−16	3.2	−12.8	9	48.2	1.1	34	93.2	60.0	140	284.0
−40.0	−40	−40.0	−26.1	−15	5.0	−12.2	10	50.0	1.7	35	95.0	65.6	150	302.0
−39.4	−39	−38.2	−25.6	−14	6.8	−11.7	11	51.8	2.2	36	96.8	71.1	160	320.0
−38.9	−38	−36.4	−25.0	−13	8.6	−11.1	12	53.6	2.8	37	98.6	76.7	170	338.0
−38.3	−37	−34.6	−24.4	−12	10.4	−10.6	13	55.4	3.3	38	100.4	82.2	180	356.0
−37.8	−36	−32.8	−23.9	−11	12.2	−10.0	14	57.2	3.9	39	102.2	87.8	190	374.0

2) Temperature difference conversion table (°C ↔ °F)

°C	↓	°F	°C	↓	°F
0.056	0.1	0.18	3.33	6	10.8
0.111	0.2	0.36	3.89	7	12.6
0.278	0.5	0.90	4.44	8	14.4
0.56	1	1.8	5.00	9	16.2
1.11	2	3.6	5.56	10	18.0
1.67	3	5.4	6.11	11	19.8
2.22	4	7.2	6.67	12	21.6
2.78	5	9.0	8.33	15	27.0

This table is a comparison table of temperature difference. For example, a 9°F difference (77°F—68°F) corresponds to a 5°C difference (25°C—20°C).

3) Pressure conversion table (kgf/cm² ↔ MPa)

The figures in the center column show the pressure to be converted. The figures on the left show conversion from MPa to kgf/cm² and the figures on the right from kgf/cm² to MPa.

Example : 1 MPa=10.1972kgf/cm², 1kgf/cm²=0.09807 MPa

kgf/cm²	↓	MPa	kgf/cm²	↓	MPa	kgf/cm²	↓	MPa	kgf/cm²	↓	MPa
0	0	0	214.141	21	2.05940	520.057	51	5.00139	825.973	81	7.94339
1.01972	0.1	0.009806	224.338	22	2.15746	530.254	52	5.09946	836.170	82	8.04145
2.03944	0.2	0.019613	234.535	23	2.25553	540.451	53	5.19752	846.367	83	8.13952
3.05916	0.3	0.029420	244.732	24	2.35360	550.648	54	5.29559	856.564	84	8.23759
4.07888	0.4	0.039226	254.930	25	2.45166	560.846	55	5.39366	866.762	85	8.33565
5.09860	0.5	0.049033	265.127	26	2.54973	571.043	56	5.49172	876.959	86	8.43372
6.11832	0.6	0.058839	275.324	27	2.64780	581.240	57	5.58279	887.156	87	8.53179
7.13804	0.7	0.068646	285.521	28	2.74586	591.437	58	5.68786	897.353	88	8.62985
8.15776	0.8	0.078453	295.718	29	2.84393	601.634	59	5.78592	907.550	89	8.72792
9.17748	0.9	0.088259	305.916	30	2.94199	611.832	60	5.88399	917.748	90	8.82598
10.1972	1	0.09807	316.113	31	3.04006	622.029	61	5.98206	927.945	91	8.92405
20.3944	2	0.19613	326.310	32	3.18313	632.226	62	6.08012	938.142	92	9.02212
30.5916	3	0.29420	336.507	33	3.23619	642.423	63	6.17819	948.339	93	9.12018
40.7888	4	0.39227	346.704	34	3.33426	652.620	64	6.27626	958.536	94	9.21825
50.9860	5	0.49033	356.902	35	3.43233	662.818	65	6.37432	968.734	95	9.31632
61.1832	6	0.58840	367.099	36	3.53039	673.015	66	6.47239	978.931	96	9.41438
71.3804	7	0.68647	377.296	37	3.62846	683.212	67	6.57046	989.128	97	9.51245
81.5776	8	0.78453	387.493	38	3.72653	693.409	68	6.66852	999.325	98	9.61052
91.7748	9	0.88260	397.690	39	3.82459	703.606	69	6.76659	1000.52	99	9.70858
101.972	10	0.98066	407.888	40	3.92266	713.804	70	6.86465	1019.72	100	9.80665
112.169	11	1.07873	418.085	41	4.02073	724.001	71	6.96272	1529.58	150	14.70997
122.366	12	1.17680	428.282	42	4.11879	734.198	72	7.06079	2039.44	200	19.6133
132.563	13	1.27486	438.479	43	4.21686	744.395	73	7.15885	2549.30	250	24.51662
142.760	14	1.37293	448.676	44	4.31493	754.592	74	7.25692	3059.16	300	29.41995
152.958	15	1.47100	458.874	45	4.41299	764.790	75	7.35499	3569.02	350	34.32327
163.155	16	1.56906	469.071	46	4.51106	774.987	76	7.45305	4078.88	400	39.2266
173.352	17	1.66713	479.268	47	4.60913	785.184	77	7.55112	4588.74	450	44.12992
183.549	18	1.76520	489.465	48	4.70719	795.381	78	7.64919	5098.60	500	49.03325
193.746	19	1.96133	499.662	49	4.80526	805.578	79	7.74725			
203.944	20	1.96133	509.860	50	4.90332	815.776	80	7.84532			

4) Pressure conversion table (kgf/cm² ↔ psi)

kgf/cm ²	↓	psi	kgf/cm ²	↓	psi	kgf/cm ²	↓	psi	kgf/cm ²	↓	psi
0	0	0	0.773	11	156.5	2.180	31	440.9	4.218	60	853.4
0.0070	0.1	1.422	0.844	12	170.8	2.250	32	455.2	4.922	70	995.6
0.0141	0.2	2.845	0.914	13	184.9	2.320	33	469.4	5.625	80	1137.9
0.0211	0.3	4.267	0.984	14	199.1	2.390	34	483.6	6.328	90	1280.1
0.0281	0.4	5.689	1.055	15	213.4	2.461	35	497.8	7.031	100	1422.3
0.0352	0.5	7.112	1.125	16	227.6	2.531	36	512.0	7.734	110	1564.5
0.0422	0.6	8.534	1.195	17	241.8	2.601	37	526.3	8.437	120	1706.8
0.0492	0.7	9.956	1.266	18	256.0	2.672	38	540.5	9.140	130	1849.0
0.0562	0.8	11.379	1.336	19	270.2	2.742	39	554.7	9.843	140	1991.2
0.0633	0.9	12.801	1.406	20	284.5	2.812	40	568.9	10.55	150	2133.5
0.0703	1	14.22	1.477	21	298.7	2.883	41	583.2	14.06	200	2844.6
0.1406	2	28.45	1.547	22	312.9	2.953	42	597.4	21.09	300	4266.9
0.2109	3	42.67	1.617	23	327.1	3.023	43	611.6	28.12	400	5689.2
0.2812	4	56.89	1.687	24	341.4	3.094	44	625.8	35.15	500	7111.5
0.3515	5	71.12	1.758	25	355.6	3.164	45	640.1	42.18	600	8533.8
0.4218	6	85.34	1.828	26	369.8	3.234	46	654.3	49.22	700	9956.1
0.4922	7	99.56	1.898	27	384.0	3.304	47	668.5	56.25	800	11378.4
0.5625	8	113.79	1.969	28	398.3	3.375	48	682.7	63.30	900	12800.7
0.6328	9	128.01	2.039	29	412.5	3.445	49	696.9	70.31	1000	14223.0
0.7031	10	142.22	2.109	30	426.7	3.515	50	711.2			

5) Capacity conversion table (kW ↔ kcal/h)

1kW ↔ 860kcal/h

kW	↓	1000 kcal/h	kW	↓	1000 kcal/h	kW	↓	1000 kcal/h	kW	↓	1000 kcal/h
0.116	0.1	0.086	1.162	1	0.86	11.62	10	8.6	116.2	100	86
0.232	0.2	0.172	2.325	2	1.72	23.25	20	17.2	232.5	200	172
0.348	0.3	0.258	3.488	3	2.58	34.88	30	25.8	348.8	300	258
0.465	0.4	0.344	4.651	4	3.44	46.51	40	34.4	465.1	400	344
0.581	0.5	0.430	5.813	5	4.33	58.13	50	43.3	581.3	500	433
0.697	0.6	0.516	6.976	6	5.16	69.76	60	51.6	697.6	600	516
0.813	0.7	0.602	8.139	7	6.02	81.39	70	60.2	813.9	700	602
0.930	0.8	0.688	9.302	8	6.88	93.02	80	68.8	930.2	800	688
1.046	0.9	0.774	10.46	9	7.74	104.6	90	77.4	104.6	900	774

6) Length conversion table

(In ↔ mm)

In	mm	In	mm
1/8	3.18	1/64	0.40
1/4	6.35	3/64	1.19
3/8	9.53	5/64	1.98
1/2	12.70	7/64	2.78
5/8	15.88	9/64	3.57
3/4	19.05	11/64	4.39
7/8	22.23	13/64	5.16
1	25.40	15/64	5.95
1/16	1.59	17/64	6.75
3/16	4.76	19/64	7.54
5/16	7.94	21/64	8.33
7/16	11.11	23/64	9.13
9/16	14.29	25/64	9.92
11/16	17.46	27/64	10.72
13/16	20.64	29/64	11.51
15/16	23.81	31/64	12.30
1/32	0.79	33/64	13.10
3/32	2.38	35/64	13.89
5/32	3.97	37/64	14.68
7/32	5.56	39/64	15.48
9/32	7.14	41/64	16.27
11/32	8.73	43/64	17.07
13/32	10.32	45/64	17.86
15/32	11.91	47/64	18.65
17/32	13.49	49/64	19.45
19/32	15.08	51/64	20.24
21/32	16.67	53/64	21.04
23/32	18.26	55/64	21.83
25/32	19.84	57/64	22.62
27/32	21.43	59/64	23.42
29/32	23.02	61/64	24.21
31/32	24.61	63/64	25.00

7) Vacuum conversion table


(MPa ↔ MPa (abs) ↔ cmHg v ↔ kgf/cm²(abs))

MPa	MPa (abs)	cmHg v	kgf/cm ² (abs)	MPa	MPa (abs)	cmHg v	kgf/cm ² (abs)
-0.1013	0	76	0	-0.0480	0.0533	36	0.5438
-0.0987	0.0027	74	0.0274	-0.0453	0.0560	34	0.5710
-0.0960	0.0053	72	0.0544	-0.0427	0.0587	32	0.5981
-0.0933	0.0080	70	0.0816	-0.0400	0.0613	30	0.6254
-0.0907	0.0107	68	0.1088	-0.0373	0.0640	28	0.6526
-0.0880	0.0133	66	0.1360	-0.0347	0.0667	26	0.6798
-0.0853	0.0160	64	0.1631	-0.0320	0.0693	24	0.7069
-0.0827	0.0187	62	0.1903	-0.0293	0.0720	22	0.7341
-0.0800	0.0213	60	0.2175	-0.0267	0.0747	20	0.7613
-0.0773	0.0240	58	0.2447	-0.0240	0.0773	18	0.7885
-0.0747	0.0267	56	0.2719	-0.0213	0.0800	16	0.8157
-0.0720	0.0293	54	0.2991	-0.0187	0.0827	14	0.8429
-0.0693	0.0320	52	0.3263	-0.0160	0.0853	12	0.8700
-0.0667	0.0347	50	0.3535	-0.0133	0.0880	10	0.8972
-0.0640	0.0373	48	0.3806	-0.0107	0.0907	8	0.9245
-0.0613	0.0400	46	0.4078	-0.0080	0.0933	6	0.9517
-0.0587	0.0427	44	0.4350	-0.0053	0.0960	4	0.9788
-0.0560	0.0453	42	0.4622	-0.0027	0.0987	2	1.0060
-0.0533	0.0480	40	0.4894	0	0.1013	0	1.0332
-0.0507	0.0507	38	0.5166				

8) Other conversion values


1 kg=2.20462 lb, 1mm=0.03937 inch
 1 U.S. Refrigeration Ton=12,000 Btu/h=3,024 kcal/h
 1 kgf/cm²=98.0667 kPa=0.980667 bar

2. SATURATED VAPOUR PRESSURE (°C ↔ MPa (abs), °C ↔ kgf/cm² (abs))

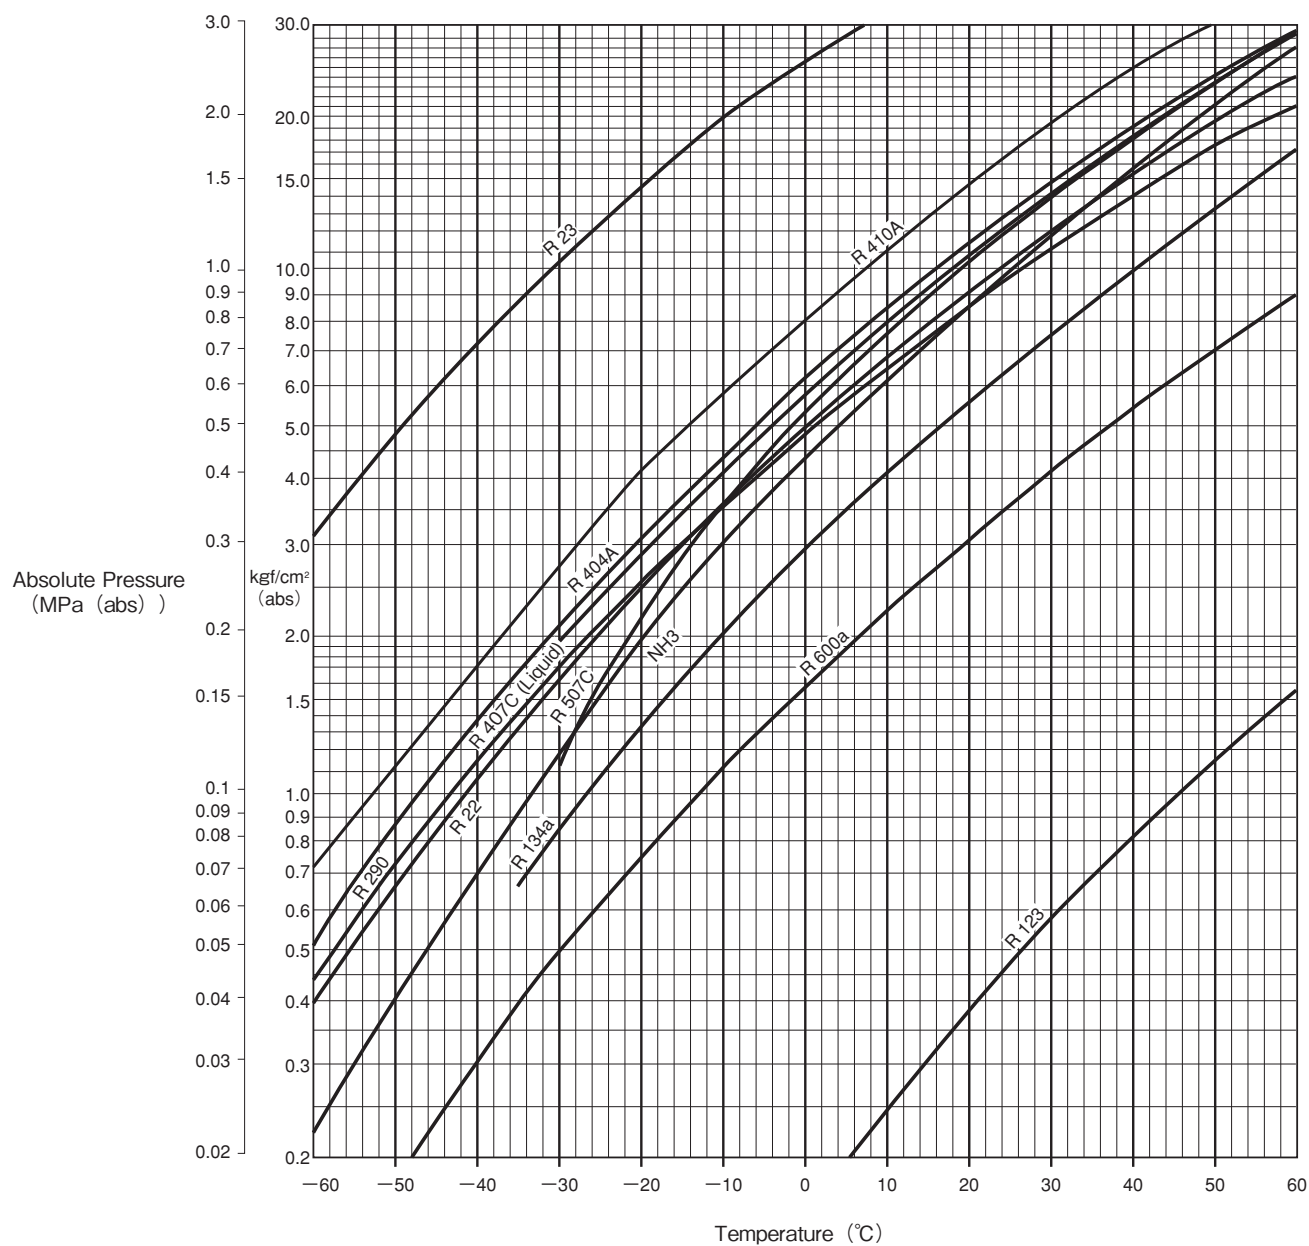

3. APPLICATION EXAMPLES

1). Refrigeration System with Hot Gas Defrosting

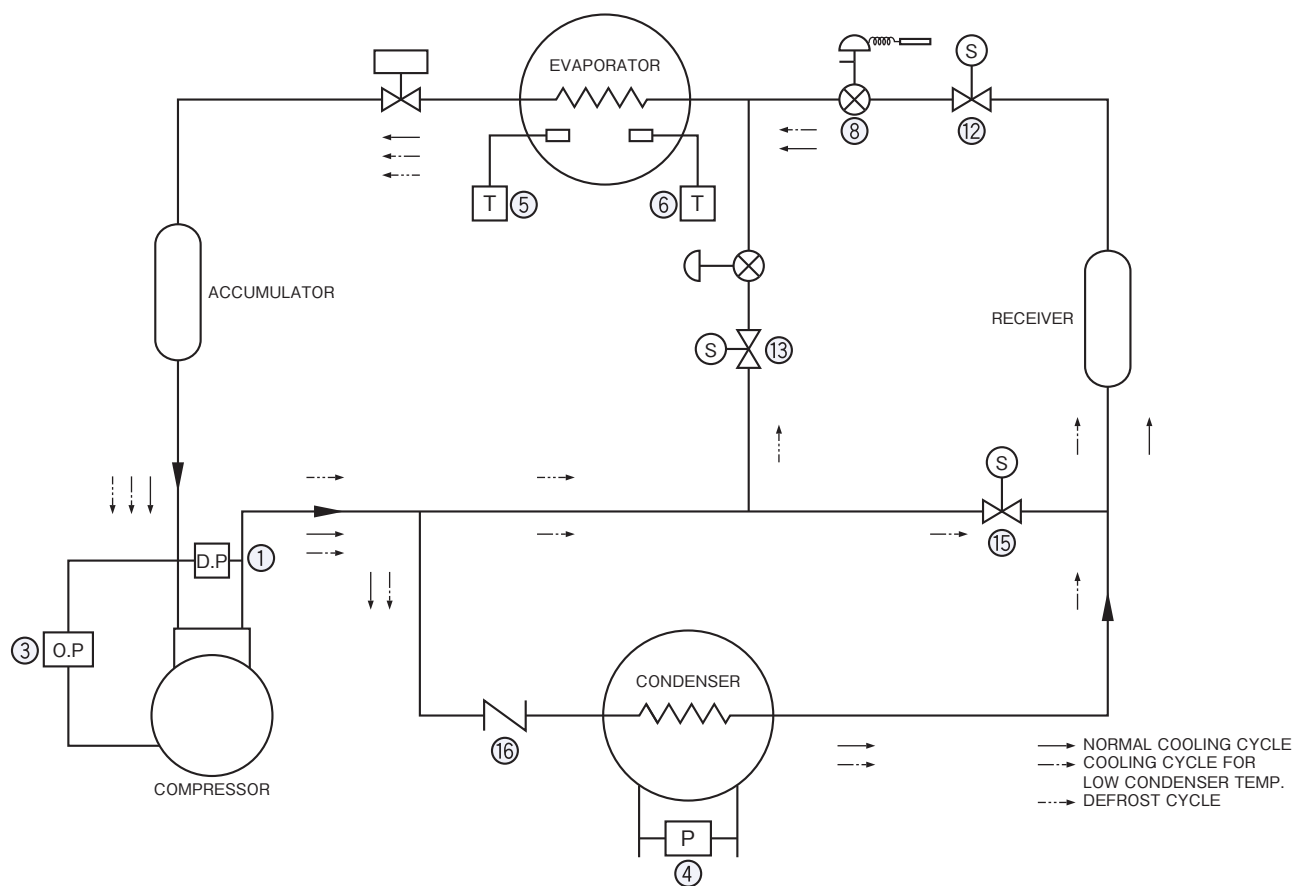

① Dual Pressure Controls
Type DYS



② Pressure Controls
Type SYS



③ Oil Protection Controls
Type ONS



④ Differential Pressure Controls
Type WNS



⑤ Temperature Controls
Type TNS



⑥ Temperature Controls
Type ALS




⑦ Electronic Step Thermostat
Type DSE



⑧ Thermostatic Expansion Valve
Type ATX



2). Heat Pump System...Chiller

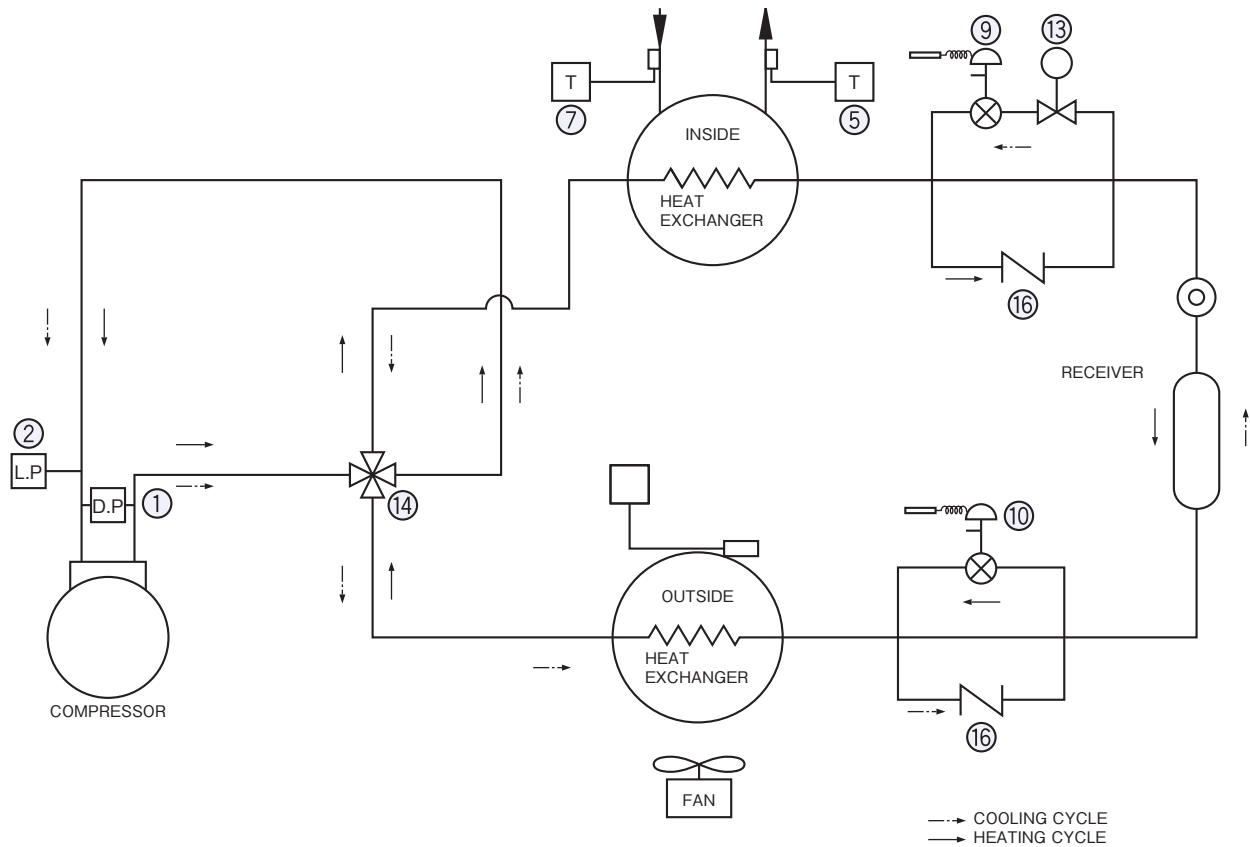


⑨ Thermostatic Expansion Valve
Type RCX



⑩ Thermostatic Expansion Valve
Type SCX



⑫ Solenoid Valve
Type REV...E



⑬ Solenoid Valve
Type REV...B



⑭ 4-Way Reversing Valve
Type STF



⑮ Solenoid Valve
Type VPV



⑯ Check Valve
Type BCV



APPROVAL STANDARD LIST

- Our products are listed by type number. In some types of products, not all models are listed.
- Some approved items have special catalog number for the listing.
- Some approved items require extra charges.
- Please contact the company for details.

Standard for safety

	Type Number		
CE	Pressure Controls	Temperature Controls	Solenoid Valves
	ANS(W)(P), DNS(W)(P) FNS(W)(P), HNS(W) ONS(W), SNS(W)(P) WNS(W), DYS, SYS ETB, FTB, HTB LTB, ACB, LCB, CCB XSK, NSK, YNS	CNS(W)(P), INS(W) TNS(W)(P)	REV, WEV, RPV, STF BPV, VPV, SEV, HPV
	Flow Switches	Fan Speed Controllers	
	FQS	RGE, XGE	
UL	Pressure Controls	Temperature Controls	Solenoid Valves
	DNS, HNS, SNS, WNS ETB, FTB, HTB, LTB, SYS ACB, XSK, NSK, DYS	CNS, TNS, EWS FWS, LWS, RWS	TEV, VPV, STF
	Flow Switches	Electronic Expansion Valves	Fan Speed Controllers
	FQS	AKV, UKV, VKV	RGE, XGE
CQC	Pressure Controls	Solenoid Valves	Electronic Expansion Valves
	DYS, SYS, ACB, LCB, NSK SNS, HNS, YNS, ONS, WNS	RPV, STF, TEV-S	UKV
		Fan Speed Controllers	
		RGE	
CSA	Pressure Controls		Fan Speed Controllers
	ETB, FTB, HTB, LTB, ACB, DNS, SNS		RGE, XGE
IECEE	Pressure Controls		
	ETB, FTB, HTB, LTB, ACB, LCB, SNS, HNS, WNS, YNS, ONS, DYS, SYS		
DIN	Pressure Controls		
	ACB, DNS, SNS		
VDE	Pressure Controls		
	ETB, FTB, HTB, LTB, ACB		
	Solenoid Valves		
	STF(01~20, H01, H02)		

Standard for marine

	Type Number	
	Pressure Controls	Temperature Controls
LR	ANS, DNS FNS, HNS, ONS SNS, WNS, YNS	CNS, INS, TNS
DNV · GL	ANS, DNS FNS, HNS, ONS SNS, WNS, YNS	CNS, INS, TNS
BV	ANS, DNS FNS, HNS, ONS SNS, WNS, YNS	CNS, INS, TNS
ABS	ANS, DNS, FNS HNS, ONS, SNS WNS, YNS	CNS, INS, TNS
NK	ANS, DNS FNS, HNS, ONS SNS, WNS, YNS	CNS, INS, TNS

LR (Lloyd's Register of Shipping)...England
 DNV·GL (Det Norske Veritas and Germanischer Lloyd)...
 (Norway and Germany)
 BV (Bureau Veritas)...France
 ABS (American Bureau of Shipping)...America
 NK (Nippon Kaiji Kyokai)...Japan

International Protection Standard

Type Number	International Protection
Pressure Controls	
ONS, WNS, YNS, DYS SYS, ETB, FTB, HTB, LTB	IP20
ANS, FNS, HNS	IP20(Standard type) IP44(When adding cover.)
ANS(W), DNS(W), FNS(W) HNS(W), ONS(W), SNS(W) WNS(W)	IP62
ANS(P), DNS(P), FNS(P) SNS(P), NSK(BH)	IP66
Temperature Controls · Humidity Controls	
EWS, FWS, LWS, RWS CNS, INS, TNS, ALS, BLS PWS, ARS, WRS, AHS	IP20
*1 ALE, BLE	IP44
CNS(W), INS(W), TNS(W)	IP62
CNS(P), TNS(P)	IP66

Type Number	International Protection
Pulse Converters	
LNE	IP20
Solenoid Valves	
REV(W), UEV(W), WEV(W)	IP34
RPV(DIN plug)	IP65
RPV(Read wire)	IP67
Damper & Valve Motor Actuators	
EGK, WGK	IP62
Flow Switches	
FQS(standard Type)	IP20
FQS(Drip proof models)	IP62
Fan Speed Controllers	
RGE	IP54
XGE	IP65
Temperature Recorders	
AKM	IP20

* 1 When using the mounting bracket, the degree of protection between the front of the product and the bracket.

- Basically, the IP protection level of this catalog is based on the measured value of JIS C 0920.
- The above IP protection grade is a general benchmark for the selected product.
- If you need a certificate issued by an external agency, please contact us.

PRESSURE CONTROLS

SMALL PRESSURE CONTROLS	9–10
Type ACB & LCB	
SMALL PRESSURE CONTROLS	11–12
Type LTB, ETB, HTB & FTB	
SINGLE FUNCTION PRESSURE CONTROLS	13–14
Type SNS & HNS	
DUAL PRESSURE CONTROLS	15–16
Type DNS	
SINGLE FUNCTION PRESSURE CONTROLS	17
Type SYS	
DUAL PRESSURE CONTROLS	18
Type DYS	
PRESSURE CONTROLS WITH NARROW DIFFERENTIAL ..	19–20
Type FNS & ANS	
OIL PROTECTION CONTROLS	21–22
Type ONS	
DIFFERENTIAL PRESSURE CONTROLS	23
Type WNS & YNS	
PRESSURE SENSORS	25–27
Type NSK & XSK	

SMALL PRESSURE CONTROLS (DISC TYPE)

High Volume OEM Item

Type ACB & LCB

SAGINO MIYA

GENERAL DESCRIPTION

- Pressure Control CB series are disc type small pressure controls featuring compact structure and field proven high quality.
- It is designed to suit modern designed application with its compact and various type of connection styles, such application as air conditioning, automobile industries and others.

Type ACB...High & medium pressure range

Type LCB...Low pressure range

CE mark applicable (available upon request for Type ACB & Type LCB)

UL recognized (available upon request for Type ACB)



Type ACB, LCB



Type ACB, LCB

SPECIFICATIONS

- Ambient temperature: -30 to 100°C

STANDARD TYPE NUMBER SELECTION

Type ACB & LCB

Unit: MPa {kgf/cm²}

Catalog No.	Contact Functions	Range		Max. Pressure	Pressure Connections	Terminal Construction (DIMENSION)	Application	Wt. (kg)
		Off	On					
ACB	SPST (High Cut) (A)	4.2 {42}	3.3 {33}	4.5 {45}	1/4" Solder OR Female Flare	Open(① ・ ③) OR Water Proof (② ・ ④)	High Pressure Cut Out	Open (0.03) Water Proof (0.06)
		3.1 {31}	2.4 {24}					
		2.8 {28}	2.2 {22}					
		2.6 {26}	2.1 {21}					
	SPST(High Cut) + Manual Reset (B)	2.3 {23}	1.8 {18}			Water Proof(⑤)		0.06
		2.8 {28}	2.1 {21}					
		2.6 {26}	2.0 {20}					
	SPDT (C)	2.3 {23}	1.8 {18}			Open(⑥) OR Water Proof(⑦)		Open (0.03) Water Proof (0.06)
		2.8 {28}	2.2 {22}					
		2.6 {26}	2.1 {21}					
	SPDT + Manual Reset (D)	2.3 {23}	1.8 {18}			Water Proof(⑧)		0.08
		2.8 {28}	2.1 {21}					
2.6 {26}		2.0 {20}						
LCB	SPST (Low Cut) (E)	0.22 {2.2}	0.36 {3.6}	1.5 {15}		Open(① ・ ③) OR Water Proof (② ・ ④)	Low Pressure Cut Out	Open (0.03) Water Proof (0.06)
		0.17 {1.7}	0.27 {2.7}					
		0.07 {0.7}	0.17 {1.7}					
		0.05 {0.5}	0.15 {1.5}					


ELECTRICAL RATINGS

Type ACB & LCB

Category of Ratings			M Rating			L Rating			T Rating
Rated Current (A)	Rated Voltage (V)	Power Factor (cos ϕ)	125V.AC	250V.AC	12V.DC	125V.AC	250V.AC	12V.DC	12/24V.DC
	Non-Inductive Current		1	1 to 6	1 to 4	0.02 to 2	0.02 to 1	0.05 to 0.1	0.01 to 0.05
	Inductive Current	Full Load	0.75						
Inrush Current		—	1 to 24	1 to 16	—	0.02 to 8	0.02 to 4	—	—

CONTACT FUNCTIONS


Type ACB & LCB

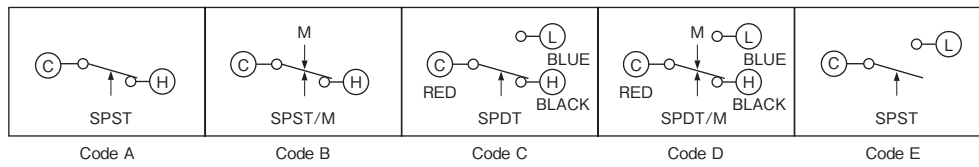

↑ : Operating direction on press. increase at High Press.Side
M ↓ : Operating direction on manual reset


PRESSURE CONNECTIONS

Unit: mm

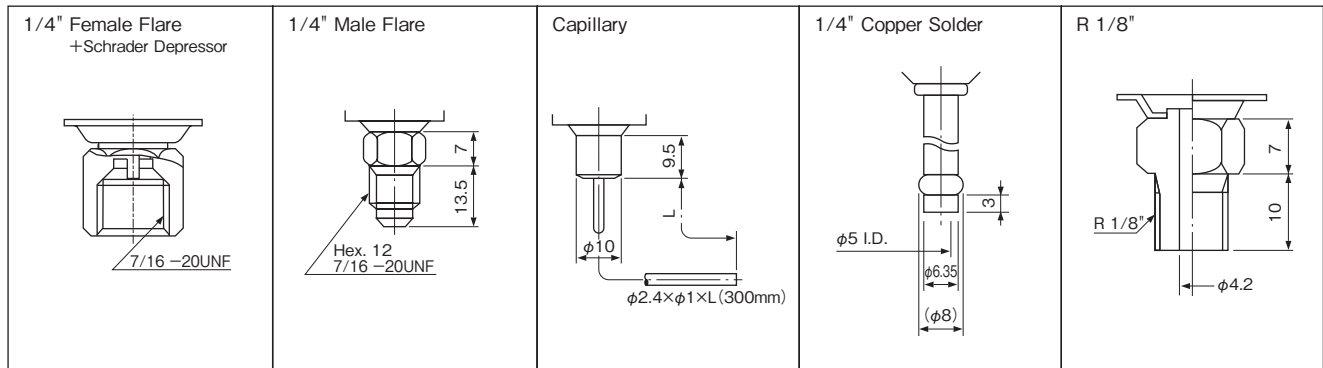

DIMENSIONS

Unit: mm

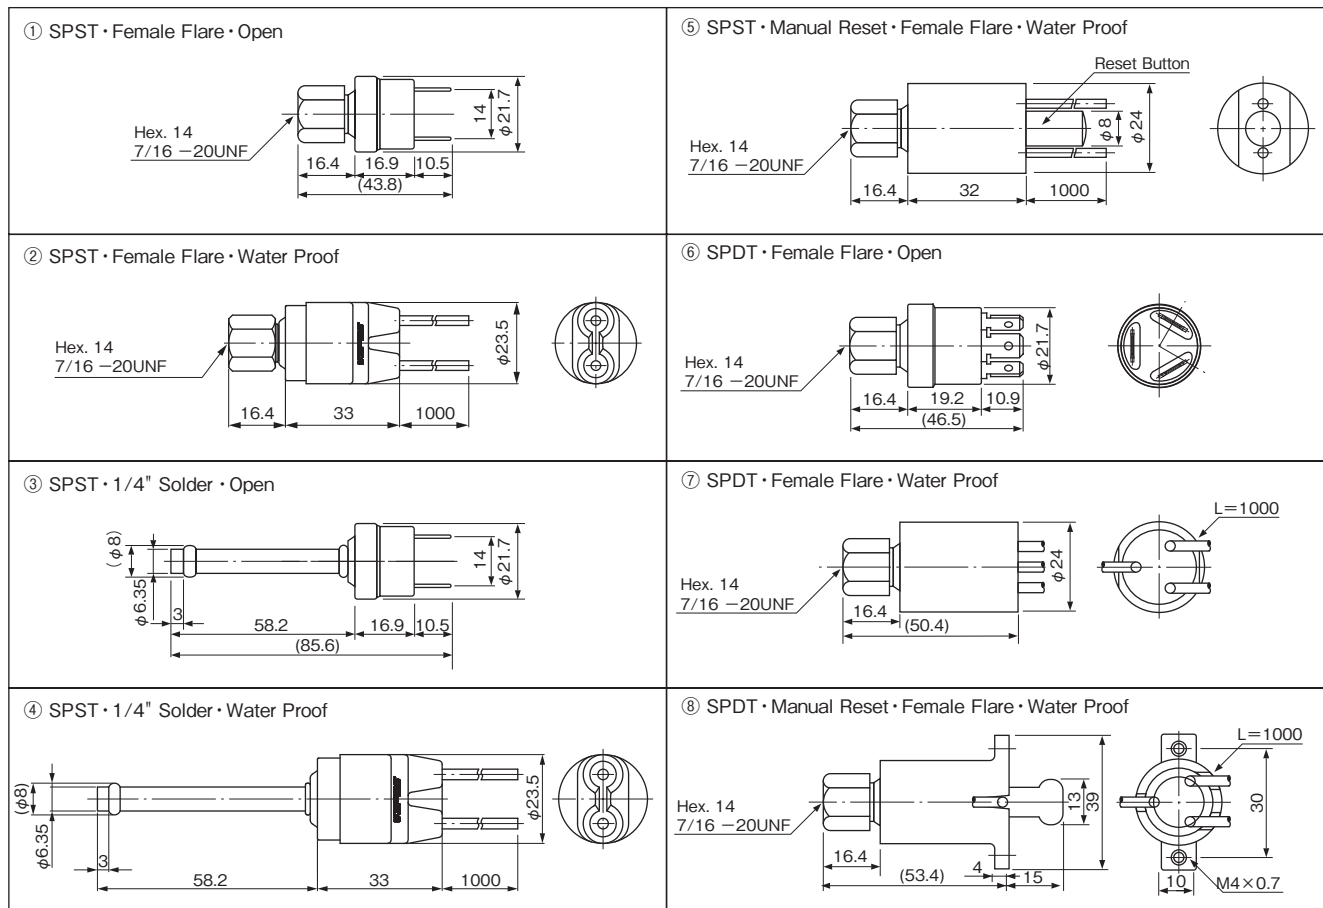

SMALL PRESSURE CONTROLS

High Volume OEM Item

Type LTB, ETB, HTB & FTB


SAGINO MIYA

GENERAL DESCRIPTION


- Factory set pressure switch designed for use in refrigeration units of quantity production such as room air conditioner (heat pump), packaged air conditioner (heat pump), water chiller etc.
- With SPDT contact mechanism.
- Models identified with electrical rating code L can be used for minimum 0.02A/125V.AC rating.
- Models with 0.78 to 1.96 MPa {8 to 20 kgf/cm²} range are also available for HTB and FTB.
- Models with 0.098 MPa {1 kgf/cm²} differential are also available for HTB (max. range limit: 1.27 MPa {13 kgf/cm²}).

CE mark applicable (available upon request)

UL recognized (available upon request)



Type HTB



Type FTB

SPECIFICATIONS

- Fluid temperature: -20 to 120°C
- Ambient temperature: -20 to 70°C

TYPE NUMBER SELECTION

Unit: MPa {kgf/cm²}

Catalog No.	Application	Range		Differential	Factory Setting		Max. Working Pressure	Pressure Connections	* Electrical Ratings	Wt. (kg)		
		Min.	Max.		On	Off						
LTB-A301	Low Pressure	0	0.392 {4}	0.059 to 0.147 {0.6 to 1.5}	0.294 {3}	0.196 {2}	1.5 {15}	①	H	0.08		
LTB-A302									M			
LTB-A303									L			
LTB-A304								②	H			
LTB-A305									M			
LTB-A306									L			
ETB-A301		0.098 {1}	0.245 {2.5}	Automatic operation on pressure decrease and manual reset on pressure increase	Manual Reset	0.098 {1}	1.5 {15}	①	H	0.1		
ETB-A302									M			
ETB-A303									L			
ETB-A304								②	H			
ETB-A305									M			
ETB-A306									L			
HTB-A301	High Pressure	0.78 {8}	1.96 {20}	0.29 to 0.49 {3 to 5}	1.96 {20}	2.45 {25}	3.3 {33}	①	H	0.09		
HTB-A302									M			
HTB-A303									L			
HTB-A304		1.96 {20}	2.94 {30}	0.29 to 0.69 {3 to 7}				②	H			
HTB-A305									M			
HTB-A306									L			
FTB-A301		0.78 {8}	2.94 {30}	Automatic operation on pressure increase and manual reset on pressure decrease	Manual Reset			2.45 {25}	3.3 {33}	①	H	0.1
FTB-A302											M	
FTB-A303											L	
FTB-A304										②	H	
FTB-A305											M	
FTB-A306											L	


* Refer to Electrical Ratings Table in the list below.

ELECTRICAL RATINGS


Rated Voltage (V)		Terminal	Power Factor (cos φ)	H Rating		M Rating		L Rating	
				125V.AC	250V.AC	125V.AC	250V.AC	125V.AC	250V.AC
Non-Inductive Current		C-L	1	1 to 10	1 to 10	1 to 3	0.5 to 1.5	0.02 to 2	0.02 to 1
Inductive Current	Full Load		0.75	1 to 6	1 to 6	1 to 2	0.5 to 1		
	Inrush Current		—	1 to 24	1 to 24	1 to 8	0.5 to 4		
Non-Inductive Current		C-H	1	1 to 16	1 to 16	1 to 6	0.5 to 5	0.02 to 2	0.02 to 1
Inductive Current	Full Load		0.75	1 to 16	1 to 16	1 to 6	0.5 to 4		
	Inrush Current		—	1 to 64	1 to 64	1 to 24	0.5 to 16		

CONTACT FUNCTIONS


Type LTB & HTB



Type ETB (M2 : Manual Reset)





Type FTB (M1 : Manual Reset)



C	Common Terminal
L	Close on Pressure Increase
H	Close on Pressure Decrease

↑ : Operating direction on press. increase at High Press.Side
M1 ↓, M2 ↑ : Operating direction on manual reset


PRESSURE CONNECTIONS

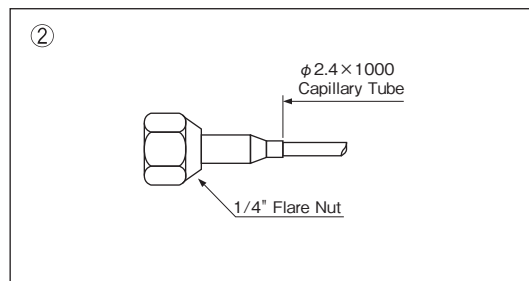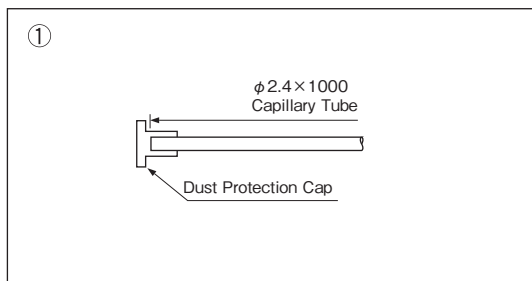


• 1/4" Solder Connection is also available upon request.

DIMENSIONS


Type LTB

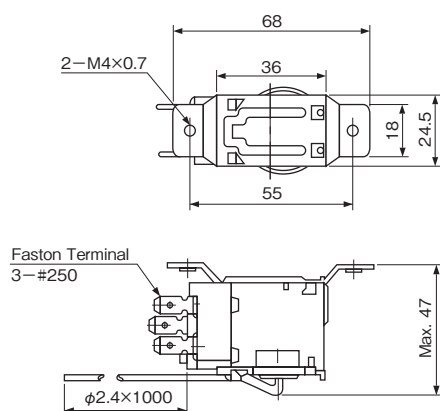


Type ETB

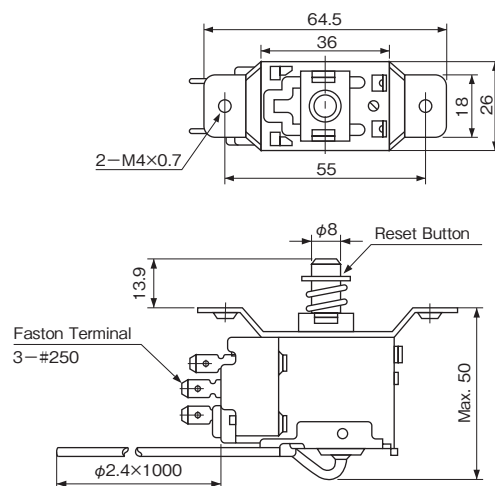

Type HTB

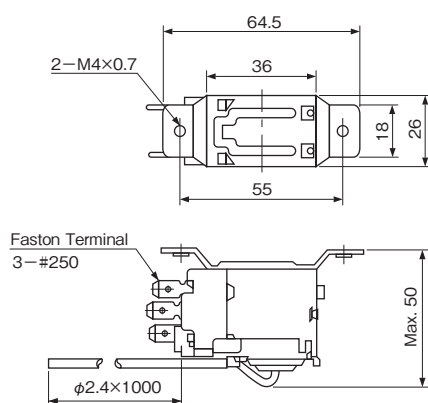

Type FTB

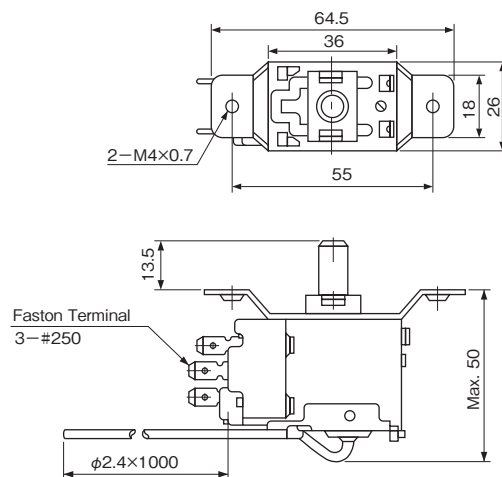

Unit: mm

SINGLE FUNCTION PRESSURE CONTROLS

Type SNS & HNS

SAGInoMIYA

GENERAL DESCRIPTION

- For use with fluorinated refrigerants as well as with air and water. (Allowable fluid temp.: -20 to 120°C)
- Type SNS for universal application.
- Type HNS for high pressure safety cut out.
- Available drip proof enclosure for marine application or explosion proof enclosure for special application.
- Mounting bracket is supplied as standard.
- With SPDT contact mechanism.
- IP44 with upper lid (option).
- Stainless steel models are available upon request.



Type SNS



Type HNS

CE mark applicable (available upon request)

UL recognized (available upon request)

SPECIFICATIONS

- Fluid temperature: -20 to 120°C
- Ambient temperature: -20 to 70°C

TYPE NUMBER SELECTION

Type SNS—Automatic reset type

Unit: MPa {kgf/cm²}

Catalog No.	Range		Differential		Factory Setting		Max. Working Pressure	Contact Function	Wt. (kg)
	Min.	Max.	Min.	Max.	Off (On)	On (Off)			
SNS-C101X	−0.06 {−50cmHg}	0.1 {1}	0.015 {0.15}	0.05 {0.5}	0.025 {0.25}	0.05 {0.5}	0.3 {3}	Diagram 1	0.33
SNS-C102X	−0.02 {−20cmHg}	0.2 {2}	0.025 {0.25}	0.15 {1.5}			0.5 {5}		
SNS-C103X	−0.06 {−50cmHg}	0.3 {3}	0.035 {0.35}	0.2 {2}	0.05 {0.5}	0.15 {1.5}	1 {10}		
SNS-C104X	−0.06 {−50cmHg}	0.4 {4}	0.04 {0.4}		0.1 {1}	0.2 {2}	1.5 {15}		
SNS-C106X	−0.06 {−50cmHg}	0.6 {6}	0.06 {0.6}	0.4 {4}	0.2 {2}	0.3 {3}			
SNS-C110X	0.1 {1}	1 {10}	0.1 {1}	0.3 {3}	0.4 {4}	0.6 {6}	3 {30}		
SNS-C120X	0.5 {5}	2 {20}	0.2 {2}	0.5 {5}	1.2 {12}	1.5 {15}			
SNS-C130X		3 {30}	0.3 {3}	1 {10}	2 {20}	2.5 {25}	3.3 {33}		
SNS-C135X	1 {10}	3.5 {35}	0.5 {5}	1.5 {15}	2.5 {25}	3 {30}	3.8 {38}		

Type SNS—Manual reset type

Unit: MPa {kgf/cm²}

Catalog No.	Range		Manual Reset	* Factory Setting		Max. Working Pressure	Contact Function	Wt. (kg)
	Min.	Max.		Off	On			
SNS-C102XM2	-0.02 {-20cmHg}	0.2 {2}	Automatic operation on pressure decrease, and manual reset on pressure increase ※1	0.025 {0.25}	Manual Reset	0.5 {5}	Diagram 2	0.33
SNS-C106XM2	-0.06 {-50cmHg}	0.6 {6}		0.2 {2}		1.5 {15}		
SNS-C130XM2	0.5 {5}	3 {30}		2 {20}		3.3 {33}		

* Based on the 1-3 terminal connection.

Type HNS—Automatic reset type

Unit: MPa {kgf/cm²}

Catalog No.	Range		Differential	* Factory Setting		Max. Working Pressure	Contact Function	Wt. (kg)
	Min.	Max.		Off	On			
HNS-C130X	0.8 {8}	3 {30}	0.3 to 0.5 {3 to 5}	2 {20}	1.6 {16}	3.3 {33}	Diagram 3	0.24

* Based on the 1-3 terminal connection.

Type HNS—Manual reset type

Unit: MPa {kgf/cm²}

Catalog No.	Range		Manual Reset	* Factory Setting		Max. Working Pressure	Contact Function	Wt. (kg)
	Min.	Max.		Off	On			
HNS-C130XM1	0.8 {8}	3 {30}	Automatic operation on pressure increase, and manual reset on pressure decrease ※2	2 {20}	Manual Reset	3.3 {33}	Diagram 4	0.24

* Based on the 1-3 terminal connection.

- Enclosure: IP20
- Drip Proof Models: Available upon request. (Refer to page 48, 49, 50, 51.)

※1 Please press the reset button after the pressure increased at specified point.

Pressure Range : 02 ... about 0.04 MPa

06 ... about 0.1 MPa


30 ... about 0.5 MPa

※2 Please press the reset button after the pressure decreased about 0.7 MPa or less.

ELECTRICAL RATINGS

Rated Voltage (V)		Power Factor (cos φ)	125/250V. AC
Rated Current (A)			
Non-Inductive Current		1	12
Inductive Current	Full Load	0.75	
	Inrush Current	—	72

PRESSURE CONNECTIONS



Standard

Refer to page 45, 46.

CONTACT FUNCTIONS




Diagram 1




Diagram 2




Diagram 3




Diagram 4


	Diagram 1 & 2	Diagram 3 & 4
1	Common Terminal	Common Terminal
3	Open on Pressure Increase	Open on Pressure Increase
5	Open on Pressure Decrease	Open on Pressure Decrease

↑ : Operating direction on press. increase at High Press. Side
M1 ↓ , M2 ↑ : Operating direction on manual reset

DIMENSIONS


Standard

Type SNS

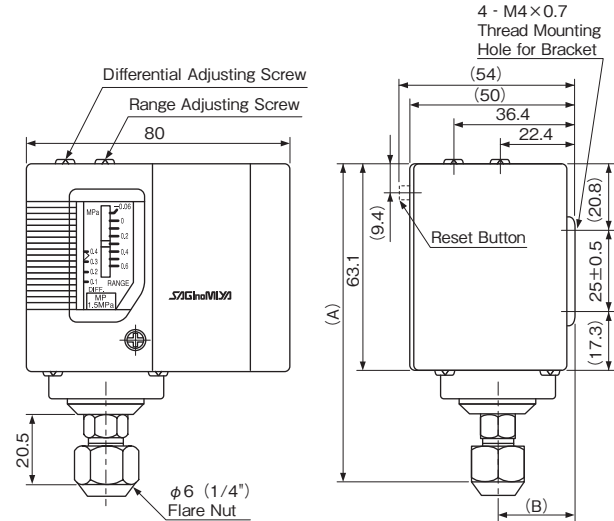

Catalog No.	Unit: mm	
	A	B
SNS-C101X	113.3	22.4
SNS-C102X	99.7	
SNS-C103X		
SNS-C104X	96.8	
SNS-C106X		
SNS-C110X		
SNS-C120X	95.9	18.4
SNS-C130X	93.5	
SNS-C135X		
SNS-C102XM2	99.7	22.4
SNS-C106XM2	96.8	
SNS-C130XM2	93.5	18.4

Type HNS

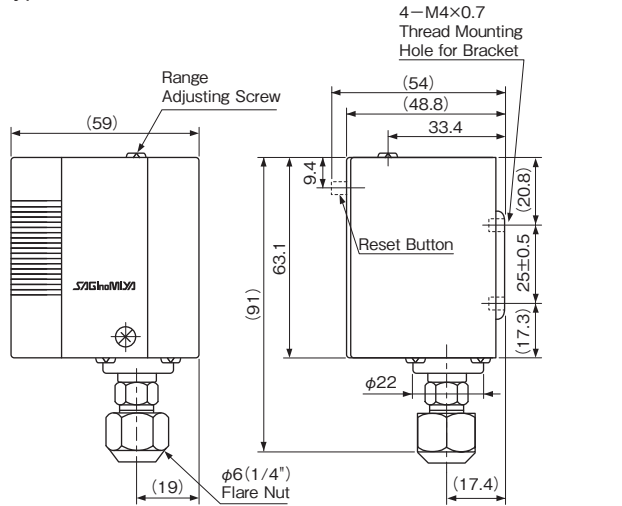

Unit: mm

DUAL PRESSURE CONTROLS

Type DNS

SAGHOMIYA

GENERAL DESCRIPTION

- For use with fluorinated refrigerants as well as with air and water. (Allowable Fluid Temp.: -20 to 120°C)
- Various contact functions are available.
- Available drip proof enclosure for marine application or explosion proof enclosure for special application.
- Mounting bracket is supplied as standard.
- IP44 with upper lid (option).
- Stainless steel models are available upon request.



CE mark applicable (available upon request)

UL recognized (available upon request)

SPECIFICATIONS

- Fluid temperature: -20 to 120°C
- Ambient temperature: -20 to 70°C

TYPE NUMBER SELECTION

Automatic reset type

Unit: MPa {kgf/cm²}

Catalog No.	Pressure Side	Range		Differential		Factory Setting		Max. Working Pressure	Contact Function	Wt. (kg)
		Min.	Max.	Min.	Max.	Off	On			
DNS-D304X	Low Side	-0.06 {-50cmHg}	0.4 {4}	0.04 {0.4}	0.2 {2}	0.1 {1}	0.2 {2}	1.5 {15}	Diagram 1	0.49
	High Side	0.8 {8}	3 {30}	Approx. 0.4 fixed {Approx. 4 fixed}		2 {20}	1.6 {16}	3.3 {33}		
DNS-D306X	Low Side	-0.06 {-50cmHg}	0.6 {6}	0.06 {0.6}	0.4 {4}	0.2 {2}	0.3 {3}	1.5 {15}		
	High Side	0.8 {8}	3 {30}	Approx. 0.4 fixed {Approx. 4 fixed}		2 {20}	1.6 {16}	3.3 {33}		
DNS-D604X	Low Side	-0.06 {-50cmHg}	0.4 {4}	0.04 {0.4}	0.2 {2}	0.1 {1}	0.2 {2}	1.5 {15}	Diagram 3	
	High Side	0.8 {8}	3 {30}	Approx. 0.4 fixed {Approx. 4 fixed}		2 {20}	1.6 {16}	3.3 {33}		
DNS-D606X	Low Side	-0.06 {-50cmHg}	0.6 {6}	0.06 {0.6}	0.4 {4}	0.2 {2}	0.3 {3}	1.5 {15}		
	High Side	0.8 {8}	3 {30}	Approx. 0.4 fixed {Approx. 4 fixed}		2 {20}	1.6 {16}	3.3 {33}		

Manual reset type

Unit: MPa {kgf/cm²}

Catalog No.	Pressure Side	Range		Differential		Factory Setting		Max. Working Pressure	Contact Function	Wt. (kg)
		Min.	Max.	Min.	Max.	Off	On			
DNS-D304XM	Low Side	−0.06 {−50cmHg}	0.4 {4}	0.04 {0.4}	0.2 {2}	0.1 {1}	0.2 {2}	1.5 {15}	Diagram 2	0.49
	High Side	0.8 {8}	3 {30}	Automatic operation on pressure increase, and manual reset on pressure decrease ※2		2 {20}	manual reset	3.3 {33}		
DNS-D306XM	Low Side	−0.06 {−50cmHg}	0.6 {6}	0.06 {0.6}	0.4 {4}	0.2 {2}	0.3 {3}	1.5 {15}		
	High Side	0.8 {8}	3 {30}	Automatic operation on pressure increase, and manual reset on pressure decrease ※2		2 {20}	manual reset	3.3 {33}		
DNS-D604XM	Low Side	−0.06 {−50cmHg}	0.4 {4}	0.04 {0.4}	0.2 {2}	0.1 {1}	0.2 {2}	1.5 {15}	Diagram 4	
	High Side	0.8 {8}	3 {30}	Automatic operation on pressure increase, and manual reset on pressure decrease ※2		2 {20}	manual reset	3.3 {33}		
DNS-D606XM	Low Side	−0.06 {−50cmHg}	0.6 {6}	0.06 {0.6}	0.4 {4}	0.2 {2}	0.3 {3}	1.5 {15}		
	High Side	0.8 {8}	3 {30}	Automatic operation on pressure increase, and manual reset on pressure decrease ※2		2 {20}		3.3 {33}		
DNS-D606XMM	Low Side	−0.06{−50cmHg}	0.6 {6}	Automatic operation on pressure decrease, and manual reset on pressure increase ※1		0.2 {2}	manual reset	1.5 {15}	Diagram 5	
	High Side	0.8 {8}	3 {30}	Automatic operation on pressure increase, and manual reset on pressure decrease ※2		2 {20}		3.3 {33}		

- Enclosure: IP20
- Drip Proof Models: Available upon request. (Refer to Pages 49, 50.)

※1 Please press the reset button after the pressure increased about 0.1 MPa or more.

※2 Please press the reset button after the pressure decreased about 0.7 MPa or less.

ELECTRICAL RATINGS

Rated Voltage (V)		Power Factor (cos ϕ)	125/250V. AC
Rated Current (A)			
Non-Inductive Current		1	12
Inductive Current	Full Load	0.75	
	Inrush Current	—	72

Minimum contact capacity: 50mA

CONTACT FUNCTIONS




Diagram 1




Diagram 2




Diagram 3




Diagram 4





Diagram 5

↑ L: Operating direction on press. increase at Low Press. Side
 ↑ H: Operating direction on press. increase at High Press. Side
 ↓ M: Operating direction on manual reset

PRESSURE CONNECTIONS





1/4" Flare
 7/16-20 Thread

Standard

Refer to Pages 45, 46

DIMENSIONS

Standard Model

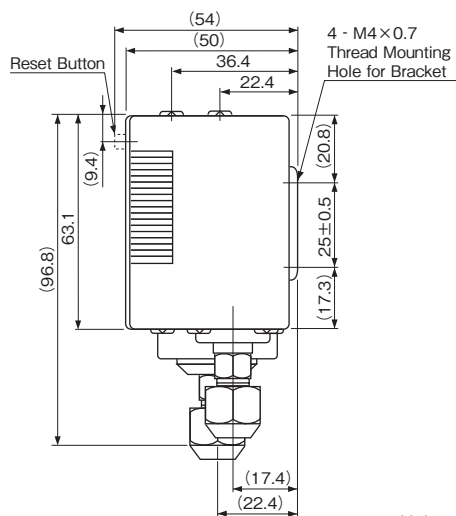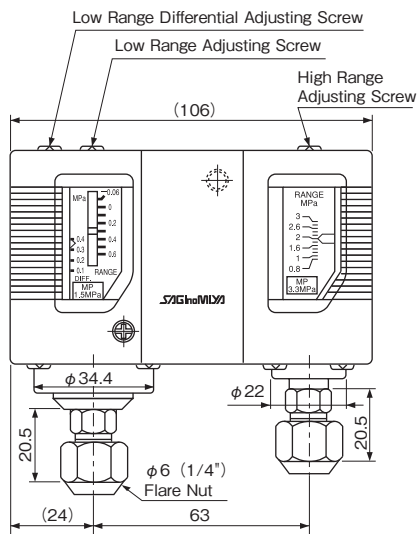

Unit: mm

SINGLE FUNCTION PRESSURE CONTROLS

Type SYS

SAGInoMIA

GENERAL DESCRIPTION

- Type SYS is standard model. Reliable performance, and long life products.
- Applicable for R410A (SYS-C140X0)
- Scale plate with significantly clear visibility
- Compact and light weight

CE mark applicable (available upon request)

SPECIFICATIONS

- Fluid temperature: -20 to 120°C
- Ambient temperature: -20 to 70°C

TYPE NUMBER SELECTION

Automatic reset type

Unit: MPa {kgf/cm²}

*1 Catalog No.	*2 Refrigerant	Range		Differential		Factory Setting		Max. Working Pressure	Contact Function	Wt. (kg)
		Min.	Max.	*3 Min.	Max.	Off (On)	On (Off)			
SYS-C103X0	R404A, R407C R134a, R22	-0.06 {-50cmHg}	0.3 {3}	0.035 {0.35}	0.2 {2}	0.05 {0.5}	0.15 {1.5}	1.65 {16.5}	Diagram 1	0.25
SYS-C106X0			0.6 {6}	0.06 {0.6}	0.4 {4}	0.2 {2}	0.3 {3}			
SYS-C110X0			0.1 {1}	0.1 {1}	0.3 {3}	0.4 {4}	0.6 {6}			
SYS-C130X0			0.5 {5}	0.3 {3}	1 {10}	1.5 {15}	2 {20}			
SYS-C135X0	R410A etc.	1 {10}	3.5 {35}	0.5 {5}	1.5 {15}	2 {20}	2.5 {25}	3.8 {38}		
SYS-C140X0			4.3 {43}		1 {10}			4.7 {47}		

Manual reset type

Unit: MPa {kgf/cm²}

*1 Catalog No.	*2 Refrigerant	Range		Manual Reset	Factory Setting		Max. Working Pressure	Contact Function	Wt. (kg)
		Min.	Max.		Off (On)	On (Off)			
SYS-C106X0M2	R404A, R407C	-0.06 {-50cmHg}	0.6 {6}	Automatic operation on pressure decrease and manual reset on pressure increase	0.2 {2}	Manual	1.65 {16.5}	Diagram 2	0.25
SYS-C130X0M2	R134a, R22	0.5 {5}	3 {30}		1.5 {15}	Reset	3.3 {33}		

• Enclosure: IP20

*1 Standard unit display is MPa. Other unit displays are available upon request by changing "X0" portion of a catalog number.

[X0: MPa, X1: bar, X2: kgf/cm², X3: kPa, X4: lb/in², X5: psi]

*2 The products other than SYS-C140X0 are not compatible with R410A refrigerant.

*3 Indicates the average value also considering instrumental errors.

ELECTRICAL RATINGS

Rated Voltage (V)		Power Factor (cos ϕ)	125/250V. AC
Rated Current (A)			
Non-Inductive Current		1	12
Inductive Current	Full Load	0.75	
	Inrush Current	—	72

Minimum contact capacity: 50mA

CONTACT FUNCTIONS




Diagram 1






Diagram 2

Diagram 1 & 2	
1	Common Terminal
3	Close on Pressure Increase
5	Close on Pressure Decrease

↑: Operating direction on press. increase at High Press. Side

M2↑: Operating direction on manual reset

DIMENSIONS

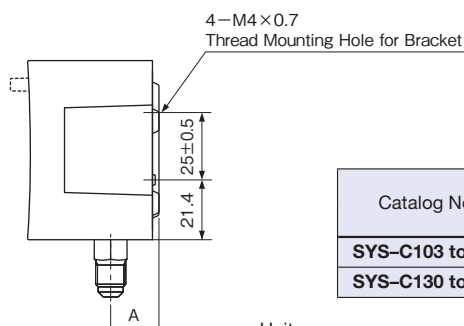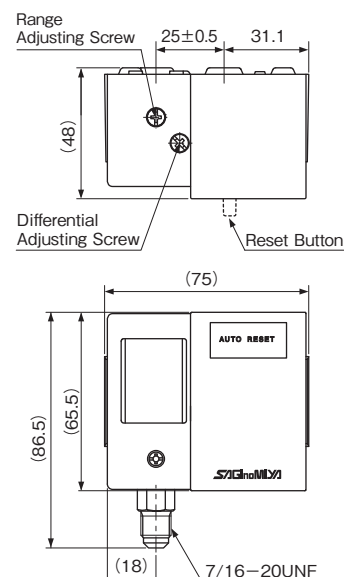

Unit: mm

Catalog No.	Unit: mm
	A
SYS-C103 to 110	17.7
SYS-C130 to 140	16.7

DUAL PRESSURE CONTROLS

Type DYS

SAGInoMIYA

GENERAL DESCRIPTION

- Type DYS is dual pressure controls that is integrated with over pressure protection of the high pressure side and control of low pressure side of the refrigeration unit.
- Scale plate with significantly clear visibility
- Compact and light weight

CE mark applicable (available upon request)



SPECIFICATIONS

- Fluid temperature: -20 to 120°C
- Ambient temperature: -20 to 70°C

TYPE NUMBER SELECTION

Automatic reset type

Unit: MPa {kgf/cm²}

*1										Unit: mmHg (kg/cm ²)	
Catalog No.	Pressure Side	Range		Differential		Factory Setting		Max. Working Pressure	Contact Function	Wt. (kg)	
		Min.	Max.	*2 Min.	Max.	Off	On				
DYS-D306X0	Low Side	−0.06 {−50cmHg}	0.6 {6}	0.06 {0.6}	0.4 {4}	0.2 {2}	0.3 {3}	1.65 {16.5}	Diagram 1	0.40	
	High Side	0.8 {8}	3 {30}	Approx.0.5 fixed. {Approx.5 fixed.}		2 {20}	1.5 {15}	3.3 {33}			
DYS-D606X0	Low Side	−0.06 {−50cmHg}	0.6 {6}	0.06 {0.6}	0.4 {4}	0.2 {2}	0.3 {3}	1.65 {16.5}	Diagram 3		
	High Side	0.8 {8}	3 {30}	Approx.0.5 fixed. {Approx.5 fixed.}		2 {20}	1.5 {15}	3.3 {33}			

Manual reset type

Unit: MPa {kgf/cm²}

*1 Catalog No.	Pressure Side	Range		Differential		Factory Setting		Max. Working Pressure	Contact Function	Wt. (kg)
		Min.	Max.	*2 Min.	Max.	Off	On			
DYS-D306X0M	Low Side	−0.06 {−50cmHg}	0.6 {6}	0.06 {0.6} 0.4 {4}		0.2 {2}	0.3 {3}	1.65 {16.5}	Diagram 2	0.40
	High Side	0.8 {8}	3 {30}	Automatic operation on pressure increase and manual reset on pressure decrease		2 {20}	manual reset	3.3 {33}		
DYS-D606X0M	Low Side	−0.06{−50cmHg}	0.6 {6}	0.06 {0.6} 0.4 {4}		0.2 {2}	0.3 {3}	1.65 {16.5}	Diagram 4	
	High Side	0.8 {8}	3 {30}	Automatic operation on pressure increase and manual reset on pressure decrease		2 {20}	manual reset	3.3 {33}		
DYS-D606X0MM	Low Side	−0.06{−50cmHg}	0.6 {6}	Automatic operation on pressure decrease and manual reset on pressure increase		0.2 {2}		1.65 {16.5}	Diagram 5	
	High Side	0.8 {8}	3 {30}	Automatic operation on pressure increase and manual reset on pressure decrease		2 {20}		3.3 {33}		



• Enclosure: IP20

*1 Standard unit display is MPa. Other unit displays are available upon request by changing "X0" portion of a catalog number.

[X0: MPa, X1: bar, X2: kgf/cm², X3: kPa, X4: lb/in², X5: psi]

*2 Indicates the average value also considering instrumental errors.

DIMENSIONS

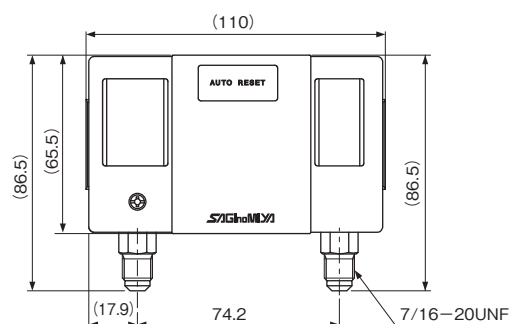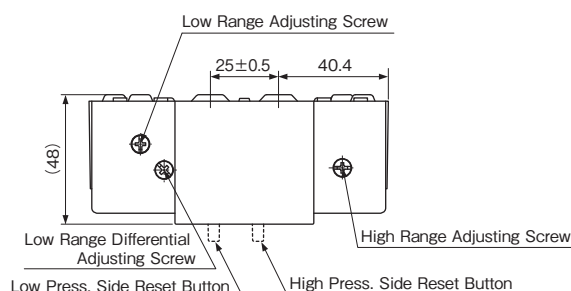

CONTACT FUNCTIONS

Refer to Pages 16

ELECTRICAL RATINGS

Rated Voltage (V)		Power Factor (cos ϕ)	125/250V AC
Rated Current (A)			
Non-Inductive Current		1	12
Inductive Current	Full Load	0.75	
	Inrush Current	—	72

Minimum contact capacity: 50mA

Unit: mm

PRESSURE CONTROLS WITH NARROW DIFFERENTIAL

Type FNS & ANS

SAGInoMIYA

GENERAL DESCRIPTION

- For use with fluorinated refrigerants as well as with air and water.
- Type FNS with fixed narrow differential
- Type ANS with adjustable narrow differential
- Available drip proof enclosure for marine application or explosion proof enclosure for special application.
- Mounting bracket is supplied as standard.
- With SPDT contact mechanism.
- IP44 with upper lid (option). ·····Type FNS
- Stainless steel models are available upon request.

CE mark applicable (available upon request)



Type FNS



Type ANS

SPECIFICATIONS

- Fluid temperature: -20 to 120°C
- Ambient temperature: -20 to 70°C

TYPE NUMBER SELECTION

Type FNS – Fixed narrow differential type

Unit: MPa {kgf/cm²}

Type FNS - Fixed narrow differential type							Unit: MPa (kg/cm ²)
Catalog No.	Range		Differential	Factory Setting		Max. Working Pressure	Wt. (kg)
	Min.	Max.	Fixed	Off	On		
FNS-C101X	-0.06 {-50cmHg}	0.1 {1}	0.006 Approx. {0.06 Approx.}	(0.019) {(0.19)}	0.025 {0.25}	0.3 {3}	0.32
FNS-C102X	-0.02 {-20cmHg}	0.2 {2}	0.008 Approx. {0.08 Approx.}	(0.042) {(0.42)}	0.05 {0.5}	0.5 {5}	
FNS-C106X	-0.06 {-50cmHg}	0.6 {6}	0.02 Approx. {0.2 Approx.}	(0.28) {(2.8)}	0.3 {3.0}	1.5 {15}	
FNS-C110X	0.1 {1}	1 {10}	0.025 Approx. {0.25 Approx.}	(0.575) {(5.75)}	0.6 {6.0}		
FNS-C130X	0.5 {5}	3 {30}	0.12 Approx. {1.2 Approx.}	(2.38) {(23.8)}	2.5 {25}	3.3 {33}	

Type ANS – Adjustable narrow differential type

Unit: MPa {kgf/cm²}


Catalog No.	Range		Differential				Factory Setting		Max. Working Pressure	Wt. (kg)
			Min.		Max.					
	Min.	Max.	Bottom	Top	Bottom	Top	Off	On		
ANS-C101XB	−0.06 {−50cmHg}	0.1 {1}	0.007 {0.07}	0.007 {0.07}	0.014 {0.14}	0.015 {0.15}	0.018 {0.18}	0.025 {0.25}	0.3 {3}	0.32
ANS-C103XB	−0.02 {−20cmHg}	0.3 {3}	0.008 {0.08}	0.01 {0.1}	0.018 {0.18}	0.027 {0.27}	0.141 {1.41}	0.15 {1.5}	1 {10}	
ANS-C106XB	−0.06 {−50cmHg}	0.6 {6}	0.015 {0.15}	0.018 {0.18}	0.03 {0.3}	0.045 {0.45}	0.28 {2.84}	0.3 {3.0}	1.5 {15}	
ANS-C110XB	0.1 {1}	1 {10}	0.02 {0.2}	0.03 {0.3}	0.045 {0.45}	0.07 {0.7}	0.575 {5.75}	0.6 {6.0}		
ANS-C130XB	0.5 {5}	3 {30}	0.12 {1.2}	0.2 {2.0}	0.23 {2.3}	0.37 {3.7}	2.32 {23.2}	2.5 {25}	3.3 {33}	
ANS-C135XB	1 {10}	3.5 {35}			0.24 {2.4}	0.39 {3.9}	2.82 {28.2}	3 {30}	3.8 {38}	

- Enclosure: IP20
- Drip Proof Models: Available upon request. (Refer to page 51.)

ELECTRICAL RATINGS

Rated Voltage (V)		Power Factor (cos φ)	125/250V. AC
Rated Current (A)			
Non-Inductive Current		1	12
Inductive Current	Full Load	0.75	
	Inrush Current	—	72


CONTACT FUNCTIONS



1	Common Terminal
3	Close on Pressure Increase
5	Close on Pressure Decrease

↑ : Operating direction on press. increase at High Press. Side

PRESSURE CONNECTIONS




Standard

Refer to page 45, 46.


DIMENSIONS

Standard Model
Type FNS

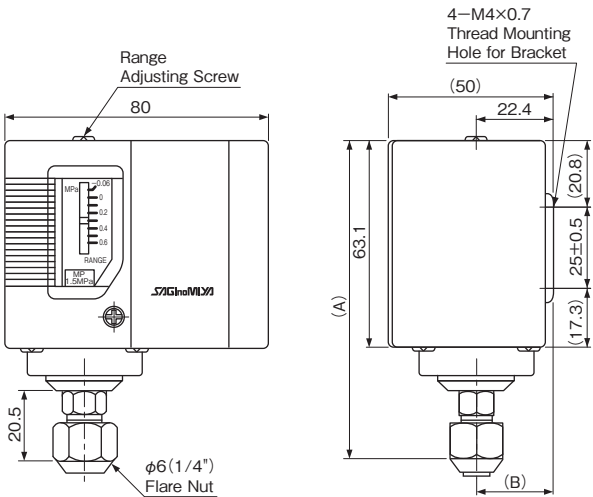

Catalog No.	Unit: mm	
	A	B
FNS-C101X	113.3	22.4
FNS-C102X	99.7	
FNS-C106X	96.8	
FNS-C110X	96.8	
FNS-C130X	93.5	18.4

Type ANS

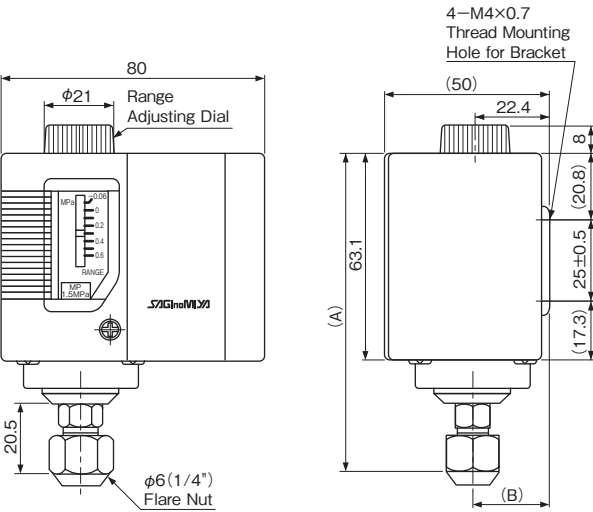

Unit: mm

Catalog No.	Unit: mm	
	A	B
ANS-C101XB	113.3	22.4
ANS-C103XB	99.7	
ANS-C106XB	96.8	
ANS-C110XB	96.8	
ANS-C130XB	93.5	18.4
ANS-C135XB	93.5	

OIL PROTECTION CONTROLS

Type ONS

SAGINO MIYA

GENERAL DESCRIPTION

- Provides dependable protection against major break-down on pressure lubricated refrigeration compressors by guarding against low lubrication oil pressure.
- With manual reset.
- Built in time delay switch.
- Mounting bracket is supplied as standard.
- Stainless steel models are available upon request.

CE mark applicable (available upon request)

SPECIFICATIONS

- Fluid temperature: -20 to 120°C
- Ambient temperature: -20 to 70°C



TYPE NUMBER SELECTION

Unit: MPa {kgf/cm²}

Catalog No.	Range		Differential	Timer Specification			Connection	Wt. (kg)
	Min.	Max.	Fixed	Delay Time(sec.)	Timer Voltage	Timer Circuit		
ONS-C106XQ1	0.05 {0.5}	0.35 {3.5}	Approx. 0.05 { Approx. 0.5 }	45	100/200V. AC	Standard (SPST) without Alarm Contact	1/4" Flare Nut	0.55
ONS-C106XQ2				90				
ONS-C106XQ3				110				
ONS-C106XQ4				45	110/220V. AC			
ONS-C106XQ5				90				
ONS-C106XQ6				110				
ONS-C106XQ7				45	115/230V. AC			
ONS-C106XQ8				90				
ONS-C106XQ9				110				
ONS-C106XQ10				45	120/240V. AC			
ONS-C106XQ11				90				
ONS-C106XQ12				110				
ONS-C106XL1Q1				45	100/200V. AC	Standard (SPST) without Alarm Contact	1000mm Capil. Tube with 1/4" Flare Nut	0.62
ONS-C106XL1Q2				90				
ONS-C106XL1Q3				110				
ONS-C106XL1Q4				45	110/220V. AC			
ONS-C106XL1Q5				90				
ONS-C106XL1Q6				110				
ONS-C106XL1Q7				45	115/230V. AC			
ONS-C106XL1Q8				90				
ONS-C106XL1Q9				110				
ONS-C106XL1Q10				45	120/240V. AC			
ONS-C106XL1Q11				90				
ONS-C106XL1Q12				110				
ONS-C106XQ25				45	100/200V. AC	With Alarm Contact (SPDT)	1/4" Flare Nut	0.55
ONS-C106XQ26				90				
ONS-C106XQ27				110				
ONS-C106XQ28				45	110/220V. AC			
ONS-C106XQ29				90				
ONS-C106XQ30				110				
ONS-C106XQ31				45	115/230V. AC			
ONS-C106XQ32				90				
ONS-C106XQ33				110				
ONS-C106XQ34				45	120/240V. AC			
ONS-C106XQ35				90				
ONS-C106XQ36				110				
ONS-C106XL1Q25	45	100/200V. AC	With Alarm Contact (SPDT)	1000mm Capil. Tube with 1/4" Flare Nut	0.62			
ONS-C106XL1Q26	90							
ONS-C106XL1Q27	110							
ONS-C106XL1Q28	45	110/220V. AC						
ONS-C106XL1Q29	90							
ONS-C106XL1Q30	110							
ONS-C106XL1Q31	45	115/230V. AC						
ONS-C106XL1Q32	90							
ONS-C106XL1Q33	110							
ONS-C106XL1Q34	45	120/240V. AC						
ONS-C106XL1Q35	90							
ONS-C106XL1Q36	110							


- Max. Working Pressure: 1.5 MPa {15 kgf/cm²}
- Limit of Pressure Diff. $H_p \geq L_p$: 1.5 MPa {15 kgf/cm²}, H_p represents oil pump discharge pressure and L_p crank case pressure.
- Enclosure: IP20
- Drip Proof Models: Available upon request. (Refer to page 52.)

※After the timer operation, please press the reset button later 30 minutes.

ELECTRICAL RATINGS

Rated Current (A)	Rated Voltage (V)	Power Factor (cos ϕ)	125/250V. AC
Non-Inductive Current		1	3.5
Inductive Current	Full Load	0.75	3
	Inrush Current	—	10

CONTACT FUNCTIONS

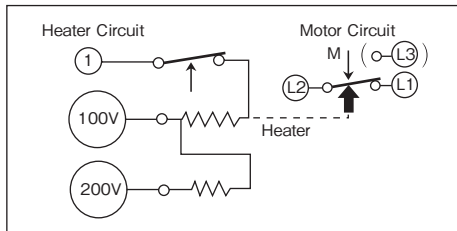


↑ : Operating direction of pressure increase

↑ : Operating direction of timer when energized

M ↓ : Operating direction of manual reset

(L3: Alarm Contact provided with a lead wire approx.)
 $\phi 3.5 \times 100\text{mm}$ with a soldered terminal.

PRESSURE CONNECTIONS





Standard

Refer to page 45, 46.

1	Heater Circuit	Common Terminal
100		100V Power Supply Terminal
200		200V Power Supply Terminal
L1	Motor Circuit	Open on Decrease of Pressure Difference
L2		Main Contact
L3		Alarm Contact

110/220V. AC, 120/240V. AC etc. available

DIMENSIONS

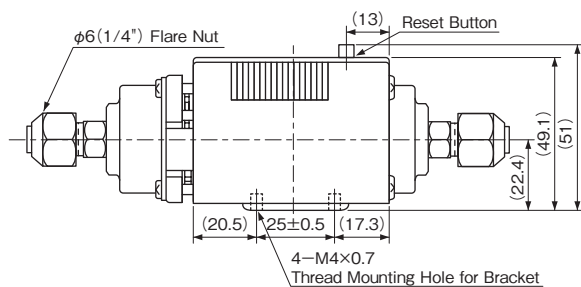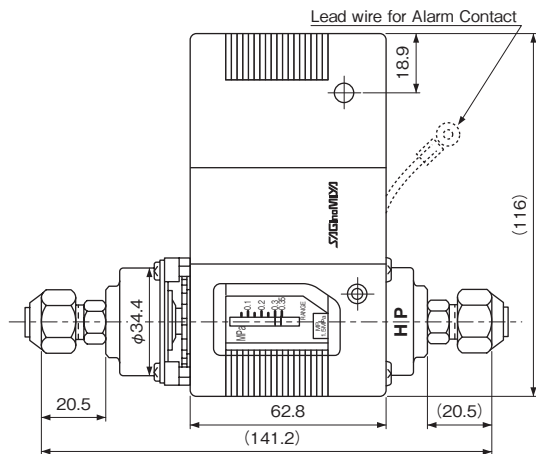

Unit: mm

DIFFERENTIAL PRESSURE CONTROLS

Type WNS & YNS

SAGInoMIYA

GENERAL DESCRIPTION

Type WNS

- Differential pressure is adjustable controller.
- It is suitable for water cutoff detection of cooling water circuit.
- Standard Type : IP20

Type YNS

- Narrow differential pressure (fixed) controller.
- Standard Type : IP20

CE mark applicable (available upon request)
UL recognized (available upon request)

SPECIFICATIONS

- Fluid temperature: -20 to 120°C
- Ambient temperature: -20 to 70°C
- For water, air and fluorinated refrigerant

TYPE NUMBER SELECTION

Type WNS – Adjustable differential type for water, air and fluorinated refrigerant

Unit: MPa {kgf/cm²}

Catalog No.	Range		Differential		Factory Setting		Max. Working Pressure	Limit of Press. Differential (HP > LP)	Wt. (kg)
	Min.	Max.	Min.	Max.	Off	On			
WNS-C102X	0.03 {0.3}	0.2 {2}	0.03 {0.3}	0.15 {1.5}	0.05 {0.5}	0.02 {0.2}	0.5 {5}	0.5 {5}	0.43
WNS-C106X	0.05 {0.5}	0.35 {3.5}	0.05 {0.5}	0.25 {2.5}	0.1 {1.0}	0.05 {0.5}	1.5 {15}	1.5 {15}	

Type YNS – Fixed narrow differential

Unit: MPa {kgf/cm²}


Catalog No.	Range		Differential		Factory Setting		Max. Working Pressure	Limit of Press. Differential (HP > LP)	Wt. (kg)
	Min.	Max.	Fixed		Off	On			
YNS-C102X	0.02 {0.2}	0.2 {2}	0.015 {0.15} approx.		0.05 {0.5}	0.035 {0.35}	0.5 {5}	0.5 {5}	0.43
YNS-C106X	0.025 {0.25}	0.35 {3.5}	0.025 {0.25} approx.		0.15 {1.5}	0.125 {1.25}	1.5 {15}	1.5 {15}	

- HP.....High Side Press. LP.....Low Side Press.
- Enclosure: IP20
- Drip proof models: Available upon request. (Refer to page 52.)
- Please contact us if other range models are required.

ELECTRICAL RATINGS

Rated Voltage (V)		Power Factor (cos ϕ)	125/250V. AC
Rated Current (A)			
Non-Inductive Current		1	12
Inductive Current	Full Load	0.75	
	Inrush Current	—	

PRESSURE CONNECTIONS




Standard

Refer to page 45, 46.

Catalog No.	Unit: mm			
	φ A	B	C	D
WNS-C102X	38.5	50.0	39.0	147.2
WNS-C106X	34.4	47.0	36.0	141.2




CONTACT FUNCTIONS



1	Common Terminal
3	Close on Pressure Increase
5	Close on Pressure Decrease

↑ : Operating direction on press. increase at High Press. Side

DIMENSIONS

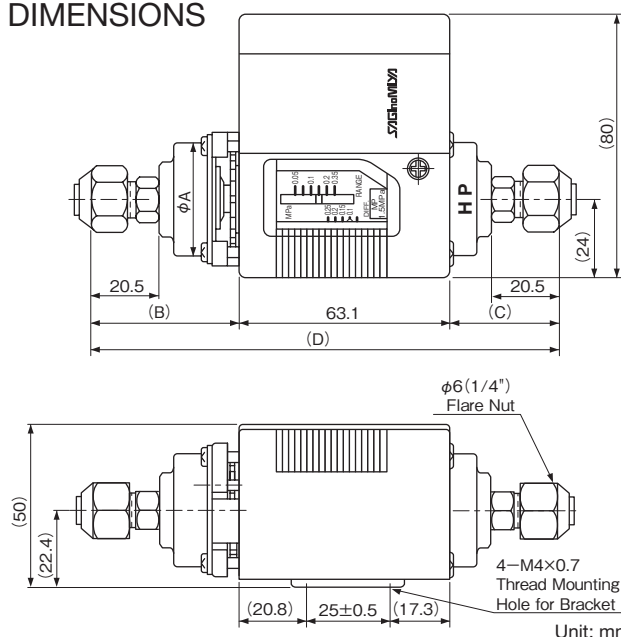

Unit: mm

PRESSURE SENSORS

High Volume OEM Item (Type NSK)

Type NSK & XSK

SAGINO MIYA

GENERAL DESCRIPTION

- High reliability and accuracy
- Double diaphragm structure
- Diffusion silicone chip pressure sensor

SPECIFICATIONS

- Fluid temperature range: -30 to 120°C (Type NSK)
 -20 to 70°C (Type XSK)
- Ambient temperature range: -30 to 100°C (Type NSK-BC, BE)
 -30 to 80°C (Type NSK-BH)
 -20 to 70°C (Type XSK)

CE mark applicable (available upon request)

UL recognized (available upon request)



Type NSK-BC

Type NSK-BE

Type NSK-BH

Type XSK

TYPE NUMBER SELECTION

Unit: MPa {bar}



Catalog No.			Pressure Range	Supply Voltage	Output	* Accuracy	Current Consumption	Load Resistance	Airtight Pressure	Wt. (kg)
NSK-	BC	010I-***	0 to 1 {0 to 10}	5V. DC ± 0.25V	0.5 to 3.5V. DC or 0.5 to 4.5V. DC	±2.5% F.S.	Max. 10mA	Min. 10 kΩ	3.85 {38.5}	0.07
		017I-***	0 to 1.7 {0 to 17}							
		020I-***	0 to 2 {0 to 20}							
		030I-***	0 to 3 {0 to 30}						4.56 {45.6}	
		035I-***	0 to 3.5 {0 to 35}							
		042I-***	0 to 4.15 {0 to 41.5}							
		050I-***	0 to 5 {0 to 50}						5.5 {55}	
	BE	010I-***	0 to 1 {0 to 10}	5V. DC ± 0.25V	0.5 to 3.5V. DC or 0.5 to 4.5V. DC	±2.5% F.S.	Max. 10mA	Min. 10 kΩ	3.85 {38.5}	0.04
		017I-***	0 to 1.7 {0 to 17}							
		020I-***	0 to 2 {0 to 20}							
		030I-***	0 to 3 {0 to 30}						4.56 {45.6}	
		035I-***	0 to 3.5 {0 to 35}							
		042I-***	0 to 4.15 {0 to 41.5}							
		050I-***	0 to 5 {0 to 50}						5.5 {55}	
	BH	010D-***	0 to 1 {0 to 10}	5V. DC ± 0.25V	0.5 to 3.5V. DC or 0.5 to 4.5V. DC	±2.5% F.S.	Max. 10mA	Min. 10 kΩ	3.85 {38.5}	0.06
		017D-***	0 to 1.7 {0 to 17}							
		020D-***	0 to 2 {0 to 20}							
		030D-***	0 to 3 {0 to 30}						4.56 {45.6}	
		035D-***	0 to 3.5 {0 to 35}							
		042D-***	0 to 4.15 {0 to 41.5}							
		050D-***	0 to 5 {0 to 50}						5.5 {55}	
XSK- AC	10I-194	-0.05 to 1 {-0.5 to 10}	10.5 to 28V. DC	4 to 20mA. DC	±3% F.S.	—	Max. 100Ω at 12V. DC	3.85 {38.5}	0.09	
	20I-194	0 to 2 {0 to 20}								
	30I-194	0 to 3 {0 to 30}					Max. 500Ω at 24V. DC	5.5 {55}		
	35I-194	0 to 3.5 {0 to 35}								
	50I-194	0 to 5 {0 to 50}								

* Included non lineality hysteresis, and temperature drift

* Accuracy of 2.5% or less is available upon request.


• Enclosure: IP66 (Type NSK-BH)

WIRING

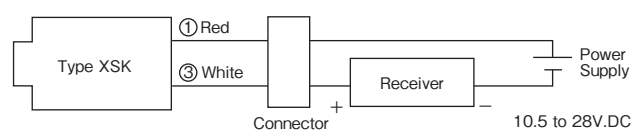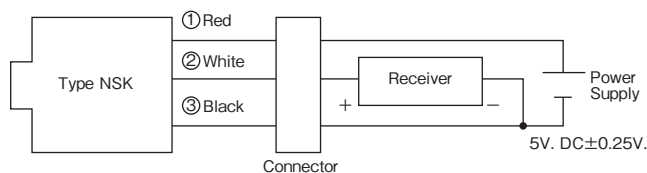


DIMENSIONS


Type NSK-BC (Molex connector)

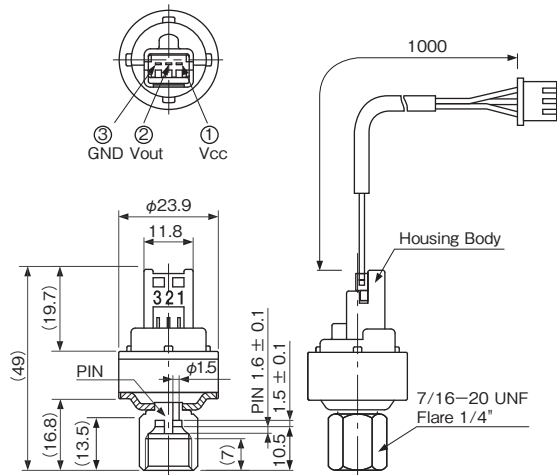


Type NSK-BE (Packard connector)

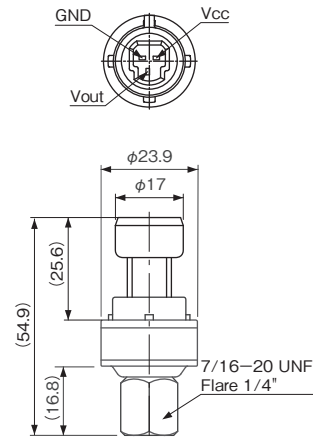

Type NSK-BH (Lead wire direct Connector)

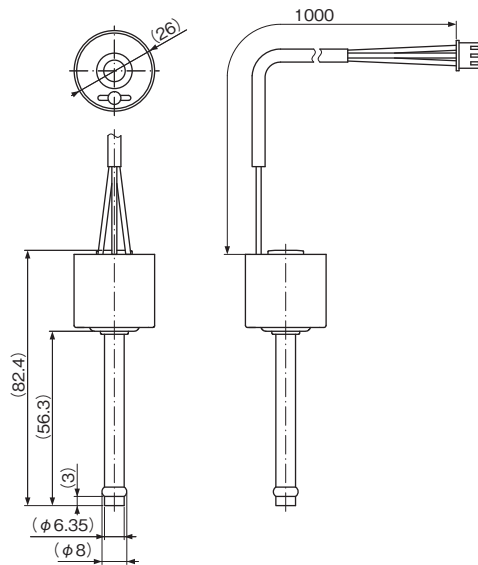

Type XSK (Molex connector)

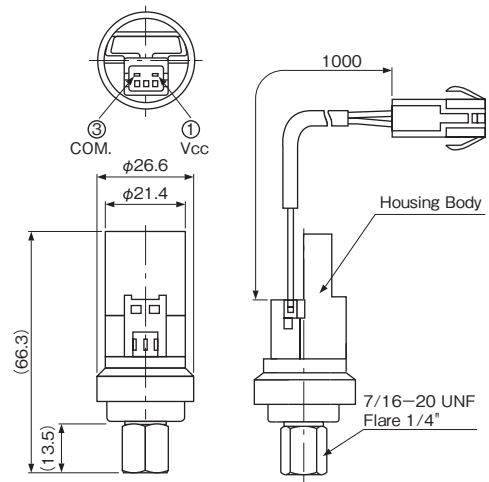

Unit: mm

ACCESSORY


- Lead wire with connector is supplied as standard accessory except for NSK-BE type.

OPTIONAL PARTS

Bracket


- NSK

Type No. NSK-PP02 (for NSK-BC, BE)

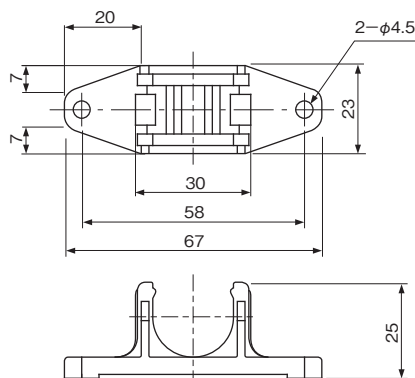

- XSK





Type No. YSK-PP02

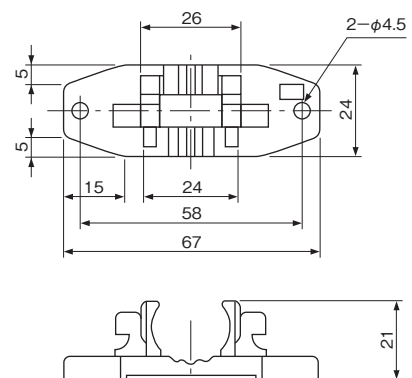

Unit: mm

PRESSURE CONNECTIONS

- Connection Material
Stainless steel pressure connection is available upon request. (R only)
- Connection Style
Standard connection style is 7/16–20UNF Female Flare with schrader depressor.
The following connection styles are available upon request.

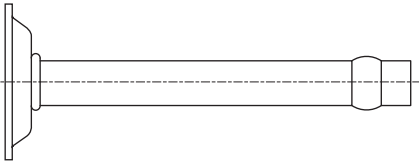7/16–20UNF Female Flare 1/4" with schrader depressor	7/16–20UNF Male Flare 1/4"										
											
R	1/4" Copper Solder (Type NSK–BH)										
<table><tr><th>A</th><th>Type</th></tr><tr><td>1/8"</td><td>NSK</td></tr><tr><td></td><td>XSK</td></tr><tr><td>1/4"</td><td>XSK</td></tr><tr><td>3/8"</td><td>XSK</td></tr></table>	A	Type	1/8"	NSK		XSK	1/4"	XSK	3/8"	XSK	
A	Type										
1/8"	NSK										
	XSK										
1/4"	XSK										
3/8"	XSK										

TEMPERATURE & HUMIDITY CONTROLS

TEMPERATURE CONTROLS	29–30
Type LWS, FWS, RWS & EWS	
TEMPERATURE CONTROLS	31–32
Type TNS, CNS & INS	
TEMPERATURE CONTROLS	33
Type ALS & BLS	
PROPORTIONAL TEMPERATURE CONTROLS	34
Type PWS	
ROOM THERMOSTATS	35–36
Type ARS	
ROOM THERMOSTATS	37
Type WRS	
ROOM HUMIDISTATS	38
Type AHS	
DIGITAL THERMOSTATS & DIGITAL HUMIDISTATS ..	39–42
Type ALE & BLE	

TEMPERATURE CONTROLS

REMOTE / DIRECT SENSING

Type LWS, FWS, RWS & EWS

SAGINOMIYA

GENERAL DESCRIPTION

- Most suitable model can be selected from the variations of wide temperature range with either adjustable or fixed differential. Narrow differential is further advantageous.
- Sensing elements are air sensed and liquid sensed type depending on control media. Also, sensing element can be selected from remote or direct type depending on application.
- Single pole double throw contacts allows use for either heating or cooling application, with large contact rating as well.
- Adjusting mechanism is driver adjusting type as standard on delivery, but a knob assembly and a concealed plate are also supplied as standard accessories.

UL listed (available upon request)



Type LWS



Type EWS

TYPE NUMBER SELECTION (SPECIFICATIONS)

Type LWS – Set high type with standard remote sensing element

Unit: °C

Catalog No.						Temp. Adjusting Range		Differential		Bulb Size (mm)	Ambient Temp.	Limit of Bulb Temp.	Wt. (kg)
Type	Designation												
	Contact	Model	Differential	Rating	Capillary Length	Min.	Max.	Min.	Max.				
LWS-	C1	030	A (Variable)	G 									

Type FWS – Air Sensed type with standard remote sensing element

Unit: °C

Catalog No.						Temp. Adjusting Range		Differential		Bulb Size (mm)	Ambient Temp.	Limit of Bulb Temp.	Wt. (kg)	
Type	Designation													
	Contact	Model	Differential	Rating	Capillary Length		Min.	Max.	Min.	Max.				
FWS-	C1	030	A (Variable)	G R	Standard L1 (L = 1m)		-35	30	2	7	Max. ϕ 37 × 58	-20 to 70	60	0.52
		060					-5	60					90	
		090					25	90					120	
		120					40	120					150	
		030	F (Fixed)		Option L2 (L = 2m) L3 (L = 3m) L5 (L = 5m)	-35	30	2 (Fixed)		60				
		060				-5	60			90				
		090				25	90			120				
		120				40	120			150				
		030				-35	30	2.5 (Fixed)		60				
		060				-5	60			90				
		090				25	90			120				
		120				40	120			150				

Type RWS – with coiled capillary sensing element

Unit: °C

Catalog No.					Temp. Adjusting Range		Differential		Sensing Element (mm)	Ambient Temp.	Limit of Tube Temp.	Wt. (kg)
Type	Designation											
	Contact	Model	Differential	Rating	Min.	Max.	Min.	Max.				
RWS-	C1	060	A (Variable)	G R	—5	60	2	7	Coiled Tube Max. ϕ 42 × 40	— 20 to 60	60	0.43
		034			—10	35	1.4	5		— 20 to 70	70	
		054			10	55				— 20 to 70	70	
		060	F (Fixed)		—5	60	2 (Fixed)			— 20 to 70	70	
		034			—10	35	1.4(Fixed)			— 20 to 70	70	
		054			10	55				— 20 to 60	60	

Type EWS – with direct immersion sensing element


Unit: °C

Catalog No.					Temp. Adjusting Range		Differential		Sensing Element (mm)	Ambient Temp.	Limit of Tube Temp.	Wt. (kg)
Type	Designation											
	Contact	Model	Differential	Rating	Min.	Max.	Min.	Max.				
EWS-	C1	080	A (Variable)	G R	0	80	2.5	8	ϕ 10.8×70	-20 to 70	110	0.51
		120			40	120					150	
		160			95	160					185	
		080	F (Fixed)		0	80	2.5 (Fixed)	110				
		120			40	120		150				
		160			95	160		185				

ELECTRICAL RATINGS

Electrical Rating Code	Rated Voltage (V) Rated Current (A)		Power Factor (cos ϕ)	125V. AC	250V. AC
G	Non-Inductive Current		1.0	0.5 to 16	0.5 to 8
	Inductive Current	Full Load	0.75		
			Inrush Current	—	96
R	Non-Inductive Current		1.0	0.05 to 8.5	0.05 to 4.5
	Inductive Current	Full Load	0.75		
			Inrush Current	—	51

CONTACT STYLE



Models "set high"


The dial indicates the high switch point (C – L close, C – H open).

The low switch point (C – L open, C – H close) is obtained by deducting the differential from the high switch point.


Arrow mark indicates a direction of switch action on temperature increase.

DIMENSIONS


Type LWS

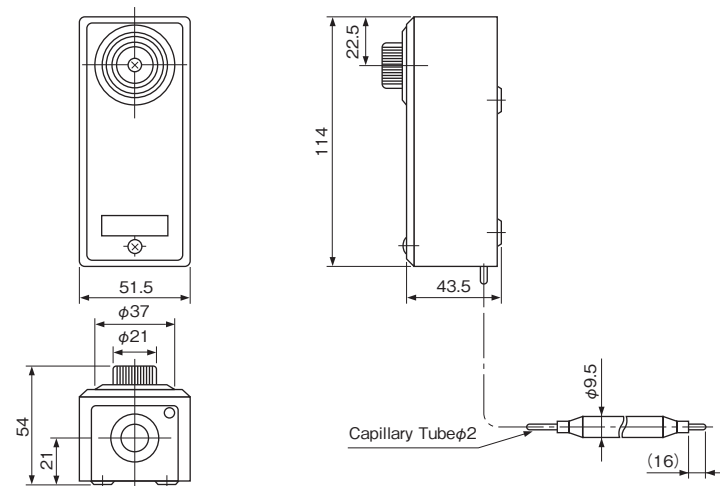


Type RWS

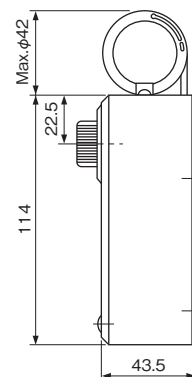

Type FWS

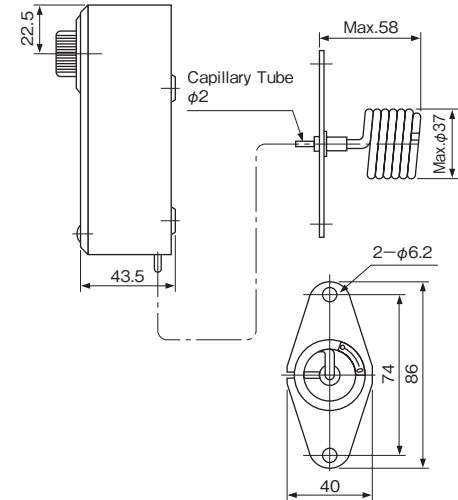

Type EWS

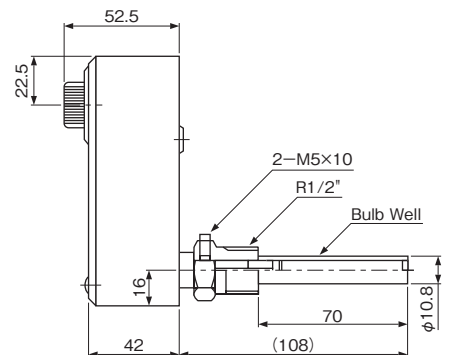

Unit: mm

ACCESSORY : Available upon request. (Refer to page 47.)

TEMPERATURE CONTROLS

GENERAL PURPOSE


Type TNS, CNS & INS

SAGInoMIYA

GENERAL DESCRIPTION

- Type TNS is provided with a differential adjustable mechanism.
- Type CNS is provided with a fixed differential. Also manual reset models are available.
- Type INS provides automatic High-cut temperature control with manual reset.
- Narrow and adjustable temperature differential for more accurate control model Type BNS is available.
- Available drip proof enclosure for marine application or explosion proof enclosure for special application.
- A mounting bracket is supplied as standard.
- With SPDT contact mechanism.
- IP44 with upper lid (option).

CE mark applicable (available upon request)
UL recognized (available upon request)

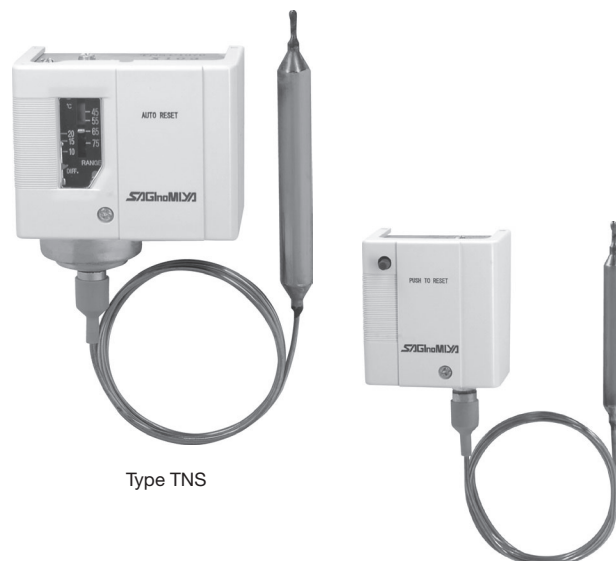

Type TNS

Type INS

TYPE NUMBER SELECTION (SPECIFICATIONS)

Type TNS – Automatic Reset Type

Unit: °C

Catalog No.	Range		Differential		Factory Setting		Limit Temp.	Bulb Size (mm)		Usage Condition	Wt. (kg)
	Min.	Max.	Min.	Max.	Off (On)	On (Off)		φA	B		
TNS-C100X	−25	0	Bottom 4.5 Top 3	15	−18	−15	70	6	80	Ts > Tb	0.34
TNS-C114X	−15	15			−3	0					
TNS-C134X	0	35			17	20					
TNS-C1070X	45	75	4	20	61	65	115	12.7	100	Ts < Tb	0.37
TNS-C1100X	65	105	5		70	75	140				
TNS-C1120X	95	125			110	115	160				
TNS-C1150X	115	150			140	145	180				
TNS-C1010XC	−45	10	4		−4	0	45			Ts ≧ Tb	
TNS-C1034XC	−20	35			16	20	70				
TNS-C1070XC	15	70			36	40	115				
TNS-C114XQ009	−30	15	Bottom 5 Top 2	15	−8	−5	120	Capillary Tube Type		Ts > Tb	
TNS-C114XQ010					Capillary Coil Type						
TNS-C134XQ009	−5	35			12	15		Capillary Tube Type			
TNS-C134XQ010					Capillary Coil Type						

- Bottom...Differential when the switch is set at minimum of range.
- Top...Differential when the switch is set at maximum of range.
- Ts...Ambient temp. of switch body. • Tb...Sensing bulb temp.
- Drip proof models: Available upon request. (Refer to page 53.)
- Enclosure: IP20

Type CNS – Automatic Reset Type

Unit: °C

Catalog No.	Range		Differential	Factory Setting		Limit Temp.	Bulb Size (mm)		Usage Condition	Wt. (kg)
	Min.	Max.		Off	On		φ A	B		
CNS-C115X	-35	-15	Bottom 4 Top 3(fixed)	-28	-25	70	6	80	Ts > Tb	0.34
CNS-C100X	-25	0	approx. 3 (fixed)	-18	-15					
CNS-C114X	-15	15	Bottom 4 Top 3(fixed)	-3	0					
CNS-C134X	0	35		17	20					

- Bottom...Differential when the switch is set at minimum of range.
- Top...Differential when the switch is set at maximum of range.
- Ts...Ambient temp. of switch body. • Tb...Sensing bulb temp.
- Enclosure: IP20

TYPE CNS – Manual Reset Type

Unit: °C

Catalog No.	Range		Manual Reset	* Factory Setting		Limit Temp.	Bulb Size (mm)		Usage Condition	Wt. (kg)
	Min.	Max.		Off	On		φ A	B		
CNS-C115XM2	-35	-15	Automatic operation on temperature decrease and manual reset on temperature decrease	-28	Manual Reset	70	6	80	$T_s > T_B$	0.34
CNS-C100XM2	-25	0		-18						
CNS-C114XM2	-15	15		-3						
CNS-C134XM2	0	35		17						

* Based on the 1-3 terminal connection.

- T_s ...Ambient temp. of switch body. • T_B ...Sensing bulb temp.
- Enclosure: IP20

TYPE INS – Manual Reset Type

Unit: °C

Catalog No.	Range		Manual Reset	* Factory Setting		Limit Temp.	Bulb Size (mm)		Usage Condition	Wt. (kg)
	Min.	Max.		Off	On		φ A	B		
INS-C1070XM1	25	75	Automatic operation on temperature increase and manual reset on temperature decrease	Manual Reset	65	115	9.5	80	$T_s < T_B$	0.26
INS-C1120XM1	70	120			115	160				
INS-C1150XM1	115	150			140	180				


* Based on the 1-3 terminal connection.

- T_s ...Ambient temp. of switch body. • T_B ...Sensing bulb temp.
- Enclosure: IP20


ELECTRICAL RATINGS

Rated Voltage (V)		Power Factor (cos ϕ)	125/250 V. AC
Rated Current (A)			
Non-Inductive Current		1	12
Inductive Current	Full Load	0.75	
	Inrush Current	—	


CONTACT FUNCTIONS



TNS & CNS Automatic Reset Type



CNS Manual Reset Type




INS Manual Reset Type

1	Common Terminal
3	Close on Temperature Increase
5	Close on Temperature Decrease


↑ : Operating direction on temp. increase at High temp. side
M1 ↓ , M2 ↑ : Operating direction on manual reset

SENSING ELEMENT STYLE


Sensing Bulb Type

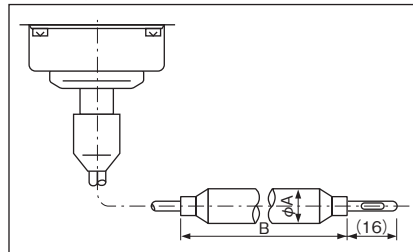

Capillary Tube Type

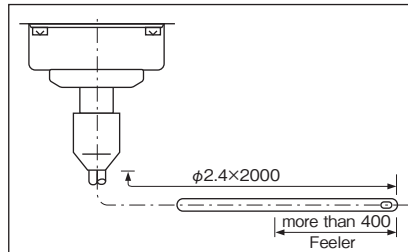


Capillary Coil Type

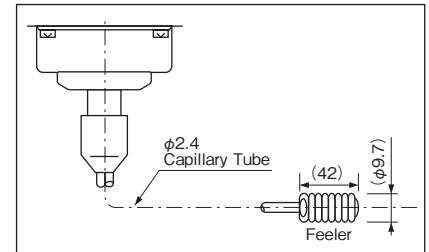


Standard: 1000mm Capillary tube. Other capillary length are available upon request.

DIMENSIONS

Type TNS, CNS

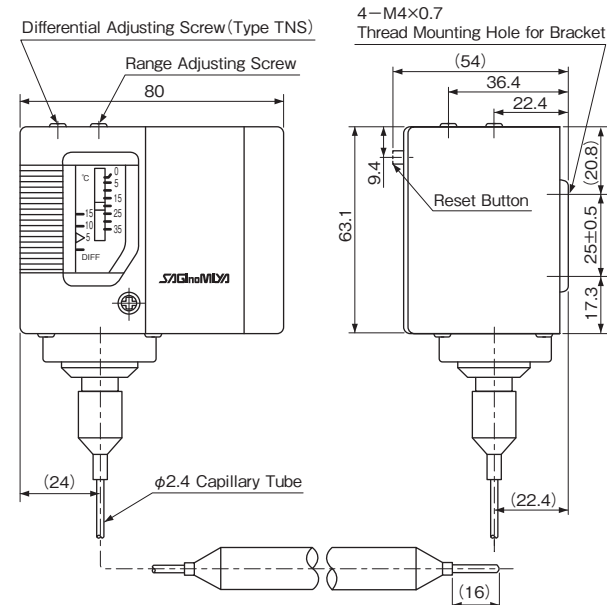

Type INS

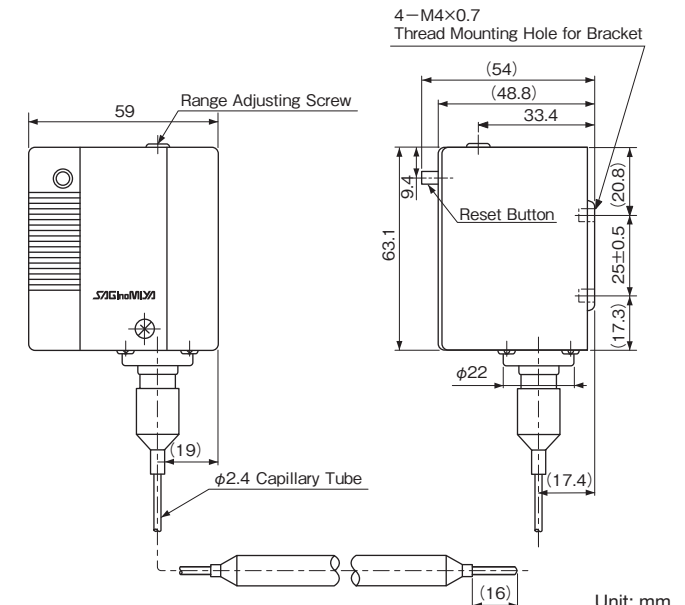

Unit: mm

TEMPERATURE CONTROLS

Type ALS & BLS

SAGInoMIYA

GENERAL DESCRIPTION

- Wide temp. range and narrow fixed differential. One control can meet most of your refrigeration or heating applications.
- Easy and accurate setting with large external knob.
- Tin Plating of bulb and capillary for food.
- SUS of main body for anti-corrosion and high durability, ABS resin of cover for anti-static.
- With SPDT contact mechanism.
- Insert holder is available upon request.
- Can mount horizontal and vertical position.



Type ALS



Type BLS

TYPE NUMBER SELECTION (SPECIFICATIONS)

Unit: °C


Catalog No.	Range		Differential	Limit of Bulb Temp.	Bulb Size (mm)	Capillary Tube Length (mm)	Wt. (kg)
	Min.	Max.					
BLS-C1020L1	−20	20	Approx. 2.0 (Fixed)	60	ϕ 10×100	ϕ 2.4×1000	0.3
ALS-C1011L1	−60	−10	Approx. 2.5 (Fixed)				
ALS-C1020L1	−40	20					
ALS-C1050L1	−10	50					
ALS-C1090L1	40	90					

• When order model with earth terminal, add a suffix "x" to Catalog No.

ELECTRICAL RATINGS

Rated Voltage (V)		Power Factor (cos ϕ)	125V.AC	250V.AC	450V.AC	24V.DC	125V.DC
Rated Current (A)							
Non-Inductive Current		1	10	5	2	5	0.5
Inductive Current	Full Load	0.75	8.5	4.5	1	3	0.2
	Inrush Current	—	50	37	10	10	5


CONTACT FUNCTIONS



Arrow Mark indicates direction of operation on temperature increase.

C	Common Terminal
L	Close on Temperature Increase
H	Close on Temperature Decrease


DIMENSIONS

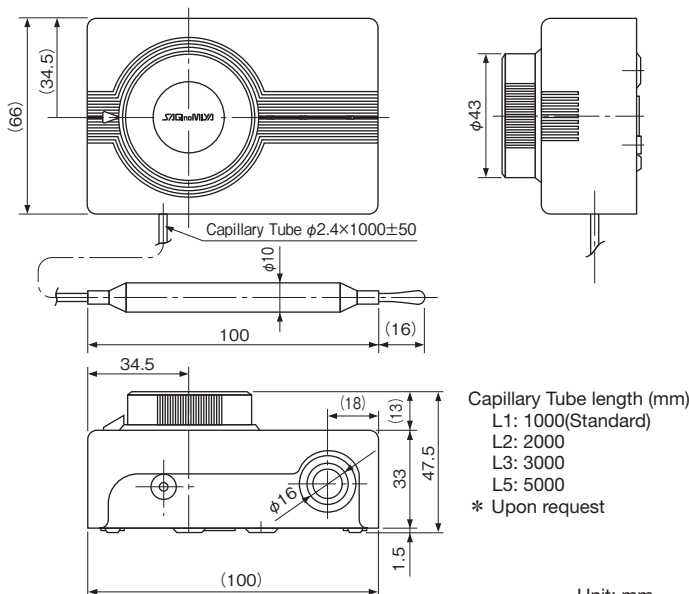

Unit: mm

ACCESSORY

Mounting Bracket

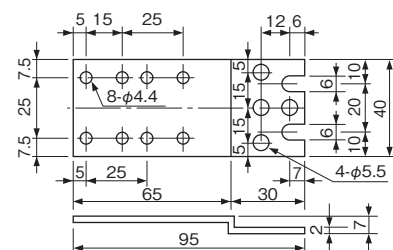

Part No.	ALS-AE02
----------	----------

PROPORTIONAL TEMPERATURE CONTROLS

Type PWS

SAGINO MIYA

GENERAL DESCRIPTION

- Designed for accurate control for air and liquid temperature in duct and boiler.
- Incorporates a potentiometer which produces a variable voltage signal to actuate AWK/EGK type damper motor or MJV/WGK type motor valve.
- Proportional band (throttling range) is adjustable.
- Electrical rating: 24V. AC, 50mA.
Potentiometer resistance 0 to 135Ω.




TYPE NUMBER SELECTION (SPECIFICATIONS)

Unit: °C


Catalog No.	Construction	Adjustable Temp. Range	Proportional Band		Usage Condition	Max. Ambient Temp.		Wt. (kg)
			Min.	Max.		At Switch Body	At Sensing Bulb	
PWS-7034	With One Potentiometer	−10 to 35	2.5	14	$T_s \cong T_b$	−20 to 70	60	0.52
PWS-7054		10 to 55					80	
PWS-7074		30 to 75					100	
PWS-7094		50 to 95					120	
PWS-7120		40 to 120	4	20			150	
PWS-7060		−5 to 60	35	15			90	0.68

INTERNAL WIRINGS (POTENTIOMETER ARRANGEMENT)



Resistance variation at potentiometer with increase of temperature:
Increase between R and B
Decrease between R and V
R...Common terminal

DIMENSIONS

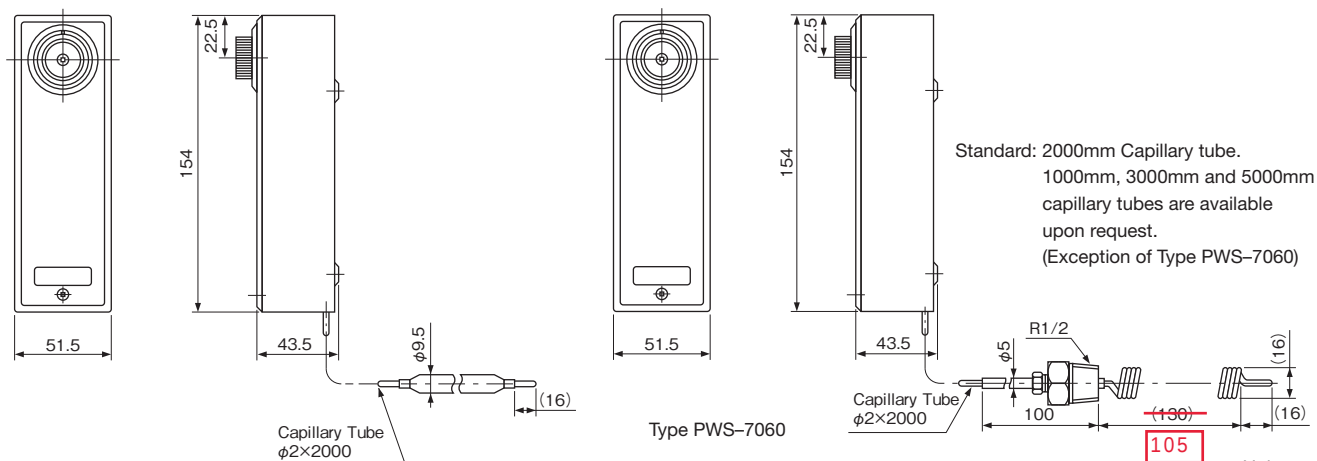

ROOM THERMOSTATS

Type ARS

SAGInoMIYA

GENERAL DESCRIPTION

- High quality room thermostat for heating or cooling.
- Used for low or line voltage.
- Easy to adjust with dial knob.
- Dial stopper screw prevents unauthorized change of setting.



SPECIFICATIONS

- Ambient temperature: —20 to 50°C (Double-digit type)
—10 to 50°C (Propotional type)

TYPE NUMBER SELECTION

Double-digit type

Double-digit type										Unit: °C
Catalog No.				Range		Differential	Step Differential	Factory Setting		Wt. (kg)
Type	Contact Type	Temp.	Special Application	Min.	Max.			Off (On)	On (Off)	
ARS-	C1	20	— (Standard Type)	0	20	Approx. 1.5	—	(8.5)	10	0.17
		30		10	30			(18.5)	20	
		40		20	40			(23.5)	25	
		20	S	0	20			(8.5)	10	
		30		10	30			(18.5)	20	
		40		20	40			(23.5)	25	
	S6	30	— (Standard Type)	10	30		Approx. 2	Heat Side (18.5) Low Side (16.5)	20 18	0.22

Unit: °C

Propotional type

Catalog No.				Range		Differential	Factory Setting	Wt. (kg)
Type	Contact Type	Temp.	Special Application	Min.	Max.			
ARS-	P1	30	— (Standard Type)	10	30	Approx. 2	25 Center value of Proportional band	0.17
			S					

Unit: °C


ELECTRICAL RATINGS

Catalog No.			ARS-C1			ARS-S6	
Rated Voltage (V) Rated Current (A)		Power Factor (cos ϕ)	AC		DC	AC	
			125	250	24	125	250
Non-Inductive Current		1.0	6	3	2	4	2
Inductive Current	Full Load	0.75	6	3	1	4	2
	Inrush Current	—	24	12	10	16	8

Minimum contact capacity: 50mA

Catalog No.		ARS-P1
Rated Current (A)	Rated Voltage (V)	AC
		24
Allowable current value		50mA
Resistance of the potentiometer		135 Ω


CONTACT FUNCTIONS

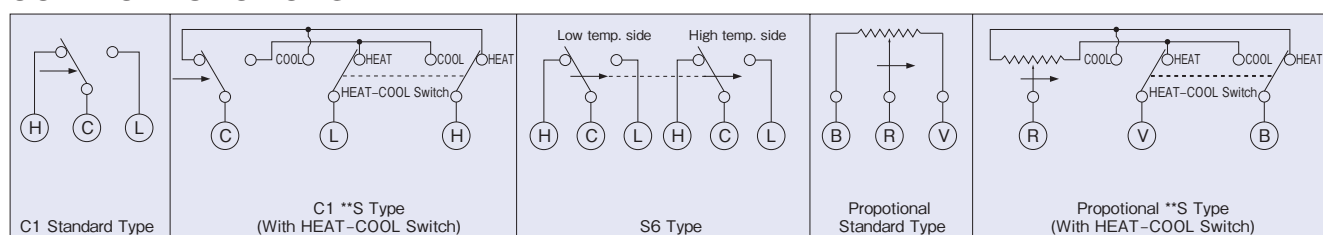

Arrow indicates temp. rise.


APPLICATION SAMPLES

-C1




Arrow indicates temp. rise.

-C1**S




DIMENSIONS

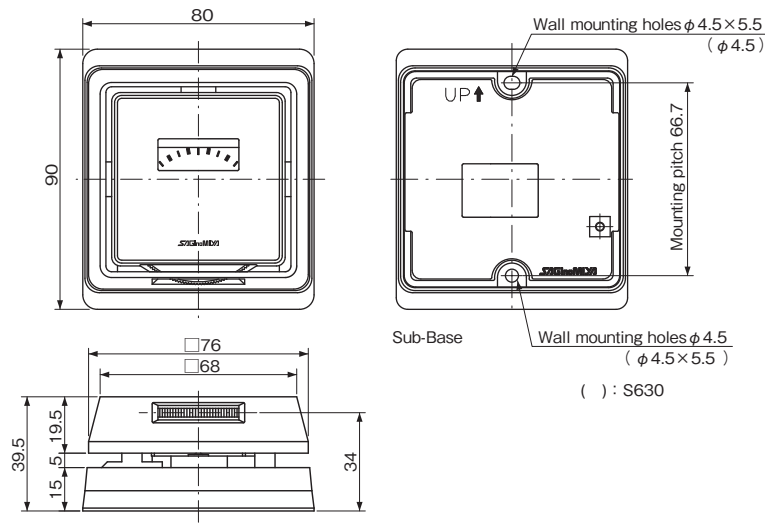

Unit: mm

OPTIONAL PARTS

Mounting pitch 83.5mm plate (ARS-AE01, ARS-AE02)

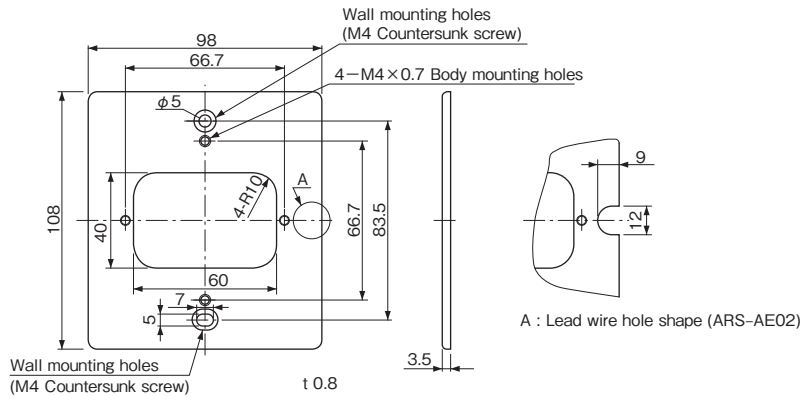

Unit: mm

Parts No.	Lead wire hole
ARS-AE01	Not Exist
ARS-AE02	Exist

ROOM THERMOSTATS

Type WRS

SAGInoMIYA

GENERAL DESCRIPTION

- For fan coil units and air conditioners.
- Used for low or line voltage.
- Various models available with Fan Selector switch and/or Heat-Off-Cool change over switching.
- Using a diaphragm element, it assures high reliability and accurate control.
- Ambient temperature: -20 to 50°C



TYPE NUMBER SELECTION (SPECIFICATIONS)

Unit: $^{\circ}\text{C}$

Catalog No.			Sub-Base Function		Range		Differential	Wt. (kg)
Type	Contact & Temp. Range	Special Application	Change over Switch	Fan Switch	Min.	Max.		
WRS-	C130	X1	ON-OFF, HEAT-COOL	HIGH-MED-LOW	10	30	Approx. 1.5 (Fixed)	0.25
		X2	ON-OFF					
		X7	ON-OFF, HEAT-COOL					

- Change over switch of HEAT-COOL on WRS-C130X1 is only for changing switch mechanism of room thermostat itself between HIGHCUT (HEATING) and LOWCUT (COOLING) according to system requirement.
- Please refer to the application sample and wiring diagram.

ELECTRICAL RATINGS

Rated Voltage (V)		Power Factor (cos ϕ)	125V. AC	250V. AC
Rated Current (A)				
Non-Inductive Current		1	6	3
Inductive Current	Full Load	0.75		
	Inrush Current	—	24	12


Minimum contact capacity: 50mA

CONTACT FUNCTIONS

Type	WRS-C130X1	WRS-C130X2	WRS-C130X7
Internal Wiring			

Arrow indicates temp. rise.

DIMENSIONS

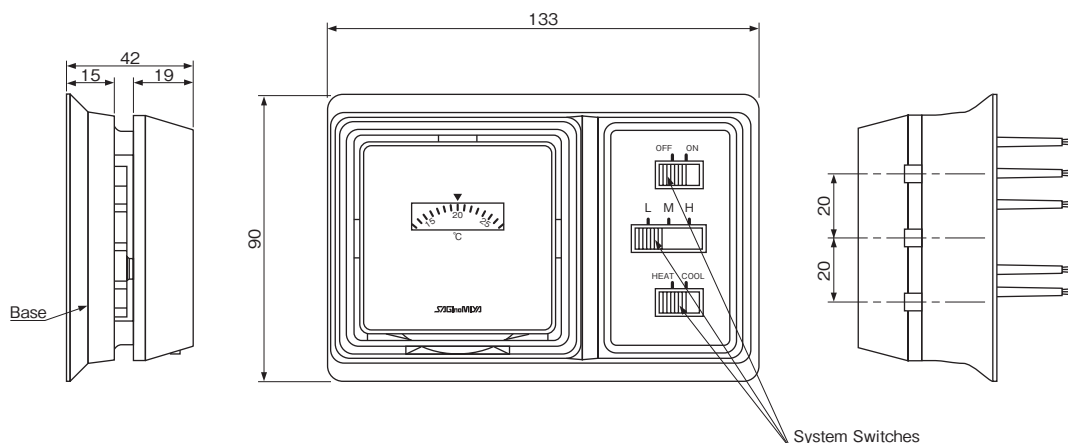

Unit: mm

ROOM HUMIDISTATS

Type AHS

SAGINO MIYA

GENERAL DESCRIPTION

- Accurate humidity control assured by nylon ribbon.
- Used for low or line voltage.
- Easy adjustment by dial knob.
- Dial stopper screw prevents unauthorized change of setting.



SPECIFICATIONS

Unit: % RH


Catalog No.	Contact	Range		Differential	Ambient Temp. on Use (°C)	Wt. (kg)
		Min	Max.			
AHS-C1090	SPDT	30	90	Approx. 5	10 to 40	0.17

ELECTRICAL RATINGS


Rated Voltage (V)		Power Factor (cos φ)	125V. AC	250V. AC	24V. DC
Rated Current (A)					
Non-Inductive Current		1.0	4.5	2	1
Inductive Current	Full Load	0.75	3	1.5	0.4
	Inrush Current	—	12	6	2

Minimum Contact Capacity: 50mA


CONTACT FUNCTIONS



DIMENSIONS

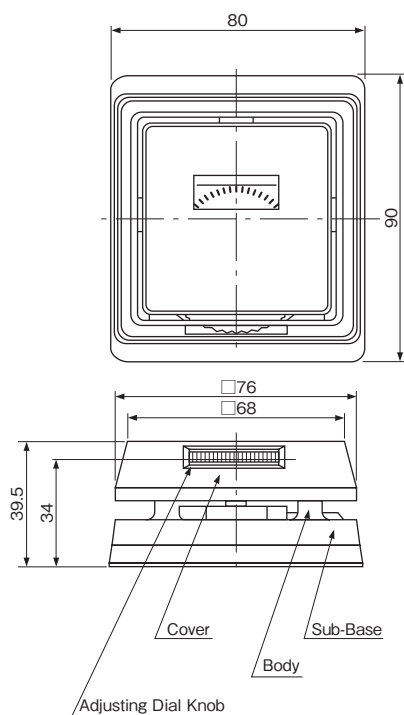

Unit: mm

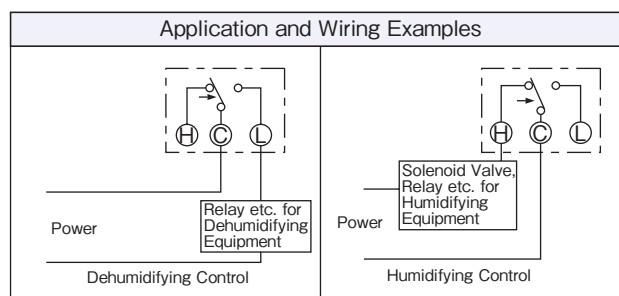

Arrow mark indicates humidity increase.

DIGITAL THERMOSTATS & DIGITAL HUMIDISTATS

Type ALE & BLE

SAGInoMIYA

GENERAL DESCRIPTION

- LCD with high brightness backlight
- Power supply voltage: 85 to 264V.AC 50/60Hz
- Forced ON/OFF
- Relay output: 250V. AC , 10A ($\cos \phi = 1$)
6A ($\cos \phi = 0.7$)
3A ($\cos \phi = 0.4$)
- Ambient temperature: Controller ... - 10 to 50°C
- Type ALE:
 - Available 0.1°C pitch display (select 0.1°C / 0.5°C / 1°C)
 - Max.4 ON/OFF points during 24 hours model available.
 - MODBUS communication
- Type BLE:
 - Setting in each 1%RH is possible.
 - Ambient temperature: Humidity sensor 0 to 50°C



Type ALE



Type BLE

TYPE NUMBER SELECTION (SPECIFICATIONS)

Type ALE – Digital Thermostats

Unit: °C

Catalog No.	Temp. Set Range	Differential	Temp. Indication	Function	Sensor Part No. (Standard)	Wt. (kg)
ALE-SD11-011	-50 to 30	Min. 0.5	-55 to 40	Standard(1 Step)	TEK-83H609 (with 2m lead)	0.2
ALE-SD12-011				2 Step		
ALE-SD13-011				1 Step + Hi/Lo limit with time delay		
ALE-SD14-011				1 Step + Programmable		
ALE-SD15-011				2 Step + Programmable		
ALE-SD21-011	0 to 100		0 to 110	Standard(1 Step)	TEK-83H601 (with 2m lead)	
ALE-SD22-011				2 Step		
ALE-SD23-011				1 Step + Hi/Lo limit with time delay		
ALE-SD24-011				1 Step + Programmable		
ALE-SD25-011				2 Step + Programmable		

- Temperature sensor type TEK-83H609 or TEK-83H601 and sensor holder are supplied as standard accessories.
- Enclosure IP44(Front of products)

Type BLE – Digital humidistats

Unit: %RH


Catalog No.	Humidity Set Range	Differential	Humidity Indication	Calibration	Function	Sensor Part No. (Standard)	Wt. (kg)
BLE-SD11-011	30 to 90	Min. 3	20 to 99	±10	1 Step	HEK-11R001	0.3
BLE-SD12-011					2 Step		

- Humidity sensor type HEK-11R001 is supplied as standard accessory.
- Enclosure IP44(Front of products)

OPERATION


Type ALE – Digital thermostats

Standard (1 Step) model

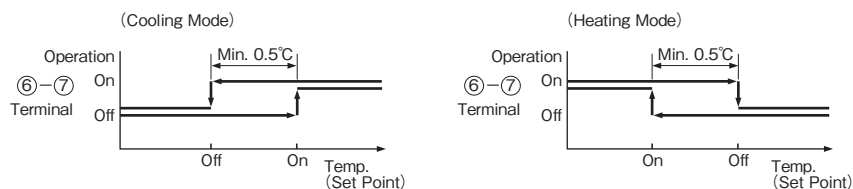


- Free to set On/Off set point independently within the range.
- When Off set point is changed, On set point automatically shifts. (Diff. remains same)
- When On set point is changed, Off set point remains unchanged. (Diff. changes)

2 Step model

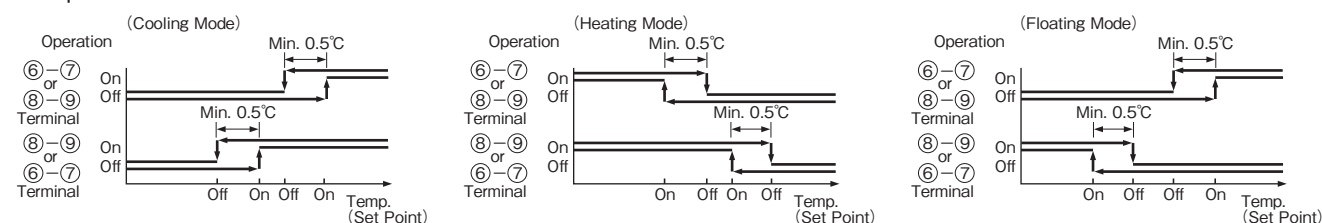


1 Step + Hi/Lo limit with time delay model

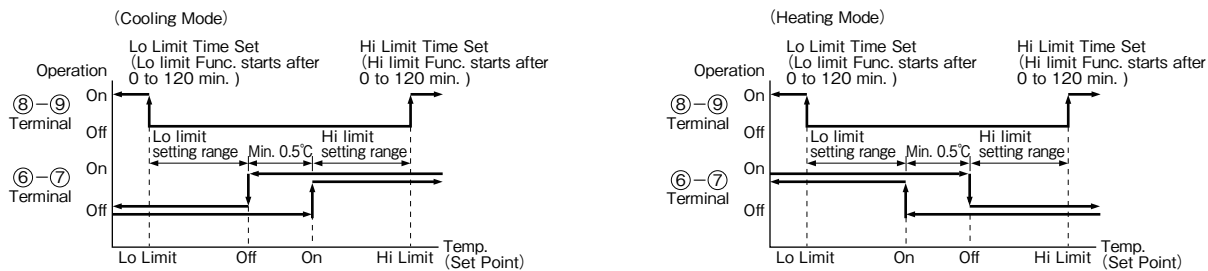

- Hi/Lo limit output is reset manually (Push reset: Push **ENT** Key in 2 sec or power off)
- Delay Timer can be set in the time range from 0 to 120 min respectively.

1 Step + Programmable model

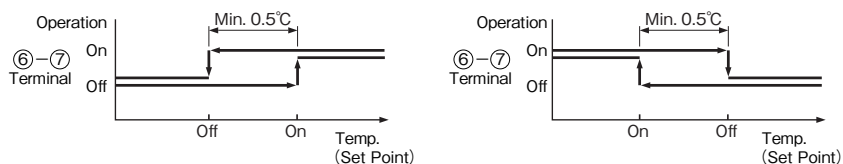

- Free to set On/Off set point independently within the range.
- When Off set point is changed, On set point automatically shifts. (Diff. remains same)
- When On set point is changed, Off set point remains unchanged. (Diff. changes)

Programmable function

Max. 4 ON/OFF points during 24 hours model available.


- Change the set temperature (ON / OFF) at the specified time.
- Stop the control at the specified time.

[Program example 1]

Change the set temperature four times a day at the specified time.

Item1:6:00 OFF 6°C / ON 9°C
 Item2:9:00 OFF 5°C / ON 7°C
 Item3:18:00 OFF 6°C / ON 10°C
 Item4:21:00 OFF 8°C / ON 12°C

This program performs the following operations.

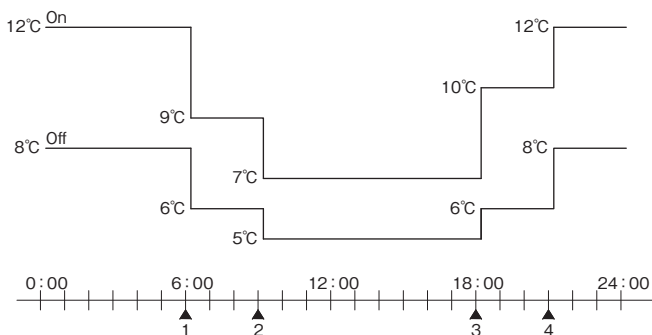


[Program example 2]

Stop control in the night (20:00 to 5:00)

Item1:5:00 OFF 6°C / ON 9°C
 Item2:20:00 OFF 5°C / ON 7°C


This program performs the following operations.

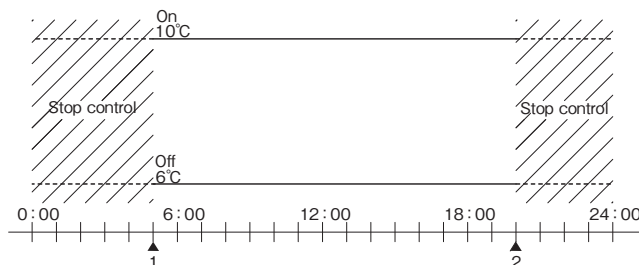

※This model can combine the settings of program example 1 and 2. In this case also a combination of up to 4 points within 24 hours.


Type BLE – Digital humidistats

Standard (1 Step) model

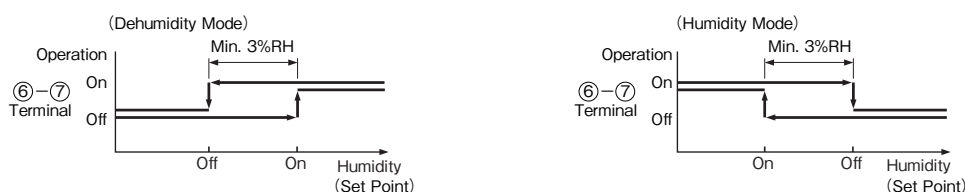


- Free to set On/Off set point independently within the range.
- When Off set point is changed, On set point automatically shifts. (Diff. remains same)
- When On set point is changed, Off set point remains unchanged. (Diff. changes)

2 Step model

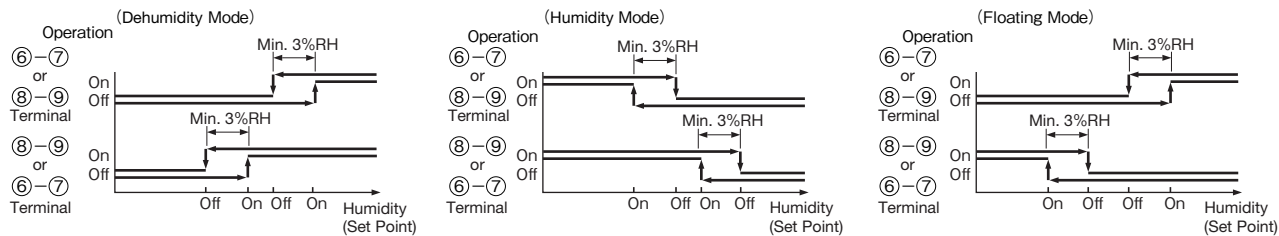


WIRING DIAGRAM

Type ALE

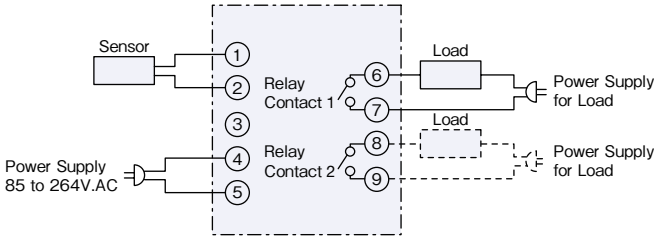

Type BLE

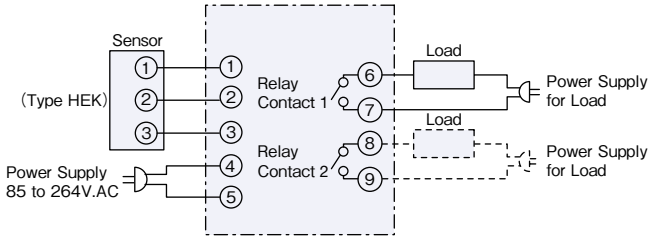

⑥-⑦:(Control output) :Standard (1 Step) model, 2 Step model,
1 Step model + Hi/Lo limit with time delay model,
and 1 Step model + Programmable model

⑧-⑨:(Control output) :2 Step model
(Alarm output) :1 Step model + Hi/Lo limit with time delay model

⑥-⑦:(Control output):Standard (1 Step) model and 2 Step model

⑧-⑨:(Control output):2 Step model

ACCESSORIES

Sensor Part No.	Applicable Model	Dimension	Remarks
TEK-83H609 (Temperature)	ALE-SD11-011 ALE-SD12-011 ALE-SD13-011 ALE-SD14-011 ALE-SD15-011		- Ambient temp. on usage: — 55 to 80°C - When the sensor is in use under the condition of dew, water dripping or outdoor, the sensor should be vertically installed with lead wire outlet downward. - Sensor holder is supplied as standard.
TEK-83H601 (Temperature)	ALE-SD21-011 ALE-SD22-011 ALE-SD23-011 ALE-SD24-011 ALE-SD25-011		- Ambient temp. on usage: — 40 to 110°C - When the sensor is in use under the condition of dew, water dripping or outdoor, the sensor should be vertically installed with lead wire outlet downward. - Sensor holder is supplied as standard.
HEK-11R001 (Humidity)	BLE-SD11-011 BLE-SD12-011		- Designed to accord room interior. - Designed to be installed where certain air flow runs and the room humidity is represented. - Depending on load or other conditions, humidity control may become difficult.

Following sensors are available as option. (Ambient temperature sensors are available upon request.)

Direct immersion sensor with nipple TEK-83N

Wall mounting sensor TEK-83R

Surface temp. sensor TEK-83E

Direct immersion sensor with terminal cover TEK-83B

Bulb well TEK-00N

Communication function

Type ALE

This product allows the following operations using the communication function.

Saginomiya Seisakusho's monitoring software allows the following checks and operations on the PC.

- Monitoring current temperature
- Checking current settings
- Switching operation mode (COOL/HEAT)
- Registering program
- Setting time
- Saving measurement data
- Monitoring output ON/OFF
- Setting OFF/ON setting values
- Setting calibration
- Enabling/disabling program function
- Locking/unlocking key

* You need to provide an RS-485 communication converter and a communication cable required for communication.

* Please download the monitoring software from the saginomiya website. (Free of charge)


The following shows a summary of communication specifications.

- Interface : IRS-485
- Connection method : Two-wire half-duplex multi-drop connection
- Number of connected units : 16 or less
- Protocol : Modbus
- Transmission mode : Remote Terminal Unit (RTU)


* For details on communication specifications, contact your dealer or Saginomiya Seisakusho.

DIMENSIONS


Type ALE, BLE

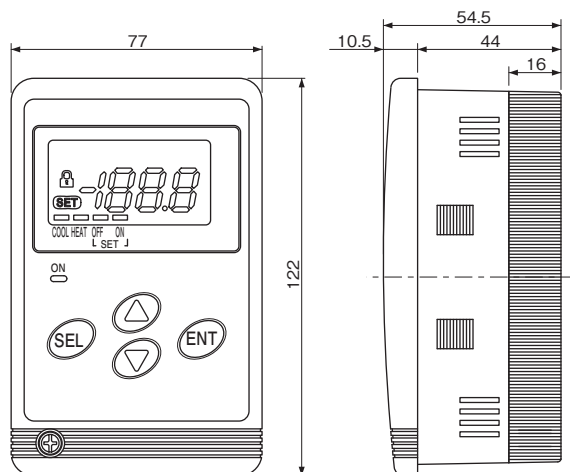

Wall Mount Installation Dimension




Panel Cut Dimension



Unit: mm

OPERATION

Type ALE-AA02 Panel Mount Bracket including Gasket

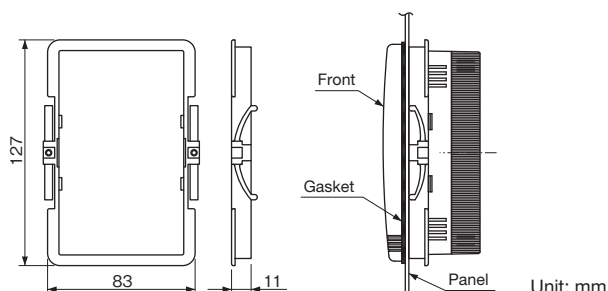

PRESSURE & TEMPERATURE CONTROLS INFORMATION

CONNECTION & ACCESSORIES 45–47

DRIP PROOF & WATER PROOF CONTROLS 48–53

Series **NS-W & NS-P**

CONNECTION & ACCESSORIES

NS PRESSURE CONTROLS NOMENCLATURE

Catalog No. is decided according to the specifications.

Example: HNS – C1 30 X

M1

N

W

G

Q

I II III IV

I N=SUS Bellows

II W=Drip Proof, P=Water Proof (Except for Type HNS, WNS, YNS)

III Connection Style.... Refer to Connection Table Below

IV Option....Special No.

ONS PROTECTION CONTROLS NOMENCLATURE

Catalog No. is decided according to the specifications.

Example: ONS – C1 06 X

N

W

G

Q

I II III IV

I N=SUS Bellows

II W=Drip Proof

III Connection Style.... Refer to Connection Table Below

IV Timer Specification.... Q1~Q12, Q25~Q36

Connection Table (for NS Series Pressure Controls)

Connection Style			Size	Copper					Steel
				1/4"	φ 8	3/8"	φ 10	1/2"	φ 10.5
B	Flare	Except Below		(Stand.)	B1	B2	B3	B4	—
		ANS		B	B1	B2	B3	B4	—
U	Union			U1	U2	—	U (Stand.)	—	U3
G	Female Thread		Rc	G (Stand.)	—	G3	—	G6	—
			G	G1	—	G4	—	G7	—
			NPT	G2	—	G5	—	G8	—
M	Male Thread	Except Below	R	M02	—	M01 (Stand.)	—	M07	—
			G	M03	—	M05	—	M08	—
			NPT	M04	—	M06	—	M09	—
		ANS	R	M1	—	M (Stand.)	—	M6	—
			G	M2	—	M4	—	M7	—
			NPT	M3	—	M5	—	M8	—
K	Flareless	Direct		K1	K2	—	K (Stand.)	—	—
		Connector		—	—	—	—	—	K3

Connection Style		Size	1000 mm	2000 mm
L	Capillary		L1 (Stand.)	L2

NS TEMPERATURE CONTROLS NOMENCLATURE

Catalog No. is decided according to the specifications.

Example: TNS – C1 100 X M2 W L1 Q1
I II III

I W=Drip Proof, P=Water Proof

II Connection Style.... Refer to Connection Table Below

III Option....Special No.

Capillary Length Table





Connection Style	Size	Normal		Nickel Plated	
		Except BNS	BNS	Except BNS	BNS
1m		Standard	L1	Q012	L1Q012
2m			L2		L2Q012
3m			L3		L3Q012
5m			L5		L5Q012
7m			L7		L7Q012
10m			L0		L0Q012
Except Above		LQ	LZ	LQ012	LZQ012




* TNS-C1010XC to TNS-C1070XC: Capillary length are 1m to 5m

Connection Dimension Table

Unit: mm





Unit: mm

(B) Flare		(U) Union		Pipe Thread								
				(G) Female		(M) Male						
												
Size	A	B	C	D	E	F	G					
φ 1/4	φ 6.5	17	12	7/16-20 UNF	0	20.5	26					
φ 8	φ 8.2	22	17	5/8-18 UNF	5	24.5	36					
φ 3/8	φ 9.7											
φ 10	φ 10.2	24	22	3/4-16 UNF	5	27.5	40					
φ 1/2	φ 12.9											
Size	A											
φ 6 Copper	φ 6.5											
φ 8 Copper	φ 8.5											
φ 10 Copper	φ 10.5											
φ 10.5 Steel	φ 11.0											
Size	A	B	C									
1/4"	Rc1/4	19	23									
	G1/4											
	1/4 NPT											
3/8"	Rc3/8	22	23									
	G3/8											
	3/8 NPT											
1/2"	Rc1/2	27	27									
	G1/2											
	1/2 NPT											
Size	A	B	C									
1/4"	R1/4	17	29									
	G1/4											
	1/4 NPT											
3/8"	R3/8	19	29									
	G3/8											
	3/8 NPT											
1/2"	R1/2	22	33									
	G1/2											
	1/2 NPT											

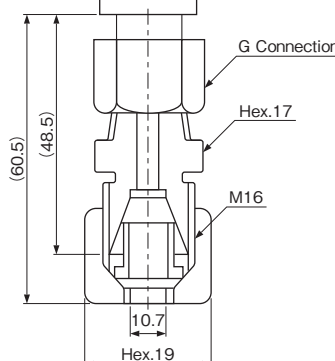(K) Flareless Type Connection				(L) Capillary			
Copper Pipe (Direct)		Steel Pipe (Connector Option)					
							
Size	A	B	C	D	E	F	
φ 6	6.2	14	14	M12	23	33	
φ 8	8.2	17	14	M14	23	33	
φ 10	10.2	19	17	M16	23	34	
				K3			
				Type	L		
				L1	1000		
				L2	2000		


ACCESSORIES

Mounting Brackets

Name	Body Bracket				Bulb Bracket			
	Type	Parts No.	Type	Parts No.	Type	Parts No.	Type	Parts No.
	YS, NS, FE Series	SNS-AE01 (Standard Acce.)	NS Series	SNS-AE02	LWS FWS RWS	LWS-AE08	ALS, BLS	ALS-AE09
		SNS-AE11	ALS, BLS	ALS-AE02			LWS PWS (Except PWS-7060)	LWS-AE12
	ALS, BLS	ALS-AE01						
Form								
	() SNS-AE11						Ambient temp.: -40 to 90°C	


Insert Holder, Protect Tube (For Temperature Controls)

Insert Holder



Size	Max Press.	Torque	A	B	D	E
1/2"	Static	12N · m	Hex. 24	Hex. 22	R1/2	(43)
3/4"	Press. 1MPa	or less	Hex. 32	Hex. 30	R3/4	(54)

Protect Tube

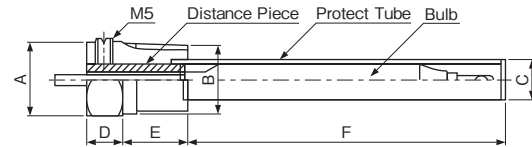

Size	Max Press.	Torque	A	B	D	E
1/2"	Static	12N · m	Hex. 24	R1/2	10	20
3/4"	Press. 3MPa	or less	Hex. 24	R3/4	10	22

Insert Holder

Controls Catalog No.		Size	Parts No.	Size C
NS	TNS-C100 to C134	1/2"	TNS-AB01	φ 6
	CNS-C115 (M2) to C134 (M2)	3/4"	TNS-AB09	
	TNS-C1070	1/2"	TNS-AB04	φ 12.7
	TNS-C1010C to C1070C	3/4"	TNS-AB07	
	TNS-C1100 to C1150	1/2"	TNS-AB17	φ 12.7 Heat Proof
		3/4"	TNS-AB18	
WS	INS-C1070M1	1/2"	TNS-AB02	φ 9.5
		3/4"	TNS-AB05	
	INS-C1120M1, C1150M1	1/2"	TNS-AB15	φ 9.5 Heat Proof
		3/4"	TNS-AB16	
WS	LWS-C1030 to C1094	1/2"	LWS-AB02	φ 9.5
	PWS-7034 to 7094	3/4"	LWS-AB05	
LS	LWS-C1120 to C1240	1/2"	LWS-AB15	φ 9.5 Heat Proof
	PWS-7120	3/4"	LWS-AB16	
	ALS-C1011 to C1050	1/2"	ALS-AB03	φ 10
	BLS-C1020	3/4"	ALS-AB06	
	ALS-C1090	1/2"	ALS-AB10	φ 10 Heat Proof

Protect Tube

Controls Catalog No.		Size	Parts No.		Size C × F
			Copper	SUS	
NS	TNS-C100 to C134	1/2"	TNS-AC01	TNS-AC46	φ 8 × 95
	CNS-C115 (M2) to C134 (M2)	3/4"	TNS-AC35	TNS-AC56	
	TNS-C1070 to C1150	1/2"	TNS-AC05	TNS-AC12	φ 15 × 115
		3/4"	TNS-AC09	TNS-AC14	
	INS-C1070M1 to C1150M1	1/2"	TNS-AC02	TNS-AC11	φ 12 × 95
		3/4"	TNS-AC06	TNS-AC13	
WS	LWS-C1030 to C1090	1/2"	LWS-AC15	LWS-AC21	φ 12 × 110
		3/4"	LWS-AC17	LWS-AC23	
	LWS-C1120 to 1160	1/2"	LWS-AC19	LWS-AC25	φ 12 × 80
	PWS-7120	3/4"	LWS-AC20	LWS-AC26	
	LWS-C1200 to C1240	1/2"	LWS-AC48	LWS-AC50	φ 12 × 80 Heat Proof
		3/4"	LWS-AC49	LWS-AC51	
LS	LWS-C1034 to C1094	1/2"	LWS-AC16	LWS-AC22	φ 12 × 140
	PWS-7034 to 7094	3/4"	LWS-AC18	LWS-AC24	
	EWS-C1080 to C1160	1/2"	EWS-AC27	—	φ 10.8 × 70
			—	EWS-AC28	φ 12 × 75
LS	ALS-C1011 to C1090	1/2"	ALS-AC03	ALS-AC36	φ 12 × 105
		3/4"	ALS-AC07	—	

DRIP PROOF & WATER PROOF CONTROLS

SERIES NS-W & NS-P

SAGInoMIYA

GENERAL DESCRIPTION

- Approved by various marine standards such as Bureau Veritas, Lloyd's Register, Det Norske Veritas · Germanischer Lloyd's, Nippon Kaiji Kyokai, ABS etc.
- Suitable for indoor or outdoor applications where water drips and dusts are apt to enter, such as marine refrigeration units or industrial plants.
- External wiring is made by cabtyre cable connection with cable glands.
Standard gland size: $\phi 20\text{mm}$
Semi standard gland size: $\phi 15\text{mm}$
- To order, specify catalog No. with "W" or "P".
Example: Type SNS-C106XW Drip proof model
Type SNS-C106XP Water proof model



Type SNS-P, FNS-P, ANS-P



Type SNS-W, FNS-W, ANS-W

- Type SNS-W/P — Drip proof and Water proof model of single function pressure controls.

TYPE NUMBER SELECTION (SPECIFICATIONS)

Automatic reset type

Automatic reset type									Unit: MPa (kgf/cm ²)	
Catalog No.		Range		Differential		Factory Setting		Max. Working Pressure	Contact Function	Wt. (kg)
		Min.	Max.	Min.	Max.	Off (On)	On (Off)			
SNS-C101X	W	−0.06 {−50cmHg}	0.1 {1}	0.015 {0.15}	0.05 {0.5}	0.025 {0.25}	0.05 {0.5}	0.3 {3}	Diagram 1	SNS-W: Approx. 1.1 SNS-P: Approx. 0.6
SNS-C102X	W, P	−0.02 {−20cmHg}	0.2 {2}	0.025 {0.25}	0.15 {1.5}			0.5 {5}		
SNS-C103X	W, P	−0.06 {−50cmHg}	0.3 {3}	0.035 {0.35}	0.2 {2}	0.05 {0.5}	0.15 {1.5}	1 {10}		
SNS-C104X	W, P	−0.06 {−50cmHg}	0.4 {4}	0.04 {0.4}		0.1 {1}	0.2 {2}	1.5 {15}		
SNS-C106X	W, P	−0.06 {−50cmHg}	0.6 {6}	0.06 {0.6}	0.4 {4}	0.2 {2}	0.3 {3}			
SNS-C110X	W, P	0.1 {1}	1 {10}	0.1 {1}	0.3 {3}	0.4 {4}	0.6 {6}	3.3 {33}		
SNS-C130X	W, P	0.5 {5}	3 {30}	0.3 {3}	1 {10}	2 {20}	2.5 {25}			
SNS-C135X	W, P	1 {10}	3.5 {35}	0.5 {5}	1.5 {15}	2.5 {25}	3 {30}	3.8 {38}		

Manual reset type

Catalog No.		Range		Manual Reset	* Factory Setting		Max. Working Pressure	Contact Function	Wt. (kg)
		Min.	Max.		Off (On)	On (Off)			
SNS-C102XM2	W, P	-0.02 {-20cmHg}	0.2 {2}	Automatic operation on pressure decrease and manual reset on pressure increase	0.025 {0.25}	Manual Reset	0.5 {5}	Diagram 2	SNS-W: Approx. 1.1 SNS-P: Approx. 0.6
SNS-C106XM2	W, P	-0.06 {-50cmHg}	0.6 {6}		0.2 {2}		1.5 {15}		
SNS-C130XM2	W, P	0.5 {5}	3 {30}		2 {20}		3.3 {33}		

* Based on the 1-3 terminal connection.

ELECTRICAL RATINGS

Rated Voltage (V)		Power Factor (cos ϕ)	125/250V. AC
Rated Current (A)			
Non-Inductive Current		1	12
Inductive Current	Full Load	0.75	
	Inrush Current	—	72

Minimum contact capacity: 50mA

CONTACT FUNCTIONS




Diagram 1





Diagram 2

Diagram 1 & 2	
1	Common Terminal
3	Close on Pressure Increase
5	Close on Pressure Decrease


↑ : Operating direction on press. increase at High Press. Side
M2 ↑ : Operating direction on manual reset

DIMENSIONS

Type SNS-P, FNS-P, ANS-P

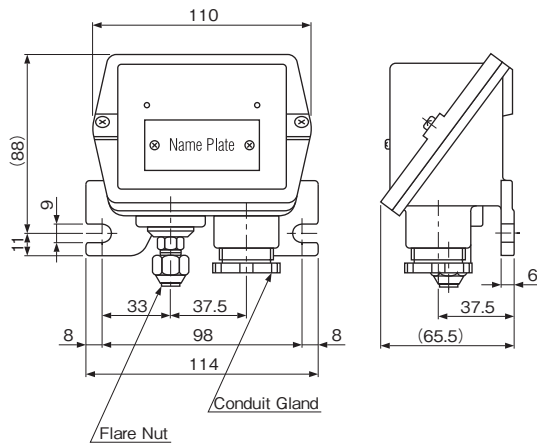

Type SNS-W, FNS-W, ANS-W

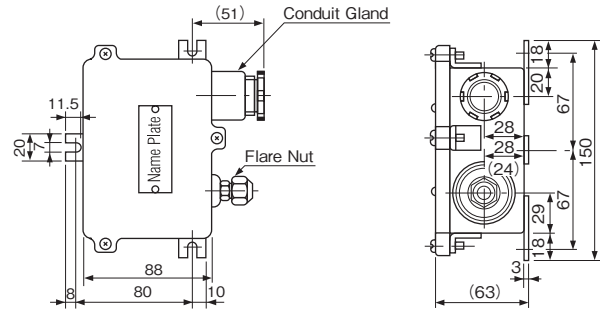

Unit: mm

● Type DNS-W/P — Drip proof and Water proof model of dual function pressure controls



Type DNS-P



Type DNS-W

TYPE NUMBER SELECTION (SPECIFICATIONS)

Automatic reset type

Unit: MPa {kgf/cm²}

Catalog No.		Pressure Side	Range		Differential		Factory Setting		Max. Working Pressure	Contact Function	Wt. (kg)
			Min.	Max.	Min.	Max.	Off	On			
DNS-D304X	W, P	Low Side	-0.06 {-50cmHg}	0.4 {6}	0.04 {0.4}	0.2 {2}	0.1 {1}	0.2 {2}	1.5 {15}	Diagram 3	DNS-W: Approx. 1.4 DNS-P: Approx. 0.9
		High Side	0.8 {8}	3 {30}	Approx. 0.4 fixed. {Approx. 4 fixed.}		2 {20}	1.6 {16}	3.3 {33}		
DNS-D306X	W, P	Low Side	-0.06 {-50cmHg}	0.6 {6}	0.06 {0.6}	0.4 {4}	0.2 {2}	0.3 {3}	1.5 {15}		
		High Side	0.8 {8}	3 {30}	Approx. 0.4 fixed. {Approx. 4 fixed.}		2 {20}	1.6 {16}	3.3 {33}		
DNS-D604X	W, P	Low Side	-0.06 {-50cmHg}	0.4 {6}	0.04 {0.4}	0.2 {2}	0.1 {1}	0.2 {2}	1.5 {15}	Diagram 5	
		High Side	0.8 {8}	3 {30}	Approx. 0.4 fixed. {Approx. 4 fixed.}		2 {20}	1.6 {16}	3.3 {33}		
DNS-D606X	W, P	Low Side	-0.06 {-50cmHg}	0.6 {6}	0.06 {0.6}	0.4 {4}	0.2 {2}	0.3 {3}	1.5 {15}		
		High Side	0.8 {8}	3 {30}	Approx. 0.4 fixed. {Approx. 4 fixed.}		2 {20}	1.6 {16}	3.3 {33}		

Manual reset type

Unit: MPa {kgf/cm²}

Catalog No.		Pressure Side	Range		Differential		Factory Setting		Max. Working Pressure	Contact Function	Wt. (kg)	
			Min.	Max.	Min.	Max.	Off	On				
DNS-D304XM	W, P	Low Side	−0.06 {−50cmHg}	0.4 {4}	0.04 {0.4} 0.2 {2}		0.1 {1}	0.2 {2}	1.5 {15}	Diagram 4	DNS-W: Approx. 1.4 DNS-P: Approx. 0.9	
		High Side	0.8 {8}	3 {30}	Automatic operation on pressure increase and manual reset on pressure decrease		2 {20}	manual reset	3.3 {33}			
DNS-D306XM	W, P	Low Side	−0.06{−50cmHg}	0.4 {4}	0.06 {0.6} 0.4 {4}		0.2 {2}	0.3 {3}	1.5 {15}			
		High Side	0.8 {8}	3 {30}	Automatic operation on pressure increase and manual reset on pressure decrease		2 {20}	manual reset	3.3 {33}			
DNS-D604XM	W, P	Low Side	−0.06{−50cmHg}	0.4 {4}	0.04 {0.4} 0.2 {2}		0.1 {1}	0.2 {2}	1.5 {15}	Diagram 6		
		High Side	0.8 {8}	3 {30}	Automatic operation on pressure increase and manual reset on pressure decrease		2 {20}	manual reset	3.3 {33}			
DNS-D606XM	W, P	Low Side	−0.06{−50cmHg}	0.6 {6}	0.06 {0.6} 0.4 {4}		0.2 {2}	0.3 {3}	1.5 {15}			Diagram 7
		High Side	0.8 {8}	3 {30}	Automatic operation on pressure increase and manual reset on pressure decrease		2 {20}	manual reset	3.3 {33}			
DNS-D606XMM	W	Low Side	−0.06{−50cmHg}	0.6 {6}	Automatic operation on pressure decrease and manual reset on pressure increase		0.2 {2}	manual reset	1.5 {15}	Diagram 7		
		High Side	0.8 {8}	3 {30}	Automatic operation on pressure increase and manual reset on pressure decrease		2 {20}		3.3 {33}			

ELECTRICAL RATINGS

Rated Voltage (V)		Power Factor (cos ϕ)	125/250V. AC
Rated Current (A)			
Non-Inductive Current		1	12
Inductive Current	Full Load	0.75	
	Inrush Current	—	72

CONTACT FUNCTIONS




Diagram 3




Diagram 4




Diagram 5




Diagram 6





Diagram 7


L ↓ : Operating direction on press. increase at Low Press. Side
H ↑ : Operating direction on press. increase at High Press. Side
M ↓ : Operating direction on manual reset

DIMENSIONS

Type DNS-P

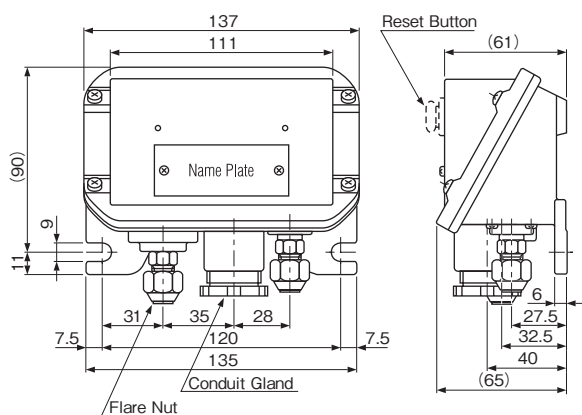

Type DNS-W

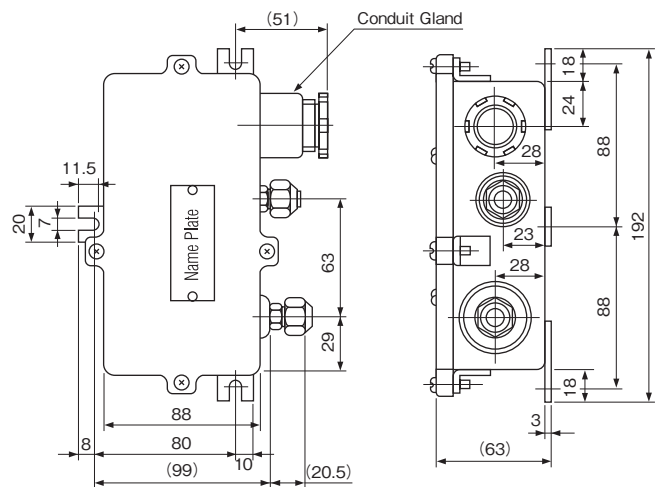

Unit: mm

● Type HNS-W — Drip proof model of single function high pressure controls



HNS-W

TYPE NUMBER SELECTION (SPECIFICATIONS)

Automatic reset type

Unit: MPa {kgf/cm²}

Catalog No.		Range		Differential	* Factory Setting		Max. Working Pressure	Wt. (kg)
		Min.	Max.		Off	On		
HNS-C130X	W	0.8 {8}	3 {30}	0.3 to 0.5 Fixed {3 to 5 fixed}	2 {20}	1.6 {16}	3.3 {33}	Approx. 1.1

For specifications, electrical ratings, and contact functions, refer to page 13, 14.

Manual reset type


Unit: MPa {kgf/cm²}

Catalog No.		Range		Manual Reset	* Factory Setting		Max. Working Pressure	Wt. (kg)
		Min.	Max.		Off	On		
HNS-C130XM1	W	0.8 {8}	3 {30}	Automatic operation on pressure increase and manual reset on pressure decrease	2 {20}	manual reset	3.3 {33}	Approx. 1.1

For specifications, electrical ratings, and contact functions, refer to page 13, 14.

DIMENSIONS

Type HNS-W

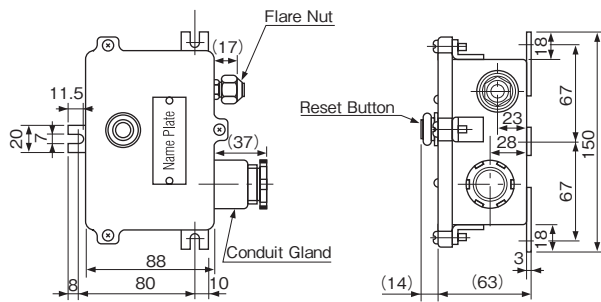

Unit: mm

- Type FNS-W/P & ANS-W/P — Drip proof and Water proof model of single function pressure controls



FNS-W, ANS-W

TYPE NUMBER SELECTION (SPECIFICATIONS)

Type FNS – Fixed narrow differential

Unit: MPa {kgf/cm²}

Catalog No.		Range		Differential	Factory Setting		Max. Working Pressure	Wt. (kg)
		Min.	Max.	Fixed	Off	On		
FNS-C1**X	W, P	-0.06 {-50cmHg} to 0.5 {5}	0.1 {1} to 3 {30}	0.006 Approx. {0.06 Approx.} to 0.12 Approx. {1.2 Approx.}	(0.019) {(0.19)} to (2.38) {(23.8)}	0.025 {0.25} to 2.5 {25}	0.3 {3} to 3.3 {33}	FNS-W: Approx. 1.3 FNS-P: Approx. 0.6

* FNS-C101X, type W is the only available.

For specifications, electrical ratings, and contact functions, refer to page 19, 20.
For dimensions, refer to page 49.

Type ANS – Adjustable narrow differential

Unit: MPa {kgf/cm²}


Catalog No.		Range		Differential				Factory Setting		Max. Working Pressure	Wt. (kg)
				Min.		Max.					
		Min.	Max.	Bottom	Top	Bottom	Top	Off	On		
ANS-C1**XB	W, P	−0.06 {−50cmHg to 1 {10}}	0.1 {1} to 3.5 {35}	0.007 {0.07}	0.007 {0.07}	0.014 {0.14}	0.015 {0.15}	0.018 {0.18}	0.025 {0.25}	0.3 {3} to 3.8 {38}	ANS-W: Approx. 1.3 ANS-P: Approx. 0.6
				0.12 {1.2}	0.2 {2.0}	0.24 {2.4}	0.39 {3.9}	2.82 {28.2}	3 {30}		

* ANS-C101XB, type W is the only available.


For specifications, electrical ratings, and contact functions, refer to page 19, 20.
For dimensions, refer to page 49.

DIMENSIONS

Type FNS-W, Type ANS-W

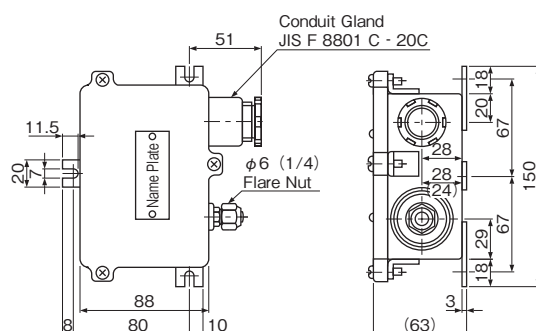

● Type ONS-W , WNS-W & YNS-W — Drip proof model of differential pressure controls

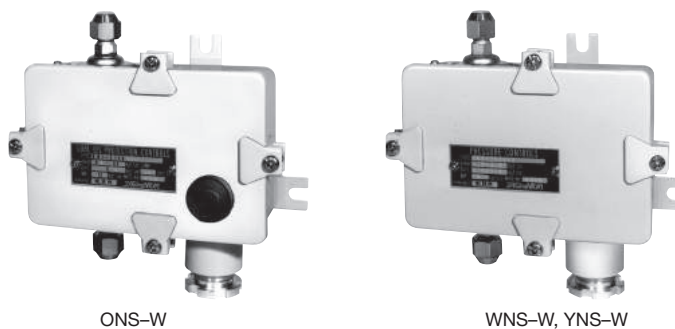

TYPE NUMBER SELECTION (SPECIFICATIONS)

Type ONS – for oil protection

Unit: MPa {kgf/cm²}

Catalog No.		Range		Differential	Timer Specification			Wt. (kg)
		Min.	Max.	Fixed	Delay Time (sec.)	Timer Voltage	Timer Circuit	
ONS-C106X	W	0.05 {0.5}	0.35 {3.5}	Approx. 0.05 {Approx. 0.5}	45, 90, 110	100/200V. AC 110/220V. AC 115/230V. AC 120/240V. AC	Standard (SPST) without Alarm Contact (SPDT)	Approx. 1.3

For specifications, electrical ratings, and contact functions, refer to page 21, 22.

Type WNS – for water, air and fluorinated refrigerant

Unit: MPa {kgf/cm²}

Catalog No.		Range		Differential		Factory Setting		Max. Working Pressure	Limit of Press. Differential (HP > LP)	Wt. (kg)
		Min.	Max.	Min.	Max.	Off	On			
WNS-C102X	W	0.03 {0.3}	0.2 {2}	0.03 {0.3}	0.15 {1.5}	0.05 {0.5}	0.02 {0.2}	0.5 {5}	0.5 {5}	Approx. 1.3
WNS-C106X		0.05 {0.5}	0.35 {3.5}	0.05 {0.5}	0.25 {2.5}	0.1 {1.0}	0.05 {0.5}	1.5 {15}	1.5 {15}	

For specifications, electrical ratings, and contact functions, refer to page 23.

Type YNS – for water, air and fluorinated refrigerant


Unit: MPa {kgf/cm²}

Catalog No.		Range		Differential	Factory Setting		Max. Working Pressure	Limit of Press. Differential (HP > LP)	Wt. (kg)
		Min.	Max.	Fixed	Off	On			
YNS-C102X	W	0.02 {0.2}	0.2 {2}	Approx. 0.015 {Approx. 0.15}	0.05 {0.5}	{0.035} {(0.35)}	0.5 {5}	0.5 {5}	Approx. 1.3
YNS-C106X		0.025 {0.25}	0.35 {3.5}	Approx. 0.025 {Approx. 0.25}	0.15 {1.5}	{0.125} {(1.25)}	1.5 {15}	1.5 {15}	


For specifications, electrical ratings, and contact functions, refer to page 23.

DIMENSIONS

Type ONS-W

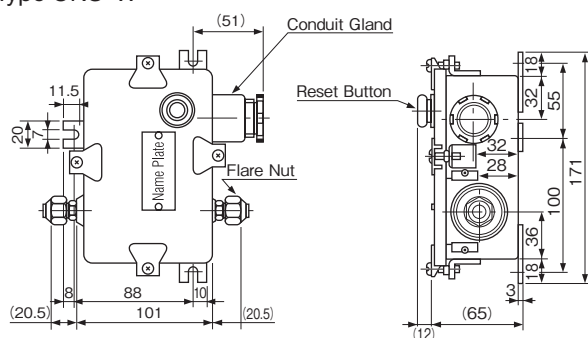


Type WNS-W, YNS-W

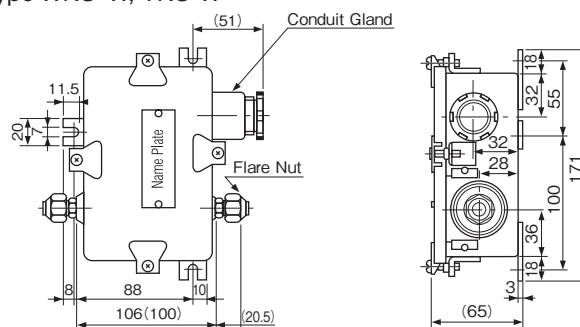

Unit: mm

- Type TNS-W/P, CNS-W/P & INS-W — Drip proof and Water proof model of temperature controls

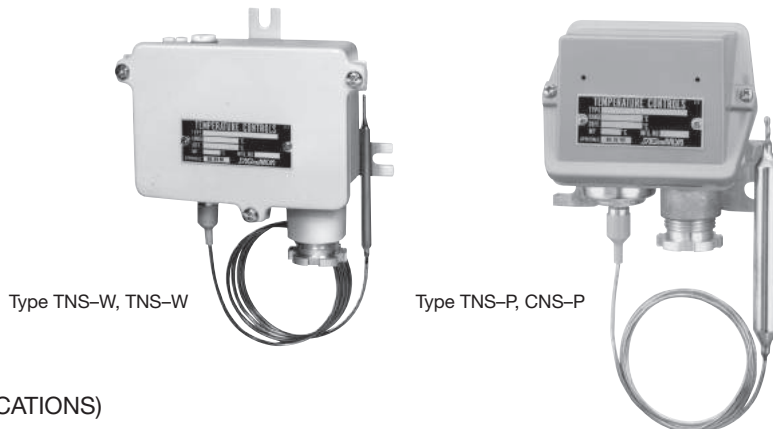

TYPE NUMBER SELECTION (SPECIFICATIONS)

Type TNS – Automatic reset type

Unit: °C

Catalog No.		Range		Differential		Factory Setting		Limit Temp.	Usage Condition	Wt. (kg)
		Min.	Max.	Min.	Max.	Off (On)	On (Off)			
TNS-C1* *X	W, P	-45 to 115	0 to 150	2 to 5	15, 20	-18 to 140	-15 to 145	40 to 180	$T_s > T_b$, $T_s < T_b$, $T_s \leq T_b$	TNS-W: Approx. 1.3 TNS-P: Approx. 0.7

For specifications, electrical ratings, and contact functions, refer to page 31, 32.

Type CNS – Automatic reset type

Unit: °C

Catalog No.		Range		Differential	Factory Setting		Limit Temp.	Usage Condition	Wt. (kg)
		Min.	Max.		Off	On			
CNS-C1* *X	W, P	-35 to 0	-15 to 35	Bottom 4 Top 3	-28 to 17	-25 to 20	70	$T_s > T_b$	CNS-W: Approx. 1.3 CNS-P: Approx. 0.7

For specifications, electrical ratings, and contact functions, refer to page 31, 32.

Type CNS – Manual reset type

Unit: °C

Catalog No.		Range		Manual Reset	Factory Setting		Limit Temp.	Usage Condition	Wt. (kg)
		Min.	Max.		Off	On			
CNS-C1* *XM2	W, P	-35 to 0	-15 to 35	Automatic operation on temperature decrease and manual reset on temperature increase.	-28 to 17	Manual Reset	70	$T_s > T_b$	CNS-W: Approx. 1.3 CNS-P: Approx. 0.7

For specifications, electrical ratings, and contact functions, refer to page 31, 32.

Type INS – Manual reset type


Unit: °C

Catalog No.		Range		Manual Reset	Factory Setting		Limit Temp.	Usage Condition	Wt. (kg)
		Min.	Max.		Off	On			
INS-C1070XM1	W	25 to 115	75 to 150	Automatic operation on temperature increase and manual reset on temperature decrease.	Manual Reset	65 to 140	115 to 180	$T_s < T_b$	Approx. 1.3


For specifications, electrical ratings, and contact functions, refer to page 31, 32.

DIMENSIONS


Type TNS-P, CNS-P

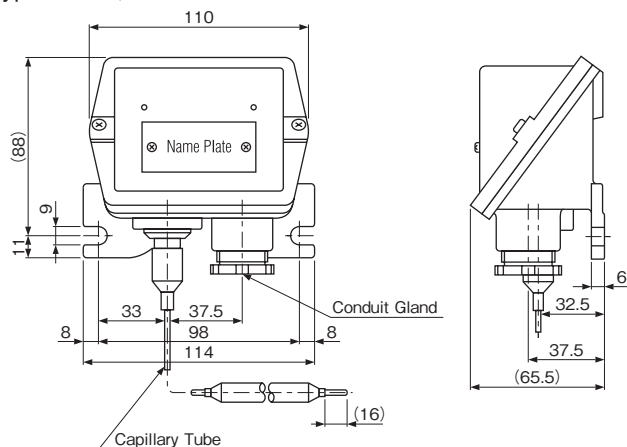

Type TNS-W, CNS-W

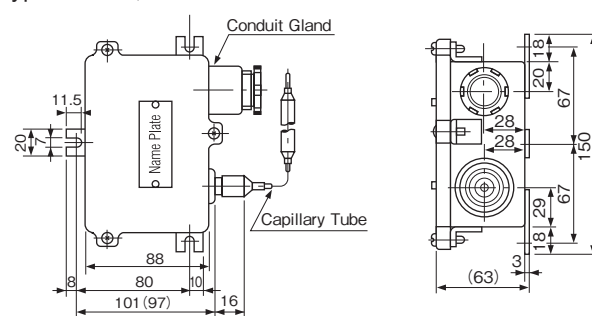

Type INS-W

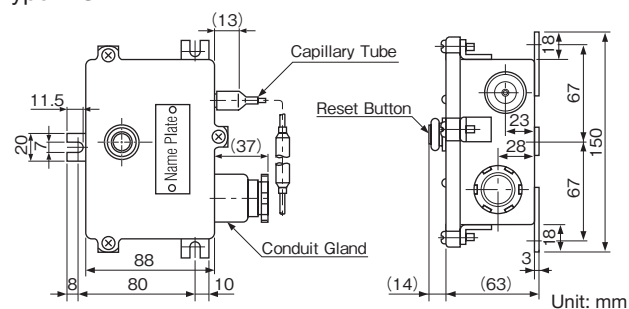

Unit: mm

EXPANSION VALVES

GENERAL INFORMATION	55–56
EXPANSION VALVES	57
Type ARX	
EXPANSION VALVES	58–60
Type QCX & RCX	
EXPANSION VALVES	61–63
Type SCX	
EXPANSION VALVES	65–66
Type ATX (R410A)	
EXPANSION VALVES	67–68
Type ATX	
EXPANSION VALVES	69–70
Type AEX	
ELECTRONIC EXPANSION VALVES	71–73
Type UKV, VKV & AKV	
ELECTRONIC EXPANSION VALVES	74
Type UKV-F	
PULSE CONVERTERS	75
Type LNE	

EXPANSION VALVES

GENERAL INFORMATION

SAGINOMIYA

VALVE SELECTION

In order to properly select Expansion Valves, the following items should be considered.

- 1) Required valve capacity should be based on the actual system operating conditions rather than the normal valve capacity rating.
- 2) When there exists an appreciable pressure drop between the valve outlet and the evaporator outlet, i.e., above 0.02 MPa {0.2 kgf/cm²}, or when a pressure drop type of refrigerant distributor is used at the evaporator inlet, the valve should have the external equalizer feature for best performance. Otherwise, it will increase a static superheat (valve opening temp.), restricting the refrigerant flow and causing the reduction of system capacity. As for R134a, 0.01 MPa {0.1kgf/cm²} pressure drop will increase the static superheat approximately 1°C.
- 3) Internally equalized valve may be used with the evaporator which has a negligible pressure drop, i.e., below 0.02 MPa {0.2 kgf/cm²}

GUIDE FOR EQUALIZER (Internal or External)

An internal or external equalizer should be selected depending on pressure drop between valve outlet and evaporator outlet. Internal equalizer increases superheat in the refrigeration system of which evaporator has some pressure drop, and the increase of superheat decreases the effective area of evaporator.

Select internal or external equalizer depending on refrigerant, pressure drop and evaporating temperature. The Guide Table for Equalizer indicates the pressure difference of refrigerant corresponding to 1°C temperature. The external equalizer valves should be used when the pressure drop exceeds the value of pressure difference indicated in the Table.

GUIDE TABLE FOR EQUALIZER

Unit: MPa {kgf/cm²}

Refrigerant	Evaporating Temperature (°C)									
	10	5	0	−5	−10	−20	−30	−40	−50	−60
R134a	0.014 {0.14}	0.012 {0.12}	0.011 {0.11}	0.009 {0.09}	0.008 {0.08}	0.006 {0.06}	0.004 {0.04}	0.003 {0.03}	—	—
R22	0.024 {0.24}	0.02 {0.20}	0.018 {0.18}	0.016 {0.16}	0.014 {0.14}	0.011 {0.11}	0.008 {0.08}	0.006 {0.06}	0.004 {0.04}	0.003 {0.03}
R404A	0.025 {0.25}	0.022 {0.22}	0.019 {0.19}	0.017 {0.17}	0.015 {0.15}	0.012 {0.12}	0.008 {0.08}	0.006 {0.06}	0.004 {0.04}	0.003 {0.03}
R407C	0.021 {0.21}	0.018 {0.18}	0.016 {0.16}	0.014 {0.14}	0.012 {0.12}	0.009 {0.09}	0.006 {0.06}	0.004 {0.04}	0.003 {0.03}	0.002 {0.02}
R410A	0.033 {0.33}	0.029 {0.29}	0.026 {0.26}	0.023 {0.23}	0.020 {0.20}	0.015 {0.15}	0.011 {0.11}	0.008 {0.08}	0.006 {0.06}	0.004 {0.04}

Pressure Diff. corresponding to 1°C temperature.

GUIDE FOR SETTING OF SUPERHEAT

Superheat Adjuster of Expansion Valve adjusts the superheat by which the valve begins to open from the fully closed condition, and this superheat is called Static Superheat.

S.S.H.: Static Superheat

O.S.H.: Operating Superheat (Superheat necessary for valve and refrigeration system operation)

S.H.C.: Superheat Change (Superheat which keeps the valve opening at the optimum balance point for refrigeration systems)

$S.S.H. = O.S.H. - S.H.C.$

To change the adjustment, remove the seal cap and turn the adjusting spindle. Turning the spindle clockwise to compress the spring decreases flow and raises superheat and turning the spindle counter clockwise to loosen the spring increases flow and lowers superheat.

CHARGE & MOP (MAXIMUM OPERATING PRESSURE)

G-Charge: Gas charge used generally on air conditioning gives pressure limiting, but loses control if valve body becomes colder than sensing bulb. A gas charged valve should be installed in a location where the valve body can be warmer than the bulb to prevent condensation of the charge in the powerhead.

L-Charge: Liquid charge provides accurate control when valve body becomes colder than sensing bulb; hence a liquid charged valve may be installed in any location regardless of temperature. The charge, however, does not provide maximum operating pressure (pressure limiting) for motor overload protection.

C-Charge: Cross charge and Cross Low Temp. charge used generally on low temperature range application will not lose control even if valve body becomes colder than sensing bulb. A cross charged valve may be installed in any location regardless of temperature. Cross charge (C) for normal refrigeration (higher than -40°C temp. range) and Cross Low Temp. charge (CL and CY) for low temp. refrigeration (CY... -70 to -40°C with R22 for Type ATX valves).

S-Charge: Saginomiya's all purpose special charge combines the best properties of gas and liquid charges. The charge provides accurate control even if valve body becomes colder than sensing bulb and further it provides MOP (pressure limiting) for motor overload protection. S-charged valve may be installed in any location regardless of temperature.

ORDERING INFORMATION

1) Catalog Number ... On standard products, specify the Catalog No. only.

2) Special Specifications ... On special applications, specify the followings:

- | | |
|--|---------------------------------------|
| a) Normal Pressure and Maximum Pressure | g) Length of Capillary Tube |
| b) Normal Temperature and Minimum Temperature | h) External or Internal Evaporator |
| c) Detailed Application | i) Pressure Drop at Evaporator |
| d) Refrigerant | j) MOP (Maximum Operating Pressure) |
| e) Valve Location | k) Two Stage Compressor System or not |
| f) Capacity (Condensing & Evaporating Temperature) | |

EXPANSION VALVES (SMALL CAPACITY TYPE)

High Volume OEM Item

Type **ARX**

SAGINO MIYA

GENERAL DESCRIPTION

- This product is expansion valve for small capacity.
- Application: Bottle cooler, display case, ice making machine, industrial air conditioner.

SPECIFICATIONS

- Charge: S-charge (MOP20°C), C-charge, CL-charge
- Max. working pressure: 3.0MPa {30kgf/cm²}
- Adjustable range of static superheat: 0 to 5°C

VALVE NOMENCLATURE

Catalog No. is decided according to the specifications.

Example: ARX - 2303 D H S
I II III IV V

I : Type..... ARX-Small capacity thermostatic expansion valve

II: Model..... The first and the second digits indicate inlet and outlet pipe size respectively.
The last two digits indicate nominal capacity.

III: Connection..... D-Solder Connection

IV: Refrigerant..... H = R22, M = R134a, P = R407C, U = R404A

V: Charge type..... S = S-charge, C = C-charge, CL = CL-charge




TYPE NUMBER SELECTION

Catalog No.					Capacity (U.S.R.T.) {kW}				Connection		Capil. Tube Length (mm)	Wt. (kg)
Type	Model	Connection	Refrigerant	Charge	R134a	R22	R407C	R404A	Inlet	Outlet		
ARX-	2303	D (Solder)	H(R22) M(R134a) P(R407C) U(R404A)	S	0.48 {1.69}	0.36 {1.27}	0.50 {1.76}	0.34 {1.20}	5/16"	3/8"	200	0.12
	2305			(R22, R134a, R404A, R407C)	0.80 {2.81}	0.60 {2.11}	0.82 {2.88}	0.57 {2.00}				
	2308			C	1.28 {4.57}	0.96 {3.37}	1.34 {4.71}	0.93 {3.27}				
	2310			(R22) CL	1.60 {5.63}	1.20 {4.22}	1.65 {5.80}	1.14 {4.01}				
	2315			(R22, R404A)	2.40 {8.44}	1.80 {6.33}	2.47 {8.70}	1.71 {6.01}				

Capacity: Based on condensing temp. 38°C and evaporating temp. 5°C.

DIMENSIONS

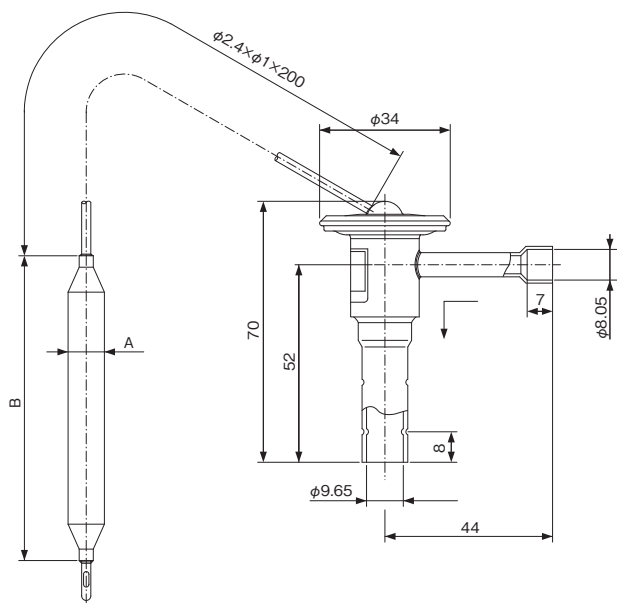

Unit: mm

Refrigerant	Charge	A	B
H(R22) M(R134a) U(R404A)	S	3/8"	80
P(R407C)	S	1/2"	80
H(R22)	C	1/2"	80
H(R22) U(R404A)	CL	3/8"	50

EXPANSION VALVES

Type QCX & RCX

SAGInoMIYA

GENERAL DESCRIPTION

- Application: Commercial refrigerator, freezer, air conditioner, cold chain box, etc.
- Suitable for refrigeration systems with hot gas defrosting.
- Type QCX ... Internal equalizer type
Type RCX ... External equalizer type
- The same products can be used for R22 and R407C.
- With superheat external adjust device.

SPECIFICATIONS

- Max. working pressure: 3.0 MPa {30kgf/cm²}
- Adjustable range of static superheat:
1 to 7°C at R22, R134a, R404A
1 to 5°C at R407C, R410A
- $\bigcirc$ Increase about 0.045MPa / rotation
- Superheat change: 4 to 5°C (C, SL-charge)
3 to 4°C (SA-charge)



Type QCX-B



Type QCX-D



Type RCX-B



Type RCX-D

Charge		A Zone	R Zone	F Zone	MOP (°C)	Temp. Condition
		Evaporating Temp. (°C)				Power Element Temp.: Ts, Sensing Bulb Temp.: TB
SA	R22	−40 to 10	—	—	18	Ts ≧ TB
C		—	−40 to 0		—	Ts ≧ TB
SL			—	−60 to −25	−20	Ts ≧ TB
C	R134a	−30 to 10		—	—	Ts ≧ TB
SA	R404A	−40 to 10	—	—	18	Ts ≧ TB
C		—	−40 to 0		—	Ts ≧ TB
SL			—	−60 to −25	−20	Ts ≧ TB
SA	R407C	−40 to 10	—	—	18	Ts ≧ TB
C		—	−40 to 0		—	Ts ≧ TB
SA	R410A	−45 to 10	—	—	18	Ts ≧ TB
C		—	−40 to −10		—	Ts ≧ TB

VALVE NOMENCLATURE

Catalog No. is decided according to the specifications.

Example: $\frac{\text{QCX}}{\text{I}} - \frac{0234}{\text{II}} \frac{\text{B}}{\text{III}} \frac{\text{U}}{\text{IV}} \frac{\text{SA}}{\text{V}}$

I : Type..... QCX-Internal equalizer type, RCX-External equalizer type

II : Model..... The first and the second digits indicate nominal capacity.

The last two digits indicate inlet and outlet pipe size respectively.

III : Connection..... B-Flare Connection, D-Solder Connection

IV : Refrigerant..... M = R134a, H = R22, R407C, U = R404A, V = R410A

V : Charge type..... SL = SL-charge, C = C-charge, SA = SA-charge

TYPE NUMBER SELECTION (1)

Application		Catalog No.		Refrigerant	Capacity (U.S.R.T.) {kW}		Connection		Capil. Tube Length (mm)	Wt. (kg)
					A,R Zone	F Zone				
					C.T. 38°C	C.T. 38°C	Inlet	Outlet		
					E.T. —5°C	E.T. —30°C				
F Zone	Freezing —60 to —25°C (SL: R22, R404A)	QCX- RCX-	0334B[D]HSL	R22	—	0.22 {0.79}	3/8" Flare [B] [3/8" Solder [D]]	1/2" Flare [B] [1/2" Solder [D]]	ϕ 2.4 × 1500	0.28 (QCX-***34B) 0.24 (QCX-***34D) 0.29 (RCX-***34B) 0.24 (RCX-***34D)
			0534B[D]HSL			0.33 {1.16}				
			0834B[D]HSL			0.54 {1.91}				
			1234B[D]HSL			0.87 {3.07}				
			1634B[D]HSL			1.10 {3.87}				
			2434B[D]HSL			1.68 {5.91}				
			3134B[D]HSL			2.27 {7.97}				
			4734B[D]HSL			3.10 {10.9}				
		0234B[D]USL	R404A	—	0.13 {0.46}					
		0334B[D]USL			0.19 {0.68}					
		0534B[D]USL			0.32 {1.11}					
		0834B[D]USL			0.51 {1.79}					
		1034B[D]USL			0.64 {2.25}					
		1534B[D]USL			0.98 {3.44}					
		2034B[D]USL			1.32 {4.63}					
		3034B[D]USL			1.80 {6.34}					
R Zone	Refrigeration —40 to 0°C (C: R22, R404A, R407C)	QCX- RCX-	0334B[D]HC	R22	—	0.31 {1.10}				
			0534B[D]HC			0.47 {1.65}				
			0834B[D]HC			0.78 {2.75}				
			1234B[D]HC			1.25 {4.41}				
			1634B[D]HC			1.57 {5.51}				
			2434B[D]HC			2.35 {8.26}				
			3134B[D]HC			3.13 {11.0}				
			4734B[D]HC			4.69 {16.5}				
			0234B[D]UC	R404A	—	0.20 {0.70}				
			0334B[D]UC			0.30 {1.05}				
			0534B[D]UC			0.49 {1.74}				
			0834B[D]UC			0.78 {2.76}				
			1034B[D]UC			0.99 {3.48}				
			1534B[D]UC			1.48 {5.22}				
			2034B[D]UC			1.98 {6.95}				
			3034B[D]UC			2.96 {10.4}				
		0334B[D]HC	R407C	—	0.32 {1.13}					
		0534B[D]HC			0.48 {1.70}					
		0834B[D]HC			0.81 {2.84}					
		1234B[D]HC			1.29 {4.54}					
		1634B[D]HC			1.61 {5.67}					
		2434B[D]HC			2.42 {8.51}					
		3134B[D]HC			3.21 {11.3}					
		4734B[D]HC			4.83 {17.0}					
	Refrigeration —30 to 10°C (C: R134a)	QCX- RCX-	0234B[D]MC	R134a	—	0.24 {0.85}				
			0434B[D]MC			0.36 {1.28}				
			0634B[D]MC			0.61 {2.13}				
			1034B[D]MC			0.96 {3.38}				
			1234B[D]MC			1.21 {4.27}				
			1834B[D]MC			1.82 {6.40}				
			2434B[D]MC			2.43 {8.54}				
			3634B[D]MC			3.64 {12.8}				
	Refrigeration —40 to —10°C (C: R410A)	QCX- RCX-	0334B[D]VC	R410A	—	0.35 {1.22}				
			0534B[D]VC			0.52 {1.83}				
			0934B[D]VC			0.86 {3.04}				
			1434B[D]VC			1.37 {4.82}				
			1734B[D]VC			1.73 {6.08}				
			2634B[D]VC			2.59 {9.12}				
			3534B[D]VC			3.44 {12.1}				
			5234B[D]VC			5.18 {18.2}				

• External equalizer for RCX: 1/4" flare (for all flare outlet bodies) , 1/4" solder[D] (for all solder outlet bodies)


TYPE NUMBER SELECTION (2)

Application		Catalog No.		Refrigerant	Capacity (U.S.R.T.) {kW}		Connection		Capil. Tube Length (mm)	Wt. (kg)	
					A,R Zone	F Zone					
					C.T. 38°C	C.T. 38°C	Inlet	Outlet			
					E.T. −5°C	E.T. −30°C					
A Zone	Air Conditioning −40 to 10°C (SA: R22, R404A, R407C)	QCX- RCX-	0334B[D]HSA	R22	0.31 {1.10}	—	3/8" Flare [B]	1/2" Flare [B]	ϕ 2.4 × 1500	0.28 (QCX-***34B) 0.24 (QCX-***34D) 0.29 (RCX-***34B) 0.24 (RCX-***34D)	
			0534B[D]HSA		0.47 {1.65}						
			0834B[D]HSA		0.78 {2.75}						
			1234B[D]HSA		1.25 {4.41}						
			1634B[D]HSA		1.57 {5.51}						
			2434B[D]HSA		2.35 {8.26}						
			3134B[D]HSA		3.13 {11.0}						
			4734B[D]HSA		4.69 {16.5}						
			0234B[D]USA	R404A	0.20 {0.70}	—					
			0334B[D]USA		0.30 {1.05}						
			0534B[D]USA		0.49 {1.74}						
			0834B[D]USA		0.78 {2.76}						
			1034B[D]USA		0.99 {3.48}						
			1534B[D]USA		1.48 {5.22}						
			2034B[D]USA		1.98 {6.95}						
			3034B[D]USA		2.96 {10.4}						
			0334B[D]HSA	R407C	0.32 {1.13}	—					
			0534B[D]HSA		0.48 {1.70}						
			0834B[D]HSA		0.81 {2.84}						
			1234B[D]HSA		1.29 {4.54}						
			1634B[D]HSA		1.61 {5.67}						
			2434B[D]HSA		2.42 {8.51}						
			3134B[D]HSA		3.21 {11.3}						
			4734B[D]HSA		4.83 {17.0}						
	Air Conditioning −45 to 10°C (SA:R410A)		0334B[D]VSA	R410A	0.35 {1.22}	—					
					0534B[D]VSA						0.52 {1.83}
					0934B[D]VSA						0.86 {3.04}
					1434B[D]VSA						1.37 {4.82}
					1734B[D]VSA						1.73 {6.08}
					2634B[D]VSA						2.59 {9.12}
					3534B[D]VSA						3.44 {12.1}
					5234B[D]VSA						5.18 {18.2}


• External equalizer for RCX: 1/4" flare (for all flare outlet bodies) , 1/4" solder (for all solder outlet bodies)

DIMENSIONS


Type QCX-B

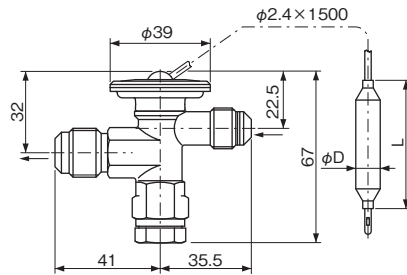


Type QCX-D

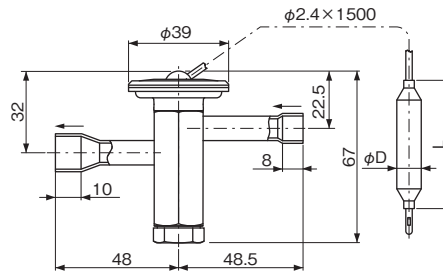

Type RCX-B

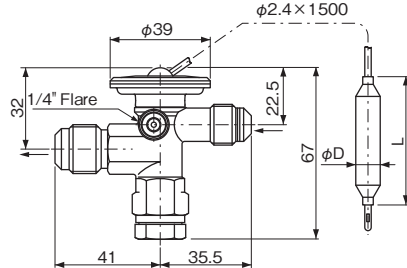


Type RCX-D

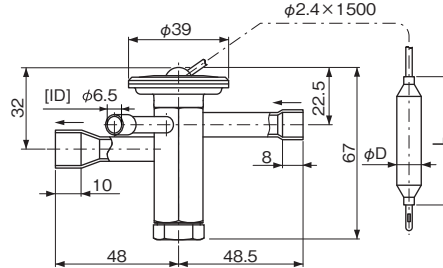

ACCESSORY

• Sensing Bulb Mounting Band

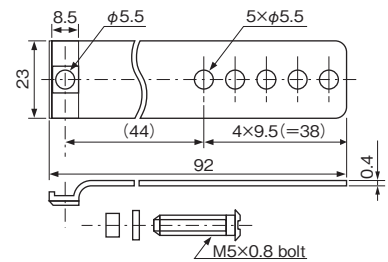

	D	L
SA	12.7	80
C	9.5	50
SL	12.7	80

Unit: mm

EXPANSION VALVES

Type SCX

SAGINO MIYA

GENERAL DESCRIPTION

- Application: Chillers, cold chain boxes, heat pump air conditioner, air conditioning, etc.
- Suitable for refrigeration systems with hot gas defrosting.
- The same products can be used for R22 and R407C.
- With superheat external adjust device.

SPECIFICATIONS

- Max. working pressure: 3.0 MPa {30kgf/cm²}
- Adjustable range of static superheat:
1 to 7°C at R22, R134a, R404A
1 to 5°C at R407C, R410A
- $\bigcirc$ Increase about 0.045MPa / rotation
- Superheat change: 4 to 5°C (C, SL-charge)
3 to 4°C (SA-charge)



Type SCX-D



Type SCX-B

Charge		A Zone	R Zone	F Zone	MOP (°C)	Temp. Condition
		Evaporating Temp. (°C)				Power Element Temp.: Ts, Sensing Bulb Temp.: Tb
SA	R22	−40 to 10	—	—	18	Ts ≥ Tb
C		—	−40 to 0		—	Ts ≡ Tb
SL			—	−60 to −25	−20	Ts ≥ Tb
C	R134a	−30 to 10		—	—	Ts ≡ Tb
SA	R404A	−40 to 10	—	—	18	Ts ≥ Tb
C		—	−40 to 0		—	Ts ≡ Tb
SL			—	−60 to −25	−20	Ts ≥ Tb
SA	R407C	−40 to 10	—	—	18	Ts ≥ Tb
C		—	−40 to 0		—	Ts ≡ Tb
SA	R410A	−45 to 10	—	—	18	Ts ≥ Tb
C		—	−40 to −10		—	Ts ≡ Tb

VALVE NOMENCLATURE

Catalog No. is decided according to the specifications.

Example: $\frac{\text{SCX}}{\text{I}}$ - $\frac{0445}{\text{II}}$ $\frac{\text{D}}{\text{III}}$ $\frac{\text{U}}{\text{IV}}$ $\frac{\text{SA}}{\text{V}}$

I : Type..... SCX-External equalizer type

II: Model..... The first and the second digits indicate nominal capacity.
The last two digits indicate inlet and outlet pipe size respectively.

III: Connection..... B-Flare Connection, D-Solder Connection

IV: Refrigerant..... H = R22, M = R134a, P = R407C, U = R404A, V = R410A


V: Charge type..... SL = SL-charge, C = C-charge, SA = SA-charge

TYPE NUMBER SELECTION


Application			Catalog No.	Refrigerant	Capacity (U.S.R.T.){kW}		Connection			Capil. Tube Length (mm)	Wt. (kg)
					A,R Zone	F Zone					
					C.T. 38°C	C.T. 38°C	Inlet	Outlet	Equalizer		
					E.T. —5°C	E.T. —30°C					
F Zone	Freezing	—60 to —25°C (SL:R22,R404A)	SCX—	0645D[B]HSL 0845D[B]HSL 1057DHSL 1257DHSL 1457DHSL	R22	—	3.25 {11.4}	1/2" Solder(D) [1/2" Flare(B)]	5/8" Solder(D) [5/8" Flare(B)]	1/4" Solder(D) [1/4" Flare(B)]	0.31 (SCX—**45D) 0.39 [SCX—**45B] 0.32 (SCX—**57D)
							4.53 {15.9}	5/8" Solder(D)	7/8" Solder(D)		
							5.70 {20.0}				
							6.83 {24.0}				
							8.08 {28.4}				
			R404A	—	1.92 {6.74}	1/2" Solder(D) [1/2" Flare(B)]	5/8" Solder(D) [5/8" Flare(B)]				
					2.67 {9.39}	5/8" Solder(D)	7/8" Solder(D)				
					3.36 {11.8}						
					4.03 {14.2}						
					4.76 {16.7}						
R Zone	Refrigeration	—30 to 10°C (C:R134a)	SCX—	0545D[B]MC 0745D[B]MC 0857DMC 1057DMC 1257DMC	R134a	—	4.76 {16.7}	1/2" Solder(D) [1/2" Flare(B)]	5/8" Solder(D) [5/8" Flare(B)]	1/4" Solder(D) [1/4" Flare(B)]	0.31 (SCX—**45D) 0.39 [SCX—**45B] 0.32 (SCX—**57D)
							6.62 {23.3}	5/8" Solder(D)	7/8" Solder(D)		
							8.32 {29.3}				
							9.98 {35.1}				
							11.8 {41.5}				
		—40 to 0°C (C:R22,R404A,R407C)	SCX—	0645D[B]HC 0845D[B]HC 1057DHC 1257DHC 1457DHC	R22	—	5.78 {20.3}	1/2" Solder(D) [1/2" Flare(B)]	5/8" Solder(D) [5/8" Flare(B)]		
							8.05 {28.3}	5/8" Solder(D)	7/8" Solder(D)		
							10.1 {35.6}				
							12.1 {42.6}				
							14.4 {50.5}				
				R404A	—	3.65 {12.8}	1/2" Solder(D) [1/2" Flare(B)]	5/8" Solder(D) [5/8" Flare(B)]			
						5.08 {17.9}	5/8" Solder(D)	7/8" Solder(D)			
						6.38 {22.5}					
						7.66 {26.9}					
						9.06 {31.9}					
				R407C	—	5.95 {20.9}	1/2" Solder(D) [1/2" Flare(B)]	5/8" Solder(D) [5/8" Flare(B)]			
						8.29 {29.1}	5/8" Solder(D)	7/8" Solder(D)			
						10.4 {36.6}					
						12.5 {43.9}					
						14.8 {52.0}					
		—40 to —10°C (C:R410A)	SCX—	0645D[B]VC 0945D[B]VC 1157DVC 1357DVC 1657DVC	R410A	—	6.38 {22.4}	1/2" Solder(D) [1/2" Flare(B)]	5/8" Solder(D) [5/8" Flare(B)]		
							8.87 {31.2}	5/8" Solder(D)	7/8" Solder(D)		
							11.2 {39.2}				
							13.4 {47.0}				
							15.8 {55.6}				
A Zone	Air Conditioning	—40 to 10°C (SA:R22,R404A,R407C)	SCX—	0645D[B]HSA 0845D[B]HSA 1057DHSA 1257DHSA 1457DHSA	R22	—	5.78 {20.3}	1/2" Solder(D) [1/2" Flare(B)]	5/8" Solder(D) [5/8" Flare(B)]	1/4" Solder(D) [1/4" Flare(B)]	0.31 (SCX—**45D) 0.39 [SCX—**45B] 0.32 (SCX—**57D)
							8.05 {28.3}	5/8" Solder(D)	7/8" Solder(D)		
							10.1 {35.6}				
							12.1 {42.6}				
							14.4 {50.5}				
				R404A	—	3.65 {12.8}	1/2" Solder(D) [1/2" Flare(B)]	5/8" Solder(D) [5/8" Flare(B)]			
						5.08 {17.9}	5/8" Solder(D)	7/8" Solder(D)			
						6.38 {22.5}					
						7.66 {26.9}					
						9.06 {31.9}					
				R407C	—	5.95 {20.9}	1/2" Solder(D) [1/2" Flare(B)]	5/8" Solder(D) [5/8" Flare(B)]			
						8.29 {29.1}	5/8" Solder(D)	7/8" Solder(D)			
						10.4 {36.6}					
						12.5 {43.9}					
						14.8 {52.0}					
		—45 to 10°C (SA:R410A)	SCX—	0645D[B]VSA 0945D[B]VSA 1157DVSA 1357DVSA 1657DVSA	R410A	—	6.38 {22.4}	1/2" Solder(D) [1/2" Flare(B)]	5/8" Solder(D) [5/8" Flare(B)]		
							8.87 {31.2}	5/8" Solder(D)	7/8" Solder(D)		
							11.2 {39.2}				
							13.4 {47.0}				
							15.8 {55.6}				

DIMENSIONS


Type SCX-**45D

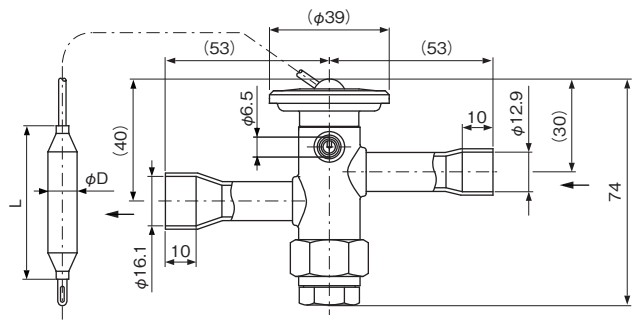

Type SCX-**45B

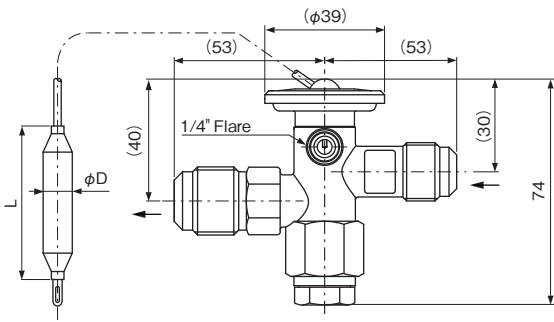

Type SCX-**57D

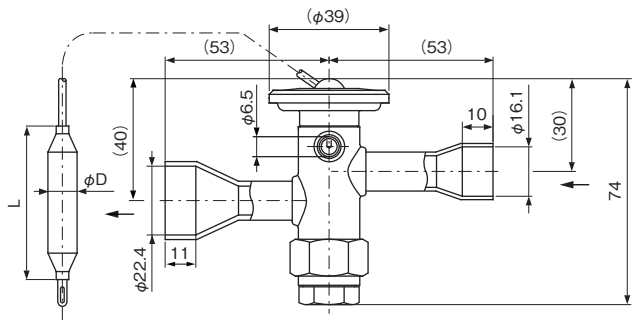


	D	L
SA	12.7	80
C	9.5	50
SL	12.7	80

Unit: mm

ACCESSORY

- Sensing Bulb Mounting Band

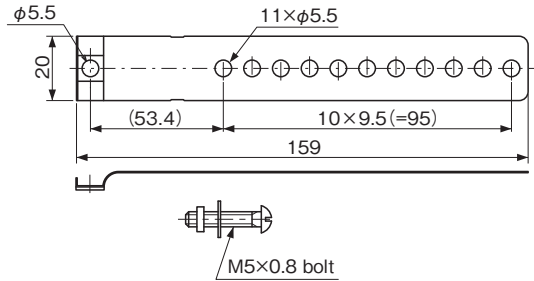

EXPANSION VALVES

Type ATX (R410A)

SAGINO MIYA

GENERAL DESCRIPTION

- Applicable for R410A
- Application: General refrigeration and air conditioning system.
- Suitable for refrigeration systems with hot gas defrosting.

SPECIFICATIONS

- Max. working pressure: 3.3 MPa {33kgf/cm²}
- Adjustable range of static superheat: 1 to 7°C
- ○ Increase about 0.007MPa / rotation



TYPE ATX-D

Charge	Evaporating Temp.(°C)	MOP (°C)	Temp. Condition
			Power Element Temp.: Ts, Sensing Bulb Temp.: Tb
C	10 to -20	—	Ts ≧ Tb
CL	-10 to -40		

VALVE NOMENCLATURE

Catalog No. is decided according to the specifications.

Example: $\frac{\text{ATX}}{\text{I}} - \frac{34006}{\text{II}} \frac{\text{B}}{\text{III}} \frac{\text{V}}{\text{IV}} \frac{\text{C}}{\text{V}}$

I : Type ... ATX—Thermostatic expansion valve for general use.

II : Model ... The first and the second digits indicate inlet and outlet pipe size respectively.
The last three digits indicate nominal capacity.

III : Connection ... B—Flare Nut Connection D—Solder Connection

IV : Refrigerant ... V = R410A


V : Charge type ... C = C-charge, CL = CL-charge

TYPE NUMBER SELECTION


Catalog No.					Capacity (U.S.R.T.){kW}		Connection			Wt. (kg)	
Type	Model	Connection	Refrigerant	Charge	CT38°C	ET5°C	Inlet	Outlet	Equalizer		
ATX-	34006	B (Flare) or D (Solder)	V (R410A)	C CL	1.10 {3.85}		3/8" {3/8"OD}	1/2" {1/2"OD}	1/4" Flare	1.2 (B) 1.1 [D]	
	34013				2.32 {8.14}						
	34023				3.98 {14.0}						
	34035				6.05 {21.3}						
	34045				7.77 {27.3}						
	57060	D (Solder)			10.7 {37.6}		5/8"OD or 7/8"ID	7/8"OD or 1-1/8"ID		1.3	
	57080				14.3 {50.3}						
	71110				19.6 {69.0}						
	71140				24.9 {87.4}						
	71160				28.6 {101}						
	12220				39.4 {139}		1"OD or 1-1/4"ID	1"OD or 1-1/4"ID			1.5
	12270				48.2 {170}						
	12330				58.6 {206}						
	12420				74.2 {261}						
	12500				89.2 {314}						

DIMENSIONS

Type ATX-B

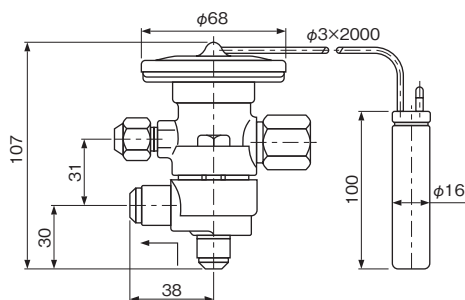

Type ATX-D


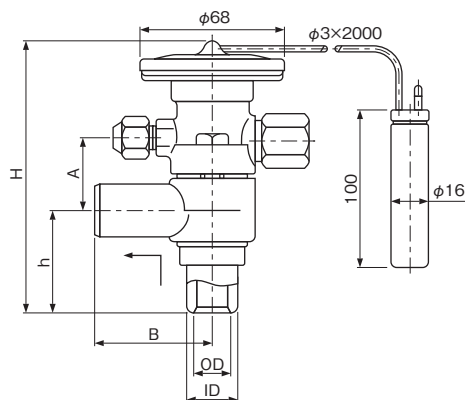


Type	H	h	A	B
ATX-34006D to 34045D	107	30	31	38
ATX-57060D to 71160D	132	52	34	51
ATX-12220D to 12500D	138	56	36	



ACCESSORY

• Sensing Bulb Mounting Band

For Type ATX-34006 to 71160

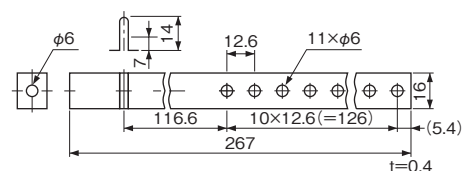


For Type ATX-12220 to 12500

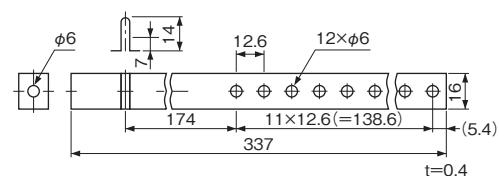

SYSTEM EXAMPLE

Heat Pump Chiller System

- In case of using ATX in heat pump circuits, sensing bulb and external equalizer shall be mounted at a position between 4way reversing valve and accumulator.

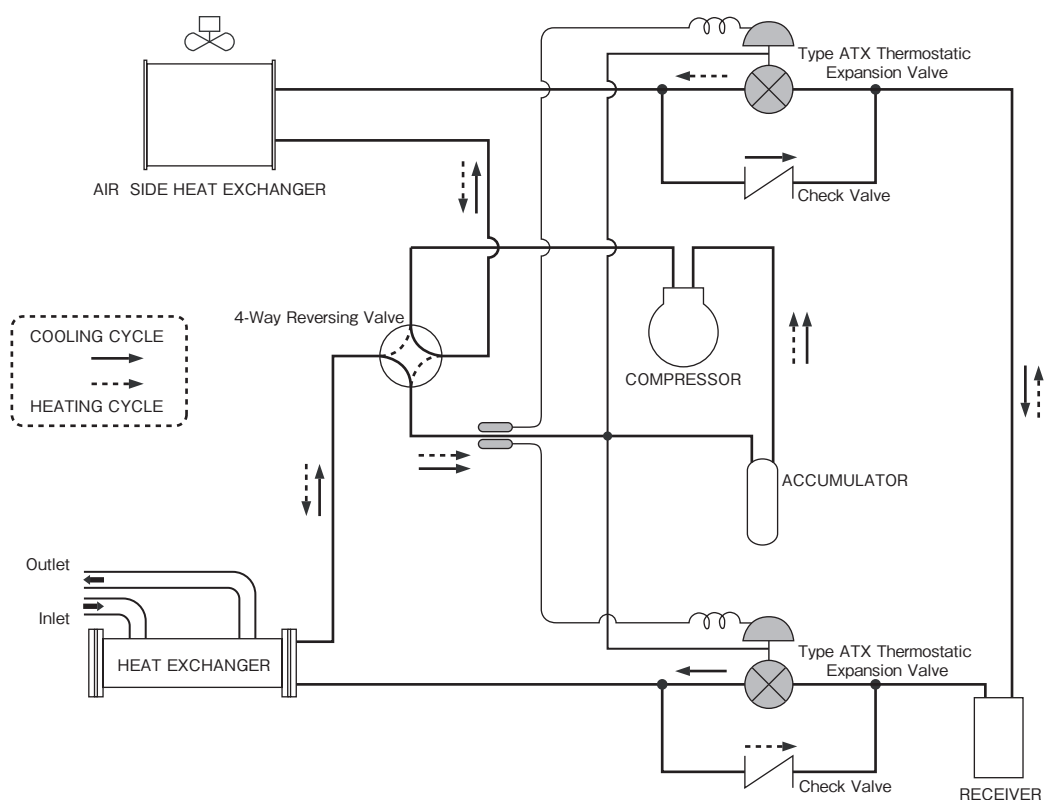

EXPANSION VALVES

Type ATX

SAGINOMIYA

GENERAL DESCRIPTION

- Application: General refrigeration and air conditioning system.
- In cases where the evaporation temperature is -20°C or lower, S-charge type is best suited for heat-pump air conditioners and unloading system attached devices.

SPECIFICATIONS

- Max. working pressure:
 2.8 MPa {28kgf/cm²} (S, SL, CY-charge)
 3.3 MPa {33kgf/cm²} (S-charge for R407C)
 1.4 MPa {14kgf/cm²} (G, L, C, CL-charge)
- Adjustable range of static superheat:
 3 to 13°C (G, L, CL-charge)
 0 to 13°C (CY-charge)
 0 to 8°C (S-charge)
 1 to 7°C (S, SL-charge for R404A)
- $\bigcirc$ Increase about 0.007MPa / rotation



Type ATX-B



Type ATX-D

VALVE NOMENCLATURE

Catalog No. is decided according to the specifications.

Example: $\frac{\text{ATX}}{\text{I}} - \frac{34006}{\text{II}} \frac{\text{B}}{\text{III}} \frac{\text{H}}{\text{IV}} \frac{\text{L}}{\text{V}}$

I : Type..... ATX-Thermostatic expansion valve for general use.

II : Model..... The first and second digits indicate inlet and outlet pipe size respectively.
 The last three digits indicate nominal capacity.

III : Connection..... B-Flare Nut Connection, D-Solder Connection

IV : Refrigerant..... M = R134a, H = R22, U = R404A, P = R407C

V : Charge type..... G = G-charge, L = L-charge, C = C-charge, CL = CL-charge, CY = CY-charge,
 S = S-charge, SL = SL-charge

TYPE NUMBER SELECTION

Catalog No.					Capacity (U.S.R.T.) {kW}					Connection			Capil. Tube Length (mm)	Wt. (kg)
Type	Model	Connection	Refrigerant	Charge	R22	R134a	R404A	R407C	R404A(SL)	Inlet	Outlet	Equalizer		
ATX-	34006	B (Flare)	M (R134a)	S (R134a)	1.0 {3.51}	0.7 {2.46}	0.7 {2.46}	1.0 {3.51}	0.3 {1.16}	3/8"	1/2"	1/4" Flare	$\phi 3 \times 1500$	1.2
	34013				2.1 {7.39}	1.6 {5.63}	1.5 {5.27}	2.2 {7.74}	0.8 {2.90}					
	34023		H (R22)	SL (R404A)	3.6 {12.7}	2.8 {9.85}	2.7 {9.49}	3.7 {13.0}	1.4 {4.78}					
	34035				5.5 {19.3}	4.2 {14.8}	4.0 {14.1}	5.7 {20.0}	2.0 {7.19}					
	34045		P (R407C)	G L C CL (R22)	7.0 {24.8}	5.4 {19.0}	5.1 {17.9}	7.2 {25.3}	2.6 {9.23}					

• Capacity: Based on condensing temp. 38°C and evaporating temp. 5°C. (-30°C for SL-charge).

TYPE NUMBER SELECTION

Catalog No.					Capacity (U.S.R.T.) {kW}					Connection			Capil. Tube Length (mm)	Wt. (kg)
Type	Model	Connection	Refrigerant	Charge	R22	R134a	R404A	R407C	R404A(SL)	Inlet	Outlet	Equalizer		
ATX-	34006	D (Solder)	M (R134a) H (R22) U (R404A) P (R407C)	S (R134a) R22 R404A R407C SL (R404A) G L C CL (R22)	1.0 {3.51}	0.7 {2.46}	0.7 {2.46}	1.0 {3.51}	0.3 {1.16}	3/8" OD	1/2" OD	1/4" Flare	$\phi 3 \times 1500$	1.1
	34013				2.1 {7.39}	1.6 {5.63}	1.5 {5.27}	2.2 {7.74}	0.8 {2.90}					
	34023				3.6 {12.7}	2.8 {9.85}	2.7 {9.49}	3.7 {13.0}	1.4 {4.78}					
	34035				5.5 {19.3}	4.2 {14.8}	4.0 {14.1}	5.7 {20.0}	2.0 {7.19}					
	34045				7.0 {24.8}	5.4 {19.0}	5.1 {17.9}	7.2 {25.3}	2.6 {9.23}					
	57060				9.7 {34.1}	7.2 {25.4}	6.8 {23.9}	10.0 {35.1}	3.7 {12.9}	5/8" OD or 7/8" ID	7/8" OD or 1-1/8" ID	1/4" Flare	$\phi 3 \times 2000$	1.3
	57080				13.0 {45.7}	9.6 {33.7}	9.1 {32.0}	13.4 {47.1}	4.9 {17.3}					
	71110				17.8 {62.6}	13.2 {46.4}	12.5 {44.0}	18.3 {64.3}	6.9 {24.4}					
	71140				22.6 {79.4}	16.8 {59.1}	16.0 {56.3}	23.3 {81.9}	8.7 {30.7}					
	71160				26.0 {91.6}	19.2 {67.5}	18.2 {64.0}	26.8 {94.2}	10.0 {35.0}					
	12220				35.8 {126}	26.4 {92.8}	25.1 {88.3}	36.9 {130}	13.7 {48.2}	1" OD or 1-1/4" ID	1" OD or 1-1/4" ID	1/4" Flare	$\phi 3 \times 3000$	1.5
	12270				43.5 {154}	32.4 {114}	30.8 {108}	44.8 {158}	16.9 {59.3}					
	12330				53.4 {187}	39.6 {140}	37.6 {132}	55.0 {193}	20.6 {72.4}					
	12420				67.6 {237}	50.4 {177}	47.9 {168}	69.6 {245}	27.6 {97.1}					
	12500				81.0 {285}	60.0 {211}	57.0 {200}	83.4 {293}	33.0 {116}					

• Capacity: Based on condensing temp. 38°C and evaporating temp. 5°C. (−30°C for SL-charge).


Extreme Low Temperature Model (− 70°C to − 40°C)

Catalog No.					Capacity (U.S.R.T.) {kW}	Connection			Capil. Tube Length (mm)	Wt. (kg)
Type	Model	Connection	Refrigerant	Charge	R22	Inlet	Outlet	Equalizer		
ATX-	34006	B (Flare) or D (Solder)	H (R22)	CY (Extreme Low)	1.39 {4.88}	3/8"OD	1/2"OD	1/4" Flare	ϕ 3 × 2000	1.2 (Flare)
	34013				3.21 {11.3}					
	34023				5.40 {19.0}					
	34035				7.56 {26.6}					
	34045				9.74 {34.3}					
	57060	11.3 {39.8}			5/8"OD or 7/8"ID	7/8"OD or 1-1/8"ID	1.3			
	57080	15.3 {53.7}								

• Capacity: Based on condensing temp. 40°C and evaporating temp. −60°C, sub-cooling 50°C.

DIMENSIONS


Type ATX-B

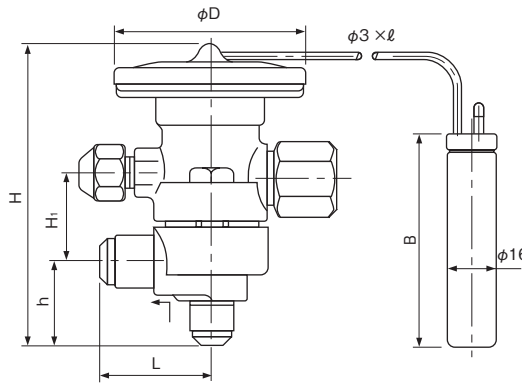

Catalog No.			Unit: mm							
Type	Model	Connection	L	H	H ₁	h	ϕD	ℓ	B	
ATX-	34006	B (Flare) or D (Solder)	38	107	31	30	64	1500	76	
	34013									
	34023									
	34035									
	34045									
	57060	D (Solder)	51	132	34	52	68	2000	100	
	57080									
	71110									
	71140									
	71160									
	12220									
	12270									
	12330									
	12420									
	12500									

• S,CY,SL-Charge : $\phi D=68, \ell=2000, B=100$

Type ATX-D

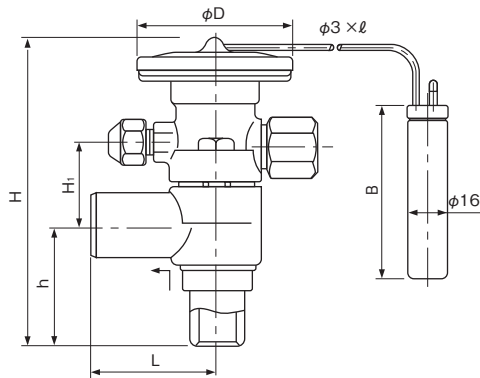


Unit: mm


ACCESSORY

• Sensing Bulb Mounting Band

For Type ATX-34006 to 71160

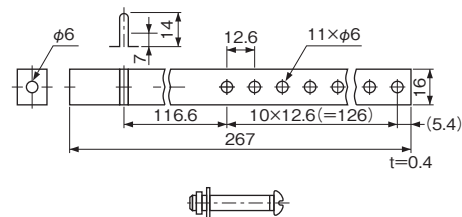

For Type ATX-12220 to 12500

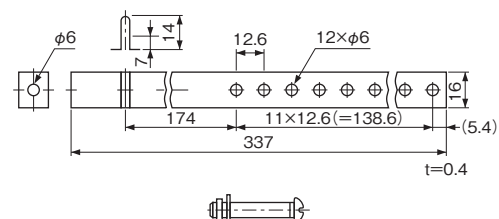

EXPANSION VALVES

High Volume OEM Item

Type AEX

SAGINOMIYA

GENERAL DESCRIPTION

- This product demonstrates excellent performance over a wide range of evaporation temperature.
- The AEX-Z type adopts a bellows seal mechanism and performs stable control even at extremely low temperatures.
- Application: Refrigerator, Freezer, Extreme low temperature warehouse and Refrigeration equipment for Ships.

SPECIFICATIONS

- Max. working pressure: 1.4MPa {14 kgf/cm²}
- Airtight test pressure: 1.6MPa{16 kgf/cm²}
- Body and sensing bulb Max. temperature: 80°C
- Adjustable range of static superheat: 0 ~ 20°C
- Increase about 0.05 MPa / rotation



Type AEX



Type AEX-Z

VALVE NOMENCLATURE

Catalog No. is decided according to the specifications.

Example: $\frac{\text{AEX}}{\text{I}} - \frac{2333}{\text{II}} \frac{\text{B}}{\text{III}} \frac{\text{H}}{\text{IV}} \frac{\text{Z}}{\text{V}}$

I : Type..... AEX—Thermostatic expansion valve for general use. (Internal equalizer type.)

II: Model..... The first and the second digits indicate inlet and outlet pipe size respectively.
The last two digits indicate nominal capacity.

III: Connection..... B—Flare Nut Connection

IV: Refrigerant..... H = R22, M=R134a, C=R23, U=R404A

V: Temperature class..... no representation = standard type, Z = Extreme Low Temperature type

Charge		Temperature class	Refrigerant	Evaporating Temp. (°C)	MOP (°C)	Temp. Condition
						Power Element Temp.: Ts Sensing Bulb Temp.: Tb
G	R22	standard	H	10~-40	13	Ts>Tb
	R134a		M	10~-30		
	R404A		U	10~-40		
	R22	Extreme Low Temperature	H	10~-70	-60	
	R23		C(R23)	-70~-100		
	R404A		U	10~-70	13	

G: Gas charge Type

TYPE NUMBER SELECTION (SPECIFICATIONS)


Catalog No.				Capacity (U.S.R.T.) {kW}				Connection		Wt. (kg)
Type	Model	Connection	Refrigerant	R22	R23	R134a	R404A	Inlet	Outlet	
AEX-	2333B	H (R22) M (R134a) C (R23) U (R404A)	No representation (standard) Z (Extreme Low Temperature)	0.50 {1.76}	Production possible	0.36 {1.27}	0.34 {1.20}	1/4"(3/8") Flare	3/8" Flare	0.95
	2335B			0.95 {3.34}		0.72 {2.53}	0.68 {2.39}		1/2" Flare	1.15
	2345B			1.40 {4.92}		1.10 {3.87}	1.05 {3.69}			
	2348B			1.90 {6.68}		1.50 {5.28}	1.40 {4.92}			
	2341B			3.70 {13.0}		2.60 {9.14}	2.50 {8.79}	3/8"(1/4") Flare		
	2342B			6.0 {21.1}		4.41 {15.5}	4.21 {14.8}	1/2" Flare	5/8" Flare	1.55
	2344B							5/8"(1/2") Flare	3/4" Flare	
	3454B									
	4564B									
	4566B			9.61 {33.8}		7.20 {25.3}	6.0 {21.1}	5/8"(1/2") Flare	3/4" Flare	
4568B	12.8 {45.0}	9.58 {33.7}	8.39 {29.5}							

• Capacity: Based on condensing temp. 38°C and evaporating temp. -5°C.


• If you need connection sizes in (), please specify first.

• H dimension of Z type is about 24 mm larger.

DIMENSIONS

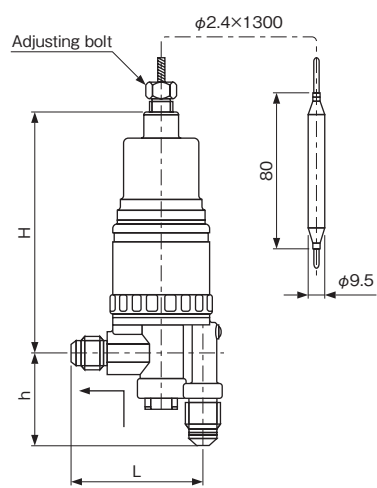

Type AEX

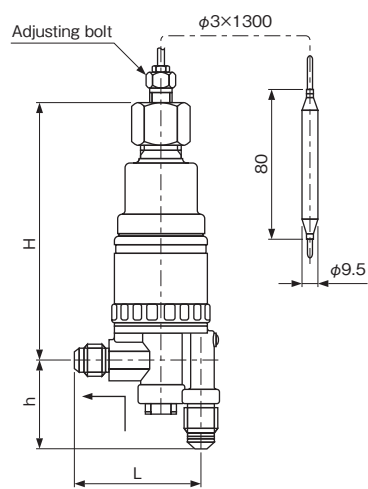

Type AEX-Z

Unit: mm

Catalog No.				L	H	h
Type	Model	Refrigerant	Evaporating Temp.			
AEX-	2333B	H (R22)	No representation (standard)	70.5	132	47 (46)
	2335B					
	2345B					
	2348B	M (R134a)	Z (Extreme Low Temperature)	73.5	133	46(47)
	2341B					
	2342B	C (R23)	81	135	48(49)	
	2344B					
	3454B	U (R404A)	84.5	136	52	
	4564B					
	4566B					
4568B						

ELECTRONIC EXPANSION VALVES

High Volume OEM Item

Type UKV, VKV & AKV

SAGINOMIYA

GENERAL DESCRIPTION

- Application: Wide range of air conditioning and refrigeration equipment
- Refrigerant: R22, R134a, R404A, R407C, R410A
- High cool down capability.
- Quick response.
- Less energy consumption.
- Bi-Flow capability.



Type UKV



Type AKV

SPECIFICATIONS

Max. working pressure: 4.2 MPa {42kgf/cm²}

Valve operating pulse range: 0 to 480 pulse, 1–2 phase excitation.

TYPE NUMBER SELECTION

Type UKV – High volume OEM item

Catalog No.	Port Size (φ mm)	Capacity (U.S.R.T.) {kW}					Connection (Solder) (mm)		Operating Pressure Differential B to A flow direction (MPa) {kgf/cm ² }	Valve shut press on, A to B flow direction (MPa) {kgf/cm ² }	Wt. (kg)
		R22	R134a	R404A	R407C	R410A	B side	A side			
UKV-08D	0.8	0.4 {1.5}	0.34 {1.2}	0.3 {1.1}	0.4 {1.6}	0.5 {1.8}	φ 6.35 OD	φ 6.35 OD	0 to 3.5 {0 to 35}	2.0 {20} or less	0.05
UKV-10D	1.0	0.7 {2.6}	0.58 {2.0}	0.5 {1.8}	0.8 {2.7}	0.9 {3.1}	φ 7.94 OD	φ 7.94 OD		3.5 {35} or less	
UKV-14D	1.4	1.6 {5.8}	1.28 {4.5}	1.2 {4.1}	1.7 {5.9}	1.9 {6.8}	φ 7.94 OD	φ 7.94 OD		2.0 {20} or less	
UKV-18D	1.8	2.9 {10.3}	2.3 {8.1}	2.1 {7.3}	3.0 {10.6}	3.4 {12.1}	φ 6.35 OD	φ 6.35 OD		2.8 {28} or less	
UKV-25D	2.5	5.6 {19.6}	4.4 {15.3}	3.9 {13.8}	5.7 {20.1}	6.5 {23.0}	φ 7.94 OD	φ 7.94 OD	0 to 2.8 {0 to 28}	2.2 {22} or less	
UKV-30D	3.0	7.6 {26.8}	6.0 {20.9}	5.4 {18.9}	7.8 {27.5}	9.0 {31.5}				1.5 {15} or less	
UKV-32D	3.2	8.2 {28.8}	6.4 {22.5}	5.8 {20.3}	8.4 {29.6}	9.6 {33.9}				1.2 {12} or less	
UKV-40D	4.0	11.1 {39.1}	8.7 {30.6}	7.9 {27.6}	11.4 {40.2}	13.1 {46.0}				0.7 {7} or less	

• Capacity: Based on CT = 38°C, ET = 5°C, SC = 0°C and SH = 0°C

• Please contact us if other capacity or connection are required.

Type VKV – Middle volume OEM item

Catalog No.	Port Size (φ mm)	Capacity (U.S.R.T.) {kW}					Connection (Solder) (mm)		Operating Pressure Differential B to A flow direction (MPa) {kgf/cm ² }	Valve shut press on, A to B flow direction (MPa) {kgf/cm ² }	Wt. (kg)
		R22	R134a	R404A	R407C	R410A	B side	A side			
VKV-14D	1.4	1.5 {5.2}	1.1 {4.0}	1.0 {3.6}	1.5 {5.3}	1.7 {6.1}	φ 7.94 OD	φ 7.94 OD	0 to 3.5 {0 to 35}	2.8 {28} or less	0.11
VKV-18D	1.8	2.9 {10.3}	2.3 {8.1}	2.1 {7.3}	3.0 {10.6}	3.4 {12.1}				2.4 {24} or less	
VKV-20D	2.0	3.5 {12.4}	2.7 {9.7}	2.5 {8.7}	3.6 {12.7}	4.1 {14.5}				2.4 {24} or less	0.13
VKV-25D	2.5	5.3 {18.5}	4.1 {14.5}	3.7 {13.1}	5.4 {19.0}	6.2 {21.8}				2.2 {22} or less	
VKV-30D	3.0	7.0 {24.7}	5.5 {19.3}	4.9 {17.4}	7.2 {25.4}	8.3 {29.1}	φ 9.52 OD	φ 12.7 OD	0 to 2.5 {0 to 25}	1.5 {15} or less	0.15
VKV-32D	3.2	8.2 {28.8}	6.4 {22.5}	5.8 {20.3}	8.4 {29.6}	9.6 {33.9}				1.0 {10} or less	
VKV-40D	4.0	13.2 {46.4}	10.3 {36.2}	9.3 {32.7}	13.5 {47.6}	15.5 {54.5}				0.3 {3} or less	0.16

• Capacity: Based on CT = 38°C, ET = 5°C, SC = 0°C and SH = 0°C

• Please contact us if valves for application of hot gas bypass are required.

Type AKV – Large capacity type

Catalog No.	Port Size (ϕ mm)	Capacity (U.S.R.T.) {kW}					Connection (Solder) (mm)		Operating Pressure Differential B to A flow direction (MPa) {kgf/cm ² }	Valve shut press on, A to B flow direction (MPa) {kgf/cm ² }	Wt. (kg)
		R22	R134a	R404A	R407C	R410A	B side	A side			
AKV-55D	5.5	23.7 {83.4}	18.5 {65.2}	16.7 {58.8}	24.4 {85.6}	27.9 {98.1}	ϕ 15.88 OD	ϕ 15.88 OD	0 to 2.3 {0 to 23}	0.5 {5} or less	0.4
AKV-65D	6.5	28.1 {98.9}	22.0 {77.3}	19.8 {69.8}	29.9 {105.2}	33.0 {116.2}					0.42


• Capacity: Based on CT = 38°C, ET = 5°C, SC = 0°C and SH = 0°C

Coil

Valve Type	Rated Voltage & Current	Wt.(kg)
Type UKV	12V DC...260mA/Phase	0.13
Type VKV	12V DC...380mA/Phase	0.15
Type AKV	12V DC...375mA/Phase	0.4


DIMENSIONS

Type UKV

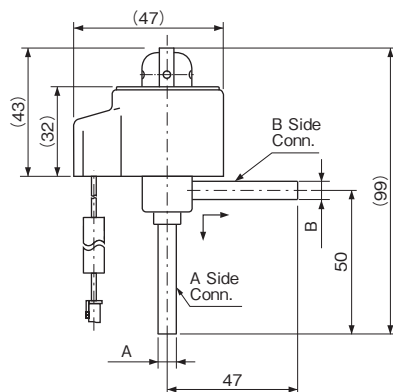

Catalog No.	A	B
UKV-08D	ϕ 6.35	
UKV-10D		ϕ 7.94
UKV-14D		ϕ 7.94
UKV-18D	ϕ 6.35	
UKV-25D		ϕ 7.94
UKV-30D		ϕ 7.94
UKV-32D		ϕ 7.94
UKV-40D		ϕ 7.94

Type VKV-14D to -32D

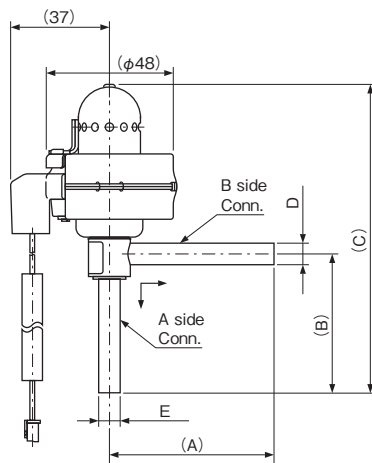


Catalog No.	A	B	C	D	E
VKV-14D					
VKV-18D					
VKV-20D	64	49	112		ϕ 7.94
VKV-25D					
VKV-30D					
VKV-32D	66	64	130	ϕ 9.52	ϕ 12.7

Unit: mm


DIMENSIONS

Type VKV-40D

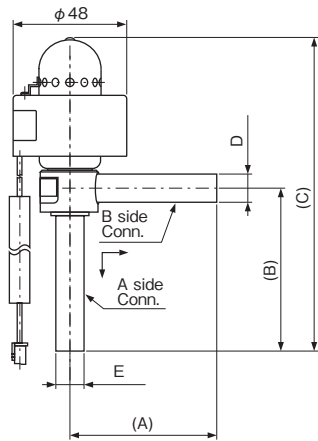

Catalog No.	A	B	C	D	E
VKV-40D	66	68	136	$\phi 12.7$	$\phi 12.7$

Type AKV

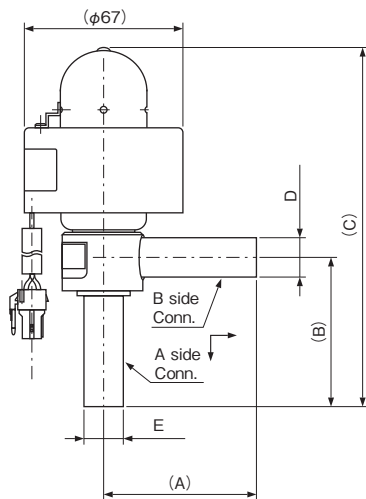

Catalog No.	A	B	C	D	E
AKV-55D	64.5	65.5	150	$\phi 15.88$	
AKV-65D					

Unit: mm

ELECTRONIC EXPANSION VALVES

High Volume OEM Item

Type UKV-F

SAGInoMIYA

GENERAL DESCRIPTION

- Application: Residential air conditioner, etc.
- Refrigerant: R22, R134a, R404A, R407C, R410A
- With internal check valve function.
- High cool down capability.
- Quick response.
- Less energy consumption.



Type UKV-F

SPECIFICATIONS

Max. working pressure: 4.2 MPa {42kgf/cm²}

Valve operating pulse range: 0 to 500 pulse, 1-2 phase excitation.

TYPE NUMBER SELECTION

Type UKV-F – With internal check valve function


Catalog No.	Port Size (ϕ mm)	Capacity (U.S.R.T.) {kW}					Connection (Solder) (mm)		Operating Pressure Differential (MPa) {kgf/cm ² }		Cv Value Flow Direction A to B Full opening position	Wt. (kg)
		R22	R134a	R404A	R407C	R410A	B side	A side	B to A	A to B		
UKV-F19D	1.9	2.9 {10.3}	2.3 {8.1}	2.1 {7.3}	3.0 {10.6}	3.4 {12.1}	ϕ 7.94 OD	ϕ 7.94 OD	0 to 3.3 {0 to 33}	N/A	0.47	0.05
UKV-F25D	2.5	4.7 {16.5}	3.7 {12.9}	3.3 {11.6}	4.8 {16.9}	5.5 {19.4}						

• Capacity: Based on CT = 38°C, ET = 5°C, SC = 0°C and SH = 0°C

Coil

Rated Voltage & Current	Wt.(kg)
12V DC...260mA/Phase	0.13

DIMENSIONS

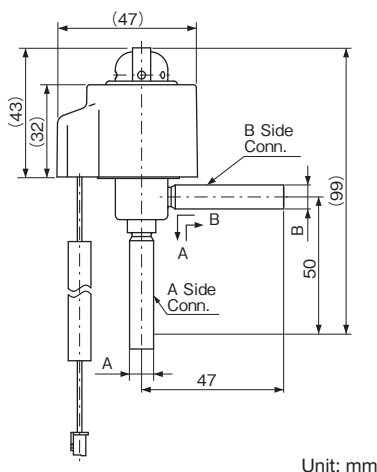


Unit: mm

B → A: Flow when the valve works as an expansion valve.
A → B: Flow when the valve works as a tube.

Catalog No.	A	B
UKV-F19D	ϕ 7.94	
UKV-F25D		

APPLICATION EXAMPLE

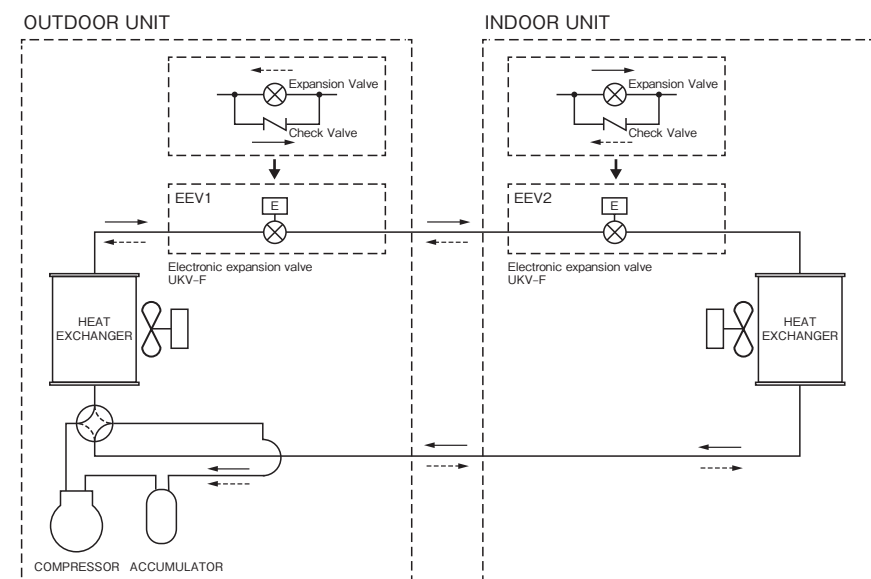

COOLING CYCLE

→

HEATING CYCLE

→

COOLING CYCLE

EEV1: Flow when the valve works as a tube.

EEV2: Flow when the valve works as an expansion valve.

HEATING CYCLE

EEV1: Flow when the valve works as an expansion valve

EEV2: Flow when the valve works as a tube.

PULSE CONVERTERS

Type LNE

SAGInoMIYA


GENERAL DESCRIPTION

- Can be used for all types of VKV, PKV, and AKV electronic expansion valves.
- Current input is converted to driving pulse output to electronic expansion valve with the pulse converter.
- Convert 4 to 20mA. DC input to 0 to 480 pulse output.


Input	Start up input	No voltage contact signal
	Current input	4 to 20mA. DC
Output	0 to 480 pulse	For VKV, PKV & AKV
Sampling time		0.1, 1, 5, and 10 sec.



WIRING

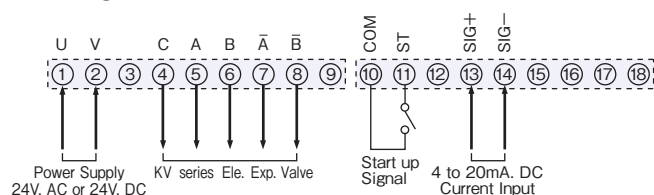

DIMENSIONS (Type: LNE-ZN20-020)

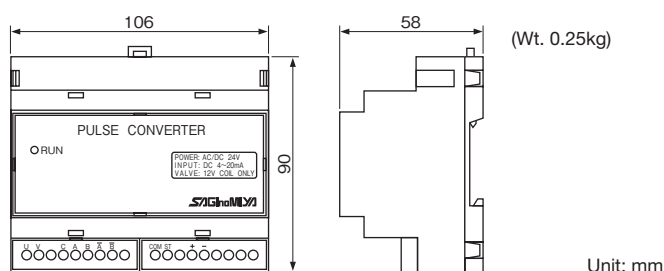

SOLENOID VALVES & CONTROL VALVES

SOLENOID VALVES FOR REFRIGERANT	77
Type TEV & VPV	
SOLENOID VALVES FOR REFRIGERANT	78–79
Type SEV	
SOLENOID VALVES FOR REFRIGERANT	80–81
Type RPV	
SOLENOID VALVES FOR REFRIGERANT	82–84
Type REV & UEV	
SOLENOID VALVES FOR WATER	85
Type WEV	
BI-FLOW SOLENOID VALVES	86
Type BPV	
3-WAY SOLENOID VALVES	87
Type IEV	
4-WAY REVERSING VALVES	88–90
Type STF	
MOTORIZED BALL VALVES	91–92
Type MJV	
DAMPER & VALVE MOTOR ACTUATORS	93–94
Type EGK & WGK	
2-WAY & 3-WAY CONTROL VALVES	95–97
Type NVK	

SOLENOID VALVES FOR REFRIGERANT

High Volume OEM Item

Type TEV & VPV

SAGINOMIYA

GENERAL DESCRIPTION

- Direct-operated, pilot operated, 2-way, normally closed valve. Normally open type is available.
- For use with non-corrosive refrigerant.
- Compactly designed for use in small appliances produced in quantity such as room air conditioners, dehumidifiers and ice making machines.
- Various piping configuration available.



Type VPV



Type TEV

SPECIFICATIONS

- Fluid temperature: -30 to 120°C
- Ambient temperature: -30 to 50°C

TYPE NUMBER SELECTION

Unit: MPa {kgf/cm²}

Catalog No.	Port Size (mm)	Cv Value	* Nominal Capacity (U.S.R.T.) {kW}				Connection		O.P.D.		Max. Working Pressure	Operation	Wt. (kg)		
			R410A	R134a	R404A	R22	Copper Tube O.D.	Style	Min.	Max.					
TEV-S1220D	1.2	0.037	0.2 {0.6}	0.1 {0.5}	0.1 {0.4}	0.2 {0.6}	1/4"	Solder	0	3.6 {36.7}	4.3 {43.8}	Normal Close	0.025		
TEV-S1620D	1.6	0.07	0.3 {1.0}	0.3 {1.0}	0.2 {0.7}	0.3 {1.1}				2.75 {28}					
TEV-S1920D	1.9	0.1	0.4 {1.5}	0.4 {1.5}	0.3 {1.0}	0.5 {1.6}			0	2.06 {21}		Normal Open	0.06		
VPV-L202D	1.8	0.06	0.3 {1.0}	0.3 {1.0}	0.2 {0.7}	0.3 {1.1}	1/4"			3.6 {36.7}				Normal Close	0.08
VPV-603D	5.8	0.65	2.8 {9.7}	2.7 {9.6}	1.9 {6.7}	2.9 {10.3}	5/16"		0.005 {0.05}	2.75 {28}		0.14			
VPV-803DQ50	7.8	1.5	6.4 {22.4}	6.3 {22.2}	4.4 {15.4}	6.8 {23.8}	3/8"		0.01 {0.1}				0.26		
VPV-1204DQ50	11.0	3.0	12.7 {44.8}	12.6 {44.4}	8.8 {30.9}	13.5 {47.6}	1/2"		0.015 {0.15}						

• O.P.D.: Operating Pressure Differential (by air pressure)

* Nominal capacities are based on ΔP = 0.015MPa, condensing temp. = 38°C and evaporating temp. = 5°C




ELECTRICAL RATING OF SOLENOID COILS

Type	Rated Voltage		Tolerance (%)	Voltampere		Power Consumption (W)	Insulation Class	Wt. (kg)
				Running	Inrush			
TEV	24V. AC 100V. AC 110V. AC 120V. AC	50/60Hz	±10	9/7	22/16	4.5/3.5	* Class B Molded	0.1
VPV	208V. AC 220V. AC 230V. AC 240V. AC			13/10	36/30	8/7		0.14

Current (A) = Voltampere / Rated Voltage

* IEC compliance

DIMENSIONS

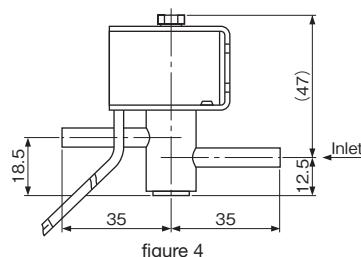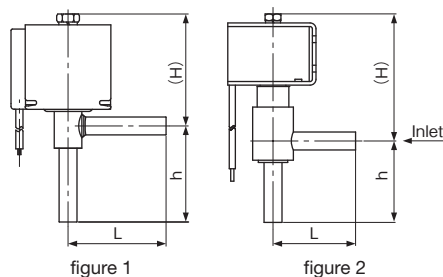

Catalog No.		Unit: mm				Form
		L	H	h	l	
TEV-	S1220D	35	40	33	—	figure 1
	S1620D					
	S1920D					
VPV-	603D	36.5	55	36	—	figure 2
	803DQ50	41.5	53.5	38.5	22.5	figure 3
	1204DQ50	61.5	57.5	61.5	28.5	
	L202D	—	—	—	—	figure 4

Unit: mm

SOLENOID VALVES FOR REFRIGERANT

Type SEV

SAGINOMIYA

GENERAL DESCRIPTION

- Pilot operated, 2-way, normally closed valve.
- For non-corrosive refrigerant (liquid or gas) in refrigeration units. Also available for air application.
- Can operate under no pressure difference. (SEV-303, 502 and 603)
- Can install horizontally and vertically. (Coil should be located above the axis of pipe line.)



Type SEV-B



Type SEV-D

TYPE NUMBER SELECTION

Unit: MPa {kgf/cm²}

Catalog No.	Port Size (mm)	Cv Value	* Nominal Capacity (U.S.R.T.) {kw}				Connection		O.P.D.		Max. Working Pressure	Body Test Press.	Fluid Temp. (°C)	Ambient Temp. (°C)	Wt. (kg)
			R410A	R134a	R404A	R22	Copper Tube O.D.	Style	Min.	Max.					
SEV-303BXF	3	0.25	2.25 {7.91}	1.05 {3.7}	0.73 {2.57}	1.13 {3.97}	3/8"	Flare	0	2.45 {25} for AC	X: 2.94 {30}	X: 4.41 {45}	-40 to 125	-30 to 50	0.4
SEV-502BXF	5	0.51	3.5 {12.4}	2.2 {7.6}	1.5 {5.2}	2.3 {8.1}	1/4"								
SEV-502BYF	5	0.51	3.5 {12.4}	2.2 {7.6}	1.5 {5.2}	2.3 {8.1}	1/4"								
SEV-603BXF	6	0.80	8.5 {29.8}	3.4 {11.8}	2.3 {8.2}	3.6 {12.7}	3/8"								
SEV-603BYF	6	0.80	8.5 {29.8}	3.4 {11.8}	2.3 {8.2}	3.6 {12.7}	3/8"								
SEV-1004BXF	10	1.75	14.8 {52.2}	7.4 {25.9}	5.1 {18.0}	7.9 {27.8}	1/2"	Solder	0	1.96 {20} for DC	Y: 4.2 {42}	Y: 6.3 {63}	-40 to 125	-30 to 50	0.7
SEV-1004BYF	10	1.75	14.8 {52.2}	7.4 {25.9}	5.1 {18.0}	7.9 {27.8}	1/2"								
SEV-1205BXF	12	2.9	22.5 {79.1}	12.2 {42.9}	8.5 {29.8}	13.1 {46.0}	5/8"								
SEV-1205BYF	12	2.9	22.5 {79.1}	12.2 {42.9}	8.5 {29.8}	13.1 {46.0}	5/8"								
SEV-1506BXF	15	4.5	19.1 {67.2}	18.9 {66.6}	13.2 {46.3}	20.3 {71.4}	3/4"								
SEV-1506BYF	15	4.5	19.1 {67.2}	18.9 {66.6}	13.2 {46.3}	20.3 {71.4}	3/4"	Solder	0	1.96 {20} for DC	Y: 4.2 {42}	Y: 6.3 {63}	-40 to 125	-30 to 50	1.4
SEV-502DXF	5	0.53	2.2 {7.9}	2.2 {7.9}	1.5 {5.5}	2.4 {8.4}	1/4"								
SEV-502DYF	5	0.53	2.2 {7.9}	2.2 {7.9}	1.5 {5.5}	2.4 {8.4}	1/4"								
SEV-603DXF	6	0.83	3.5 {12.4}	3.5 {12.3}	2.4 {8.5}	3.8 {13.2}	3/8"								
SEV-603DYF	6	0.83	3.5 {12.4}	3.5 {12.3}	2.4 {8.5}	3.8 {13.2}	3/8"								
SEV-1004DXF	10	2.0	8.5 {29.8}	8.4 {29.6}	5.9 {20.6}	9.0 {31.7}	1/2"	Solder	0.007 {0.07}	1.96 {20} for DC	Y: 4.2 {42}	Y: 6.3 {63}	-40 to 125	-30 to 50	0.3
SEV-1004DYF	10	2.0	8.5 {29.8}	8.4 {29.6}	5.9 {20.6}	9.0 {31.7}	1/2"								
SEV-1205DXF	12	3.5	14.8 {52.2}	14.7 {51.8}	10.2 {36.0}	15.8 {55.5}	5/8"								
SEV-1205DYF	12	3.5	14.8 {52.2}	14.7 {51.8}	10.2 {36.0}	15.8 {55.5}	5/8"								
SEV-1506DXF	15	5.3	22.5 {79.1}	22.3 {78.5}	15.5 {54.5}	23.9 {84.1}	3/4"								
SEV-1506DYF	15	5.3	22.5 {79.1}	22.3 {78.5}	15.5 {54.5}	23.9 {84.1}	3/4"								

* Nominal capacities are based on $\Delta P = 0.015$ MPa, condensing temp. = 38°C and evaporating temp. = 5°C, Supercool temp. = 0°C

• Weight includes a coil

• Enclosure IP34 (SEV-W:Drip proof model)

ELECTRICAL RATING OF SOLENOID COILS


Rated Voltage		Tolerance (%)	Voltampere (VA)		Power Consumption (W)	* Insulation Class
			Running	Inrush		
24V.AC, 100V.AC, 110V.AC 200V.AC, 220V.AC, 240V.AC	50/60Hz	±10	15/11	45/33	7/6	Class B Molded
12V. DC, 24V. DC, 100V. DC	—		—	—	10	

Current (A) = Voltampere / Rated Voltage


* IEC compliance

DIMENSIONS

Type SEV-D

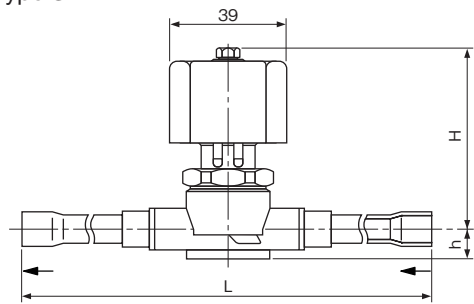

Type SEV-B

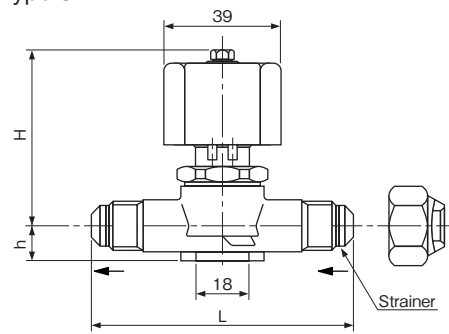

Unit: mm

Catalog No.		Unit: mm		
		L	H	h
SEV-	303B	85	58	11.5
	502B			
	603B			
	1004B	105	85	20.5
	1205B	115	88	22
	1506B	135	95	25
	502D	270	58	10.5
	603D			
	1004D			
	1205D	180	88	22
	1506D	190	95	25

SOLENOID VALVES FOR REFRIGERANT

Type RPV


SAGINOMIYA

GENERAL DESCRIPTION

- New solenoid valves for refrigerant "High-pressure R410A standard"
- Various product line up (Body: 21 types, Coil: DIN plug type, Lead wire type)
- Low power consumption (6W at 50Hz / 4.5W at 60Hz)

SPECIFICATIONS

- Body test pressure: 6.5MPa (66.2kgf/cm²)
- Fluid temperature: -40 to 125°C
- Ambient temperature: -30 to 50°C

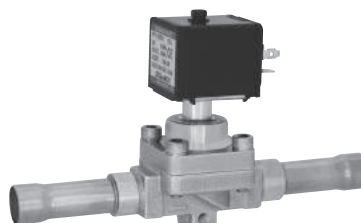

Type RPV-D



Type RPV-B

TYPE NUMBER SELECTION

Unit: MPa {kgf/cm²}

Catalog No.	Port Size (mm)	Cv Value	Nominal Capacity (U.S.R.T.) {kW}				Connection		O.P.D.		Max. Working Pressure	Wt. (kg)
			R410A	R134a	R404A	R22	Copper Tube O.D.	Style	Min.	Max.		
RPV-302BYF	3	0.27	1.1 {4.0}	1.1 {4.0}	0.8 {2.8}	1.2 {4.3}	1/4"	Flare	0	3.6 {36.7}	4.3 {43.8}	0.3
RPV-303BYF		0.30	1.3 {4.5}	1.3 {4.4}	0.9 {3.1}	1.4 {4.8}	3/8"					0.3
RPV-602BYF	6	0.60	2.5 {9.0}	2.5 {8.9}	1.8 {6.2}	2.7 {9.5}	1/4"		0.4			
RPV-603BYF		0.90	3.8 {13.4}	3.8 {13.3}	2.6 {9.3}	4.0 {14.0}	3/8"		0.4			
RPV-803BYF	8	1.2	5.1 {17.9}	5.1 {17.8}	3.5 {12.3}	5.4 {19.0}	3/8"		0.45			
RPV-804BYF		1.4	5.9 {20.9}	5.9 {20.7}	4.1 {14.4}	6.3 {22.0}	1/2"		0.45			
RPV-1004BYF	10	2.4	10.2 {35.8}	10.1 {35.5}	7.0 {24.7}	10.8 {38.0}	1/2"		0.6			
RPV-1005BYF		2.4	10.2 {35.8}	10.1 {35.5}	7.0 {24.7}	10.8 {38.0}	5/8"		0.6			
RPV-1205BYF	12	3.6	15.3 {53.7}	15.2 {53.3}	10.5 {37.0}	16.2 {57.0}	5/8"		0.7			
RPV-1606BYF	16	5.6	23.8 {83.6}	23.6 {82.9}	16.4 {57.6}	25.3 {89.0}	3/4"		1.1			
RPV-302DYF	3	0.27	1.1 {4.0}	1.1 {4.0}	0.8 {2.8}	1.2 {4.3}	1/4"	Solder	0	3.6 {36.7}	4.3 {43.8}	0.3
RPV-303DYF		0.30	1.3 {4.5}	1.3 {4.4}	0.9 {3.1}	1.4 {4.8}	3/8"					0.3
RPV-602DYF	6	0.60	2.5 {9.0}	2.5 {8.9}	1.8 {6.2}	2.7 {9.5}	1/4"		0.4			
RPV-603DYF		0.90	3.8 {13.4}	3.8 {13.3}	2.6 {9.3}	4.0 {14.0}	3/8"		0.4			
RPV-803DYF	8	1.2	5.1 {17.9}	5.1 {17.8}	3.5 {12.3}	5.4 {19.0}	3/8"		0.4			
RPV-804DYF		1.4	5.9 {20.9}	5.9 {20.7}	4.1 {14.4}	6.3 {22.0}	1/2"		0.4			
RPV-1004DYF	10	2.4	10.2 {35.8}	10.1 {35.5}	7.0 {24.7}	10.8 {38.0}	1/2"		0.6			
RPV-1005DYF		2.4	10.2 {35.8}	10.1 {35.5}	7.0 {24.7}	10.8 {38.0}	5/8"		0.6			
RPV-1205DYF	12	3.6	15.3 {53.7}	15.2 {53.3}	10.5 {37.0}	16.2 {57.0}	5/8"		0.7			
RPV-1606DYF	16	5.6	23.8 {83.6}	23.6 {82.9}	16.4 {57.6}	25.3 {89.0}	3/4"		1.1			
RPV-1607DYF		5.6	23.8 {83.6}	23.6 {82.9}	16.4 {57.6}	25.3 {89.0}	7/8"	1.1				

- Enclosure Lead wire direct: IP67 / DIN: IP65 (When DIN socket is used)
- Nominal capacities (R410A) are based on ΔP = 0.015 MPa, condensing temp. = 38°C and evaporating temp. = 5°C
- Weight includes a coil (Without Strainer, Flare nuts, Bracket).

ELECTRICAL RATING OF SOLENOID COILS

Rated Voltage		Tolerance (%)	Voltampere (VA)		Power Consumption (W)	*1 Insulation Class	Coil Style	
			Running	Inrush			Lead wire	DIN plug *2
24V.AC	50/60Hz	±10	12.5/9.5	45/44	6/4.5	Class B Molded	○	○
100V.AC								
200V.AC *3								
220V.AC *4								
230V.AC *5								
240V.AC *6								

*1 IEC compliance.


*2 EN 175301-803 (DIN 43650) / ISO 4400

For *3 to *6, please refer to the following


In case of the following voltage and frequency	Voltampere (VA)	Power Consumption (W)
	Running	
* 3 200 to 208V. AC (60Hz)	9.5 to 11	4.5 to 5
* 4 220 to 230V. AC (60Hz)		
* 5 220 to 230V. AC (50Hz)	10.5 to 12.5	5.2 to 6
* 5 230 to 240V. AC (60Hz)	9.5 to 11	4.5 to 5
* 6 230 to 240V. AC (50Hz)	10.5 to 12.5	5.2 to 6

DIMENSIONS


Type RPV-302BYF, 303BYF



Type RPV-602BYF to 804BYF

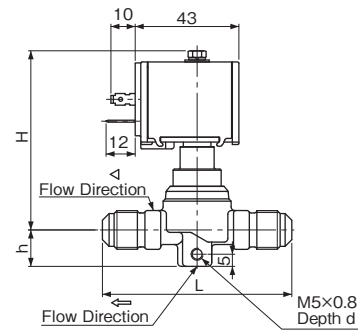


Type RPV-1004BYF to 1606BYF

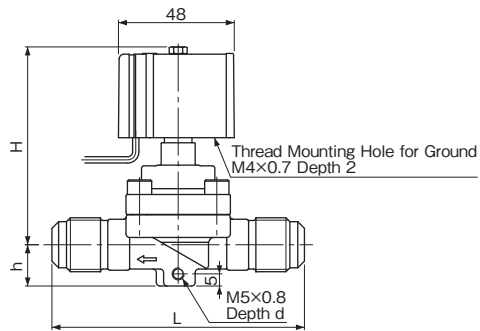


Catalog No.	Unit: mm			
	L	H	h	d
RPV-302BYF	64	67	12.5	12
RPV-303BYF	68	67	12.5	12
RPV-602BYF	71	74	15	12
RPV-603BYF	78	74	15	12
RPV-803BYF	84	75.5	15	14
RPV-804BYF	90	75.5	15	14
RPV-1004BYF	96	77	15.5	17
RPV-1005BYF	101	77	15.5	17
RPV-1205BYF	104	82	17	20
RPV-1606BYF	124	89	19	24


Type RPV-302DYF, 303DYF

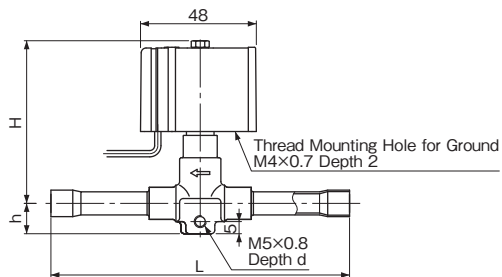

Type RPV-602DYF to 804DYF

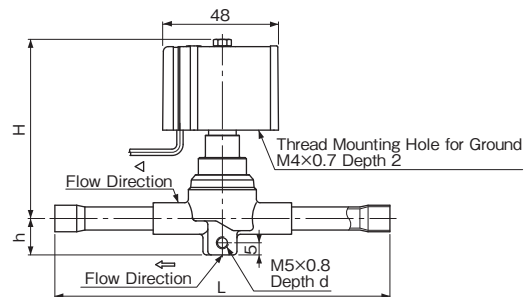

Type RPV-1004DYF to 1607DYF

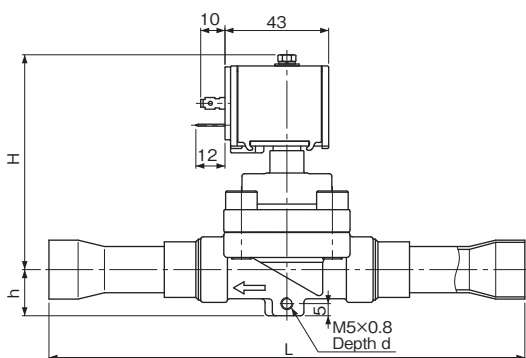


Catalog No.	Unit: mm			
	L	H	h	d
RPV-302DYF	123	67	12.5	12
RPV-303DYF	123	67	12.5	12
RPV-602DYF	140	74	15	12
RPV-603DYF	138	74	15	12
RPV-803DYF	141	75.5	15	14
RPV-804DYF	139	75.5	15	14
RPV-1004DYF	158	77	15.5	17
RPV-1005DYF	168	77	15.5	17
RPV-1205DYF	171	82	17	20
RPV-1606DYF	196	89	19	24
RPV-1607DYF	196	89	19	24

Unit: mm

OPTIONAL PARTS

DIN socket for DIN plug coil
Flare Nut

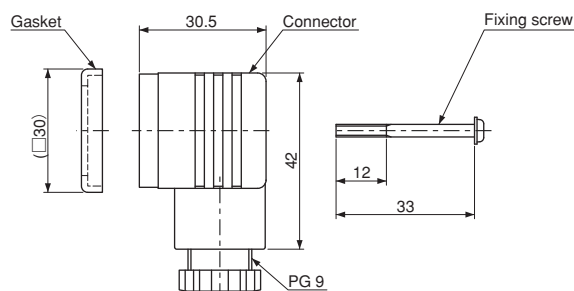

SOLENOID VALVES FOR REFRIGERANT

Type REV & UEV


SAGInoMIYA

GENERAL DESCRIPTION

- Type REV: Pilot operated, 2-way, Normally closed valve.
Type UEV: Pilot operated, 2-way, Normally opened valve.
- For non-corrosive refrigerant (liquid or gas) in refrigeration, cooling, air conditioning systems.
- "Double plunger" construction provides reliable On/Off action.
- Compact molded coil commonly fits all valve sizes.
- Operates in any position ... can be conveniently located in horizontal or vertical line with coil on top.
- Manual Opening Stem ... On Flange connection models, supplied as standard. On Flare or Solder connection models, supplied upon request.



Type UEV-D

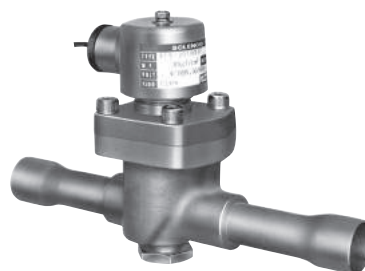

Type REV-D

SPECIFICATIONS

- Fluid temperature: -40 to 125°C (Type REV)
-40 to 120°C (Type UEV)
- Ambient temperature: -30 to 40°C

TYPE NUMBER SELECTION

Type REV – Normally closed valve (1)

Unit: MPa {kgf/cm²}

Catalog No.	Port Size (mm)	Cv Value	Nominal Capacity (U.S.R.T.) {kw}				Connection			O.P.D.		Max. Working Pressure	Wt. (kg)
			R410A	R134a	R404A	R22	Copper Tube O.D.	Steel Tube O.D.	Style	Min.	Max.		
REV-703BXF	7	1.0	4.2 {14.9}	4.2 {14.8}	2.9 {10.3}	4.6 {16}	3/8"		Flare				0.6
REV-1004BXF	10	2.0	8.5 {29.8}	8.4 {29.6}	5.9 {20.6}	9.1 {32}	1/2"						0.9
REV-1205BXF	12	3.5	14.9 {52.2}	14.7 {51.8}	10.2 {36}	15.9 {56}	5/8"						1.1
REV-1506BXF	15	5.3	22.5 {79.1}	22.3 {78.5}	15.5 {54.5}	23.9 {84}	3/4"						1.5
REV-1003GXF	10	2.0	8.5 {29.8}	8.4 {29.6}	5.9 {20.6}	9.1 {32}	3/8"		Rc				1.0
REV-1204GXF	12	3.5	14.9 {52.2}	14.7 {51.8}	10.2 {36}	15.9 {56}	1/2"						1.3
REV-1506GXF	15	5.3	22.5 {79.1}	22.3 {78.5}	15.5 {54.5}	23.9 {84}	3/4"						1.7
REV-703DXF	7	1.0	4.2 {14.9}	4.2 {14.8}	2.9 {10.3}	4.6 {16}	3/8"		Solder				0.5
REV-1004DXF	10	2.0	8.5 {29.8}	8.4 {29.6}	5.9 {20.6}	9.1 {32}	1/2"						0.8
REV-1205DXF	12	3.5	14.9 {52.2}	14.7 {51.8}	10.2 {36}	15.9 {56}	5/8"						0.9
REV-1506DXF	15	5.3	22.5 {79.1}	22.3 {78.5}	15.5 {54.5}	23.9 {84}	3/4"						1.1
REV-2007DXF							7/8"						
REV-2010DXF	20	9.0	38.2 {134.3}	37.9 {133.2}	26.3 {92.6}	40.7 {143}	1"						1.6
REV-2011DXF							1-1/8"						
REV-2511DXF							1-1/8"						
REV-2512DXF	25	13.8	—	58.1 {204.3}	40.4 {141.9}	62.3 {219}	1-1/4"			0.007 {0.07}	2.45 {25}	2.94 {30}	2.2
REV-2513DXF							1-3/8"						
REV-3213DXF							1-3/8"						
REV-3214DXF	32	19.4	—	81.7 {287.2}	56.7 {199.5}	87.6 {308}	1-1/2"						3.2
REV-3215DXF							1-5/8"						
REV-2006EXF	20	9.0	38.2 {134.3}	37.9 {133.2}	26.3 {92.6}	40.7 {143}	7/8"	1-1/8"	Flange				5.1
REV-2510EXF	25	13.8		58.1 {204.3}	40.4 {141.9}	62.3 {219}	1"	1-1/2"					7.7
REV-3212EXF	32	19.4		81.7 {287.2}	56.7 {199.5}	87.6 {308}	1-1/4"	1-5/8"					8.9
REV-4014EXF	40	32.0		134.7 {473.7}	93.6 {329.1}	144.5 {508}	1-1/2"	2"					10.8
REV-5020EXF	50	45.0		189.5 {666.2}	131.6 {462.9}	165.8 {583}	2"	2-1/2"					16.3
REV-6524EXF							2-1/2"	3"					23.2
REV-6530EXF	65	74.0		311.6 {1095.5}	216.5 {761.1}	272.7 {959}	3"	3-1/2"					26.6

- Weight includes a coil.
- Enclosure IP34 (REV-W: Drip proof model)
- Nominal capacities (R410A) are based on $\Delta P = 0.015$ MPa, condensing temp. = 38°C and evaporating temp. = 5°C

TYPE NUMBER SELECTION

Type REV – Normally closed valve (2)

Unit: MPa {kgf/cm²}

Catalog No.	Port Size (mm)	Cv Value	Nominal Capacity (U.S.R.T.) (kw)				Connection		O.P.D.		Max. Working Pressure	Wt. (kg)			
			R410A	R134a	R404A	R22	Copper Tube O.D.	Style	Min.	Max.					
REV-703BYF	7	1.0	4.2 {14.9}	4.2 {14.8}	2.9 {10.3}	4.6 {16}	3/8"	Flare	0.007 {0.07}	2.45 {25}	4.2 {42}	0.6			
REV-1004BYF	10	2.0	8.5 {29.8}	8.4 {29.6}	5.9 {20.6}	9.1 {32}	1/2"					0.9			
REV-1205BYF	12	3.5	14.9 {52.2}	14.7 {51.8}	10.2 {36}	15.9 {56}	5/8"					1.1			
REV-1506BYF	15	5.3	22.5 {79.1}	22.3 {78.5}	15.5 {54.5}	23.9 {84}	3/4"					1.5			
REV-1003GYF	10	2.0	8.5 {29.8}	8.4 {29.6}	5.9 {20.6}	9.1 {32}	3/8"	Rc				0.007 {0.07}	2.45 {25}	4.2 {42}	1.0
REV-1204GYF	12	3.5	14.9 {52.2}	14.7 {51.8}	10.2 {36}	15.9 {56}	1/2"								1.3
REV-1506GYF	15	5.3	22.5 {79.1}	22.3 {78.5}	15.5 {54.5}	23.9 {84}	3/4"								1.7
REV-703DYF	7	1.0	4.2 {14.9}	4.2 {14.8}	2.9 {10.3}	4.6 {16}	3/8"	Solder							0.5
REV-1004DYF	10	2.0	8.5 {29.8}	8.4 {29.6}	5.9 {20.6}	9.1 {32}	1/2"								0.8
REV-1205DYF	12	3.5	14.9 {52.2}	14.7 {51.8}	10.2 {36}	15.9 {56}	5/8"								0.9
REV-1506DYF	15	5.3	22.5 {79.1}	22.3 {78.5}	15.5 {54.5}	23.9 {84}	3/4"								1.1
REV-2007DYF	20	9.0	38.2 {134.3}	37.9 {133.2}	26.3 {92.6}	40.7 {143}	7/8"								1.6
REV-2010DYF							1"								
REV-2011DYF							1-1/8"								

- Weight includes a coil.
- Enclosure IP34 (REV-W: Drip proof model)
- Nominal capacities (R410A) are based on $\Delta P = 0.015$ MPa, condensing temp. = 38°C and evaporating temp. = 5°C

TYPE NUMBER SELECTION

Type UEV – Normally opened valve

Unit: MPa {kgf/cm²}

Catalog No.	Port Size (mm)	Cv Value	Nominal Capacity (U.S.R.T.) (kw)				Connection		O.P.D.		Max. Working Pressure	Wt. (kg)			
			R410A	R134a	R404A	R22	Copper Tube O.D.	Style	Min.	Max.					
UEV-1004BXF	10	2.0	8.5 {29.8}	8.4 {29.6}	5.9 {20.6}	9.1 {32}	1/2"	Flare	0.007 {0.07}	1.96 {20}	2.94 {30}	0.9			
UEV-1205BXF	12	3.5	14.9 {52.2}	14.7 {51.8}	10.2 {36}	15.9 {56}	5/8"					1.1			
UEV-1506BXF	15	5.3	22.5 {79.1}	22.3 {78.5}	15.5 {54.5}	23.9 {84}	3/4"					1.5			
UEV-1003GXF	10	2.0	8.5 {29.8}	8.4 {29.6}	5.9 {20.6}	9.1 {32}	3/8"	Rc							1.0
UEV-1204GXF	12	3.5	14.9 {52.2}	14.7 {51.8}	10.2 {36}	15.9 {56}	1/2"								1.3
UEV-1506GXF	15	5.3	22.5 {79.1}	22.3 {78.5}	15.5 {54.5}	23.9 {84}	3/4"								1.7
UEV-2010GXF	20	9.0	38.2 {134.3}	37.9 {133.2}	26.3 {92.6}	40.7 {143}	1"								1.9
UEV-1004DXF	10	2.0	8.5 {29.8}	8.4 {29.6}	5.9 {20.6}	9.1 {32}	1/2"	Solder							0.8
UEV-1205DXF	12	3.5	14.9 {52.2}	14.7 {51.8}	10.2 {36}	15.9 {56}	5/8"								0.9
UEV-1506DXF	15	5.3	22.5 {79.1}	22.3 {78.5}	15.5 {54.5}	23.9 {84}	3/4"								1.1
UEV-2007DXF	20	9.0	38.2 {134.3}	37.9 {133.2}	26.3 {92.6}	40.7 {143}	7/8"								1.6
UEV-2010DXF							1"								
UEV-2011DXF							1-1/8"								

- Weight includes a coil.
- Enclosure IP34 (UEV-W: Drip proof model)
- Nominal capacities (R410A) are based on $\Delta P = 0.015$ MPa, condensing temp. = 38°C and evaporating temp. = 5°C

ELECTRICAL RATING OF SOLENOID COILS


Type	Rated Voltage	Tolerance (%)	Voltampere (VA)		Power Consumption (W)	Insulation Class
			Running	Inrush		
REV	24V.AC, 100V.AC, 110V.AC 200V.AC, 220V.AC, 240V.AC	50/60Hz	+10 -15	17/14	43/35	8/7
	12V.DC, 24V.DC 48V.DC, 100V.DC	—	±10	—	—	10
UEV	24V.AC, 100V.AC, 110V.AC 200V.AC, 220V.AC, 240V.AC	50/60Hz	+10 -15	17/14	43/35	8/7

Current (A) = Voltampere / Rated Voltage


* IEC compliance

DIMENSIONS


Type REV-B, UEV-BX

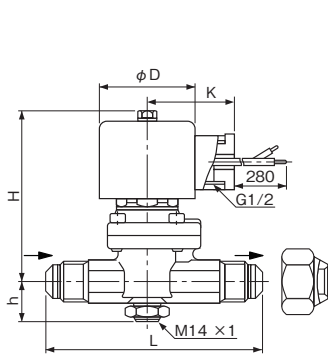


Type REV-G, UEV-GX

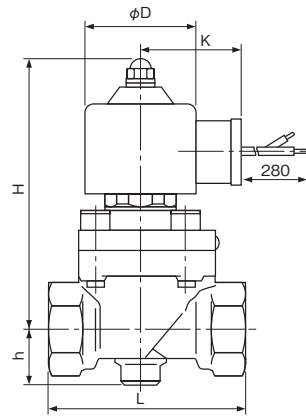

Type REV-D, UEV-DX

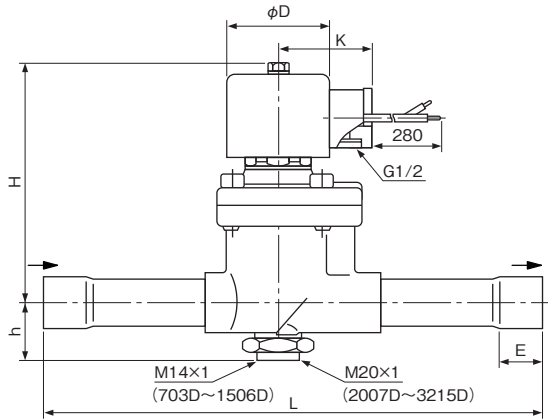

Type REV-EX

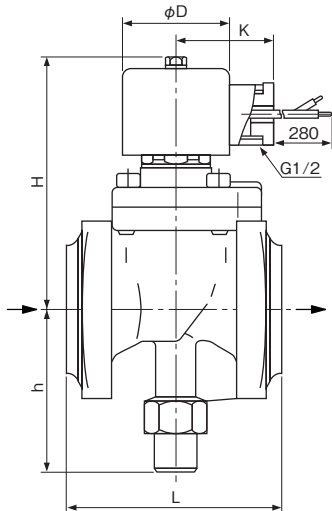

Unit: mm

Catalog No.		Unit: mm					
		L	H	h	E	ϕD	K
REV-	703BX [Y]	90	70 [73]	19	—	48	44
	1004BX [Y]	105	88 [90]	21			
	1205BX [Y]	115	90 [92]	22			
	1506BX [Y]	135	96 [99]	25			
	1003GX [Y]	65	89 [91]	20			
	1204GX [Y]	75	94 [96]	21			
	1506GX [Y]	85	99 [102]	24			
	703DX [Y]	150	70 [73]	19	10		
	1004DX [Y]	160	88 [90]	21	13		
	1205DX [Y]	180	90 [92]	22	16		
	1506DX [Y]	190	96 [99]	25	19		
	2007DX [Y]	230	112 [116]	29	20		
	2010DX [Y]						
	2011DX [Y]						
	2511DX	240	123	31	23		
	2512DX						
	2513DX						
	3213DX	260	126	35	26		
	3214DX						
	3215DX						
	2006EX	95	112	73	—		
	2510EX	110	123	78			
	3212EX	120	126	87			
4014EX	130	133	92				
5020EX	170	149	115				
6524EX	200	169	129				
6530EX	210						
UEV-	1004BX	105	108	21	—	48	44
	1205BX	115	110	22			
	1506BX	135	116	25			
	1003GX	65	109	20			
	1204GX	75	112	21			
	1506GX	85	119	24			
	2010GX	100	133	33			
	1004DX	160	108	21	13		
	1205DX	180	110	22	16		
	1506DX	190	116	25	19		
	2007DX	230	132	29	20		
	2010DX						
	2011DX						

SOLENOID VALVES FOR WATER

Type WEV

SAGINOMIYA

GENERAL DESCRIPTION

- Pilot operated, 2-way, normally closed valve.
- For water in refrigeration, cooling, air conditioning systems, and general industrial plant.
- Valves for non-corrosive brine are available. To order, specify catalog No. with "B"
Example: WEV-1504GLW for water
WEV-1504GLB for non-corrosive brine, warm water
- Compact molded coil commonly fits all valve sizes.
- Operates in any position ... can be conveniently located in horizontal or vertical line with coil on top.



Type WEV-G



Type WEV-F

TYPE NUMBER SELECTION (SPECIFICATIONS)

Catalog No.			Port Size (mm)	Cv Value	Connection		O.P.D.		Max. Working Pressure	Wt. (kg)	
Type	Model	Fluid			Steel Tube O.D.	Style	Min.	Max.			
WEV-	1504GL	W (Water)	15	4.3	1/2"	Rc	0.015 {0.15}	0.03 {0.3}	0.98 {10}	0.98 {10}	0.6
	2006GL		20	7.8	3/4"						0.8
	2510GL		25	10.4	1"						1.1
	3212GL		32	17.6	1-1/4"						1.6
	4014GL		40	26	1-1/2"						2.4
	5020GL		50	42	2"						3.6
	1504FL	B (glycol, Warm Water)	15	4.3	1/2"	* Flange (Round Type)	0.015 {0.15}	0.03 {0.3}			2.0
	2006FL		20	7.8	3/4"						2.6
	2510FL		25	10.4	1"						3.7
	3212FL		32	17.6	1-1/4"						5.0
	4014FL		40	26	1-1/2"						5.7
	5020FL		50	42	2"						7.7
	6524FL		65	65	2-1/2"		12.8				
	8030FL		80	100	3"		16.5				

* Without companion flange (Weight without companion flange and bolts)

- O.P.D.: Operating Pressure Differential (by water pressure)
- Ambient temperature: -30 to 50°C, allowable fluid temperature: 0 to 60°C (Type W), -35 to 90°C (Type B)
- Apparent power: 16VA
- Use of a strainer 80 to 100 mesh at the valve inlet is recommended.
- Weight includes a coil
- Enclosure IP34 (WEV-W: Drip proof model)

ELECTRICAL RATING OF SOLENOID COILS


Rated Voltage		Tolerance (%)	Voltampere (VA)		Power Consumption (W)	Insulation Class
			Running	Inrush		
24V.AC, 100V.AC, 110V.AC 200V.AC, 220V.AC, 240V.AC	50/60Hz	±10	18/14	57/47	9/8	* Class B Molded
12V.DC, 24V.DC 48V.DC, 100V.DC	—		—	—	11	

Specify voltage & frequency when order.


* IEC compliance

DIMENSIONS

Type WEV-G



Type WEV-F

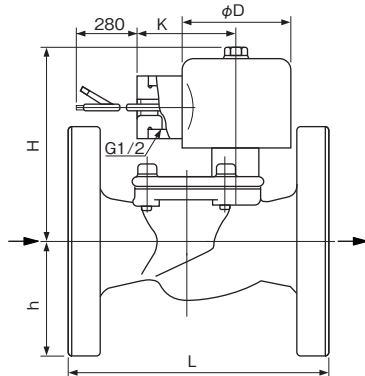

Unit: mm

Catalog No.		Unit: mm				
		L	H	h	φD	K
WEV-	1504GL	65	82	19	48	44
	2006GL	80	86	25		
	2510GL	90	91	29		
	3212GL	105	97	36		
	4014GL	120	103	47		
	5020GL	140	126	55		
	1504FL	105	82	48		
	2006FL	115	86	50		
	2510FL	125	91	63		
	3212FL	140	97	68		
	4014FL	150	103	70		
	5020FL	160	126	78		
	6524FL	200	138	88		
	8030FL	240	152	93		

BI-FLOW SOLENOID VALVES

High Volume OEM Item

Type BPV

SAGINO MIYA

GENERAL DESCRIPTION

- Bi-flow controlling applicable. Developed for the purpose of simplification of complicated refrigeration circuit.
- Not only for ordinary refrigeration circuit, suitable for flow change of heat exchanger on multi type heat pump air conditioner.



Type BPV-A

SPECIFICATIONS

- Fluid temperature: — 30 to 120°C
- Ambient temperature: — 20 to 60°C

TYPE NUMBER SELECTION

Catalog No.		* Fluid	Port Size (mm)	Cv Value	Bleed Cv Value B → A	* Nominal Capacity (U.S.R.T.) {kw}				Connection		Operation Pressure Differential (MPa)		Max. Working Pressure (MPa)	Wt. (kg)
						R410A	R134a	R404A	R22	Style	Copper Tube O.D.	Min.	Max.		
BPV-	803ADY	Refrigerant	7.8	1.5	Less Than 0.01	6.4 {22.4}	6.3 {22.2}	4.4 {15.4}	6.8 {23.8}	Solder	3/8"	0.01	2	4.2	0.33
	1204ADY		11	2.9	Less Than 0.013	12.3 {43.3}	12.2 {42.9}	8.5 {29.8}	13.1 {46.0}		1/2"				0.46
	1706ADY		17	6.6		28 {98.5}	27.8 {97.7}	19.3 {67.98}	29.8 {104.7}		3/4"	0.015			0.86

* Gas line only

- Bleeding will be happen when pressure of B side is higher than A side.
- Weight includes a coil

ELECTRICAL RATING OF SOLENOID COILS


Port Size (mm)	Rated Voltage		Tolerance (%)	Voltampere (VA)		Power Consumption (W)	Insulation Class
				Running	Inrush		
7.8, 11	100V.AC, 200V.AC 220V.AC, 240V.AC	50/60Hz	±10	12/10	36/30	6/5	* Class B Molded
17				17/14	51/42	7.5/6	

* Current (A)=Voltampere / Rated Voltage


* IEC compliance

Function of Bi-flow Solenoid Valve

Equivalent circuit of type BPV Bi-flow Solenoid Valve is as follow.

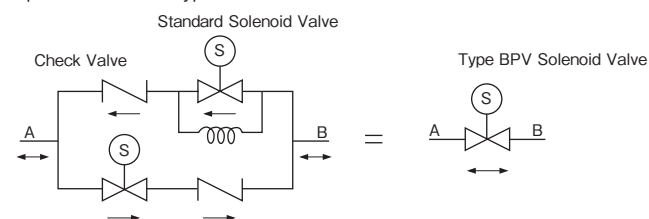

DIMENSIONS

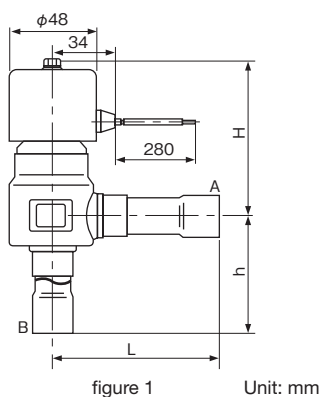

Catalog No.		Unit: mm			Form
		L	H	h	
BPV-	803ADY	48	76	48	figure 1
	1204ADY	61	69	60	
	1706ADY	91	85	82	

3-WAY SOLENOID VALVES

Type IEV

SAGInoMIYA

GENERAL DESCRIPTION

- For non-corrosive refrigerant (gas) in refrigeration units or air.
- Pilot operated, 3-way Distributing valve and Selector valve.



Type IEV-B



Type IEV-C

TYPE NUMBER SELECTION (SPECIFICATIONS)

Catalog No.	Port Size (mm)	Cv Value	* Nominal Capacity (Refrigerants in Liquid) (U.S.R.T.)		Connection		O.P.D.		Max. Working Press.	Body Test Press.	Fluid Temp. (°C)	Ambient Temp. (°C)	Operation	Wt. (kg)	
			R134a	R22	Copper pipe (O.D.)	Style	Min.	Max.							
IEV-B1505DXF	18	6.3	16	20	5/8"	Solder	0.49	2.25	2.94 {30}	4.41 {45}	—20 to 120	—20 to 50	branched	0.95	
IEV-B2007DXF	20	9.0	23	29	7/8"		{5.0}	{22.9}			—20 to 125			switched	1.0
IEV-B3211DXF	30	25	65	79	1-1/8"		0.29 {3.0}	2.06 {21}							2.6
IEV-B3212DXF					1-1/4"										
IEV-B3213DXF					1-3/8"										
IEV-C3211DXF			42	36	1-1/8"										
IEV-C3212DXF					1-1/4"										
IEV-C3213DXF					1-3/8"										

* Nominal capacities are based on $\Delta P = 0.015$ MPa, condensing temp. = 38°C and evaporating temp. = 5°C.

• O.P.D.: Operating Pressure Differential (by air pressure)

• Weight includes a coil

ELECTRICAL RATING OF SOLENOID COILS


Port Size (mm)	Rated Voltage		Tolerance (%)	Voltampere (VA)		Power Consumption (W)	Insulation Class
				Running	Inrush		
18, 20	100V.AC, 110V.AC 200V.AC, 220V.AC	50/60Hz	±10	11/9	33/27	6/5	* Class B Molded
30				16/13	40/33	8/7	

Current (A) = Voltampere / Rated Voltage


* IEC compliance

OPERATION

Type IEV-B

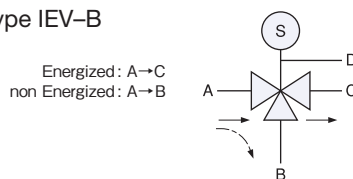


Type IEV-C

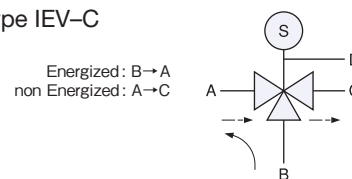


DIMENSIONS

Type IEV-B1505DXF (B2007DXF)

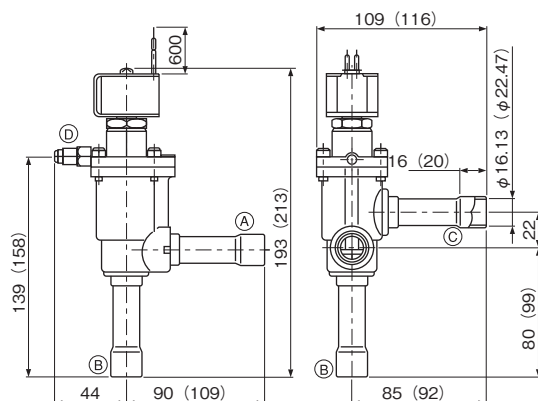

Type IEV-B3211DXF to B3213DXF, C3211DXF to C3213DXF

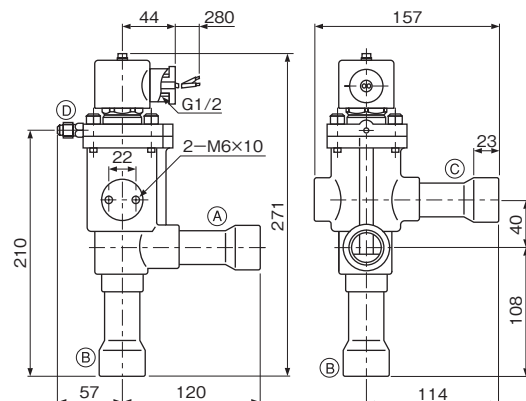

Unit: mm

4-WAY REVERSING VALVES

High Volume OEM Item (Type STF)

Type **STF**

SAGINOMIYA

GENERAL DESCRIPTION

- Pilot operated 4-way reversing valves are suitable for heat pump applications on unitary, split system and window type air conditioners, etc.
- 4-way pilot valve adoption has an advantage on reliable changeover operations.
- Designed to lower the minimum operating pressure difference between high and low side. Pressure drop and valve leakage are minimized.

CE mark applicable (available upon request)

UL listed (available upon request)

SPECIFICATIONS


- Max. working pressure: 4.2MPa {42.8kgf/cm²}
(Type STF-H****)
4.15MPa {42.3kgf/cm²}
(Type STF-****G)
- Ambient temperature: - 20 to 55°C
- Allowable fluid temperature: - 20 to 120°C
(STF-H0104 to STF-1511G)
- 20 to 130°C
(STF-2023G to 6001G)
- Ambient humidity: Less than 95% R.H.




Type STF-H01, H02



Type STF-H04, H07



Type STF-H06, H09

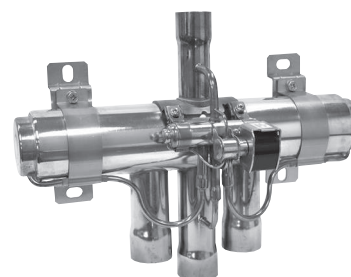

Type STF-25, 30, 40, 50, 60

TYPE NUMBER SELECTION

Catalog No.	Port Size (mm)	Capacity (R410A)		O.P.D. (MPa) {kgf/cm ² }		Connection (O.D.)		Wt. (kg)
		(kW)	(U.S.R.T.)	Max.	Min.	Discharge	Suction & Coils	
STF-H0104	8	1.8 to 6.4	0.51 to 1.82	3.1 {31.6}	0.3 {3.1}	5/16"	3/8"	0.2
STF-H0202	11.1	2.0 to 11.4	0.57 to 3.24			3/8"	1/2"	0.32
STF-H0301	11.5	5.3 to 14.6	1.50 to 4.15			1/2"	5/8"	0.37
STF-H0404	16	8.3 to 33	2.36 to 9.39				3/4"	0.77
STF-H0601	18.1	8.4 to 45	2.39 to 12.8					0.87
STF-H0712	20	21 to 53	5.97 to 15.0			3/4"	7/8"	1.2
STF-H0901	21.3	21 to 68.5	5.97 to 19.5			7/8"	1-1/8"	1.23
STF-1511G	23	39 to 59	11.1 to 16.7					1.55
STF-2023G	24	39 to 74	11.1 to 21.0			1"	1-1/4"	3.4
STF-2501G	28	52 to 94	14.8 to 26.7			1-1/4"		4.7
STF-3001G	34	65 to 124	18.5 to 35.2			1-1/2"	1-3/4"	9.1
STF-4001G	40	115 to 188	32.7 to 53.4				2-1/8"	9.4
STF-5001G	50	145 to 235	41.2 to 66.8					20.0
STF-6001G	60	230 to 360	65.4 to 102			I.D. 1-5/8"	2-5/8"	

• O.P.D.: Operating Pressure Differential (with air)


ELECTRICAL RATING OF SOLENOID COILS

Catalog No.	Rated Voltage		Tolerance (%)	Voltampere(VA)		Power Consumption (W)	Insulation Class	
				Running	Inrush			
STF-H * * * *	100V. AC	50/60Hz	+10	10/8	30/24	6/5	* Class B Molded	
	200V. AC		-15					
	110V. AC		+10	11/9	33/27			
	220V. AC		-10					
STF- * * * * G	230V. AC	50/60Hz	+10	13/10	39/30	7/6		
	240V. AC		-15	11/9	33/27	6/6		
	100V. AC		+10					
	200V. AC		-10					


* IEC compliance

DIMENSIONS


Type STF-H0104 [H0202]

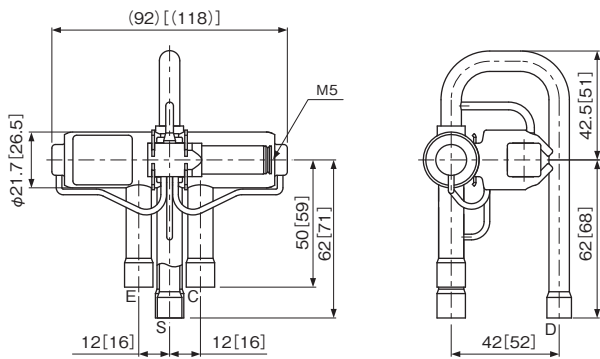


Type STF-H0301

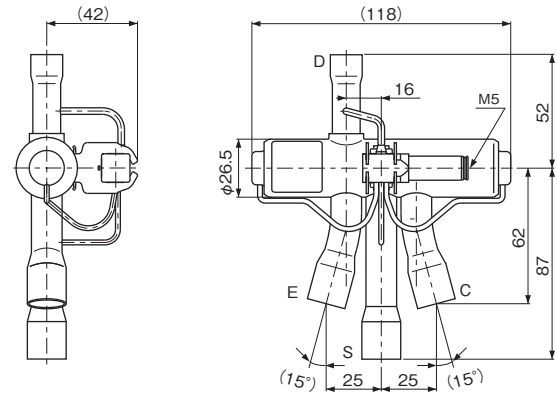


Type STF-H0404 [H0712]

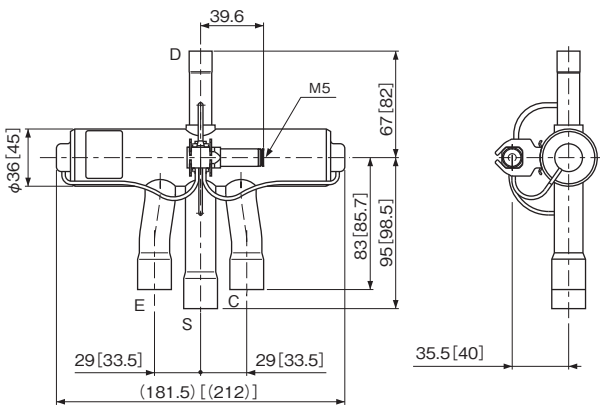


Type STF-H0601 [H0901]

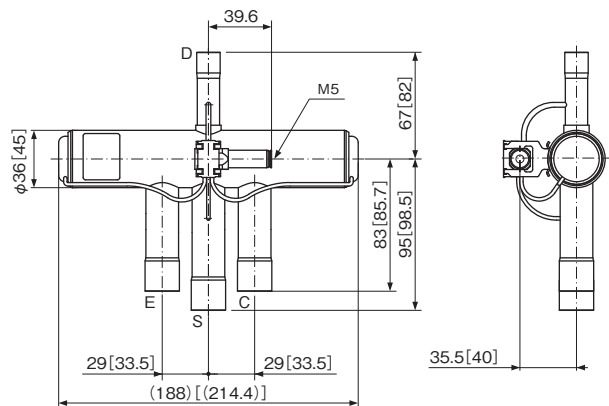

Type STF-1511G


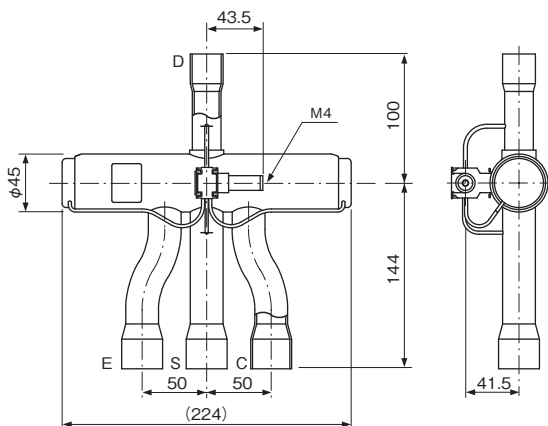


Type STF-2023G


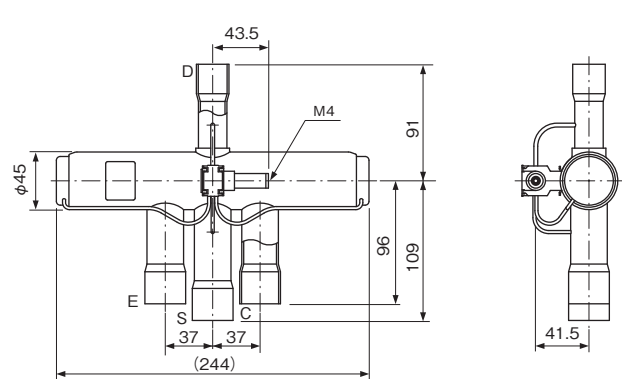


Unit: mm



Type STF-2501G

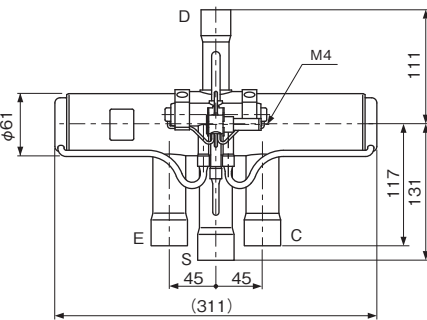



Type STF-3001G

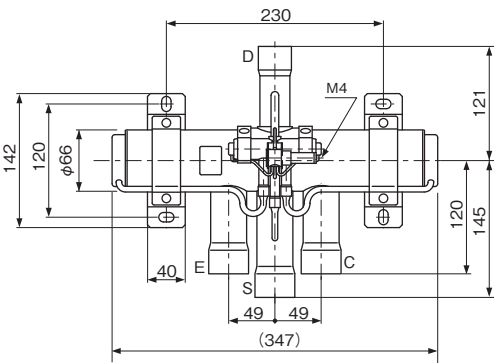

Type STF-4001G, -5001G

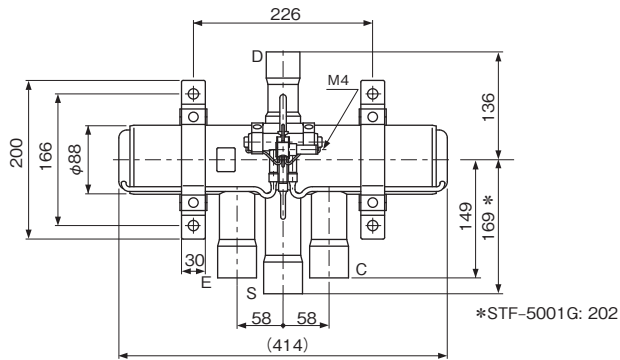



Type STF-6001G

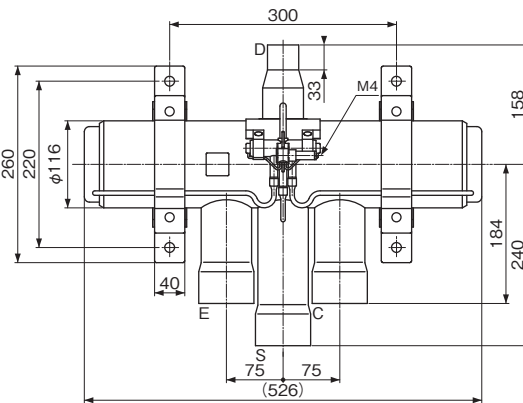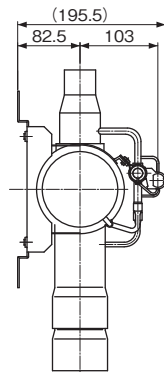

Unit: mm

FLOW RATE (Capacity)

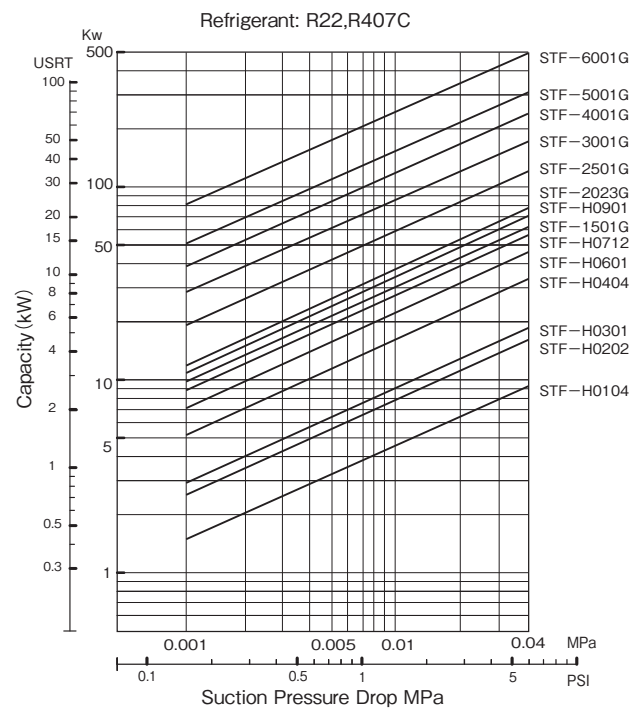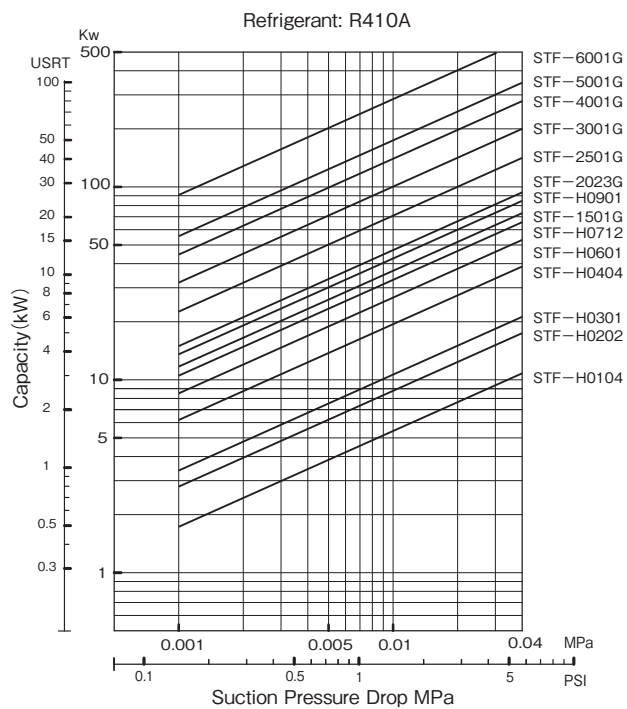

* Flow Rate Conditions Condensing temp.: 38°C
Evaporator temp.: 5°C
Superheat temp.: 5°C

MOTORIZED BALL VALVES

Type MJV

SAGINO MIYA

GENERAL DESCRIPTION

- Proportional Control valve for hot or chilled water, industrial water and steam circuit.
- Compact & Light weight design, manual operation is also available.
- Various types of water supply Equipments
- Air Handling Units
- Ice Storage Units



Type MJV

SPECIFICATIONS

Valve Type		Two-way Valve	Two-way Valve for Steam	Three-way Valve
Item				
VALVE PART	Water Test Pressure	1.6MPa		
	Air Tight Pressure	1.6MPa		
	Max. Working Pressure	1.6MPa (0.2MPa for Steam)	1.6MPa (0.5MPa for Steam)	1.6MPa
	Fluid	Non-corrosive water and Steam		Non-corrosive water
	Fluid Temperature	0 to 120°C	0 to 160°C	0 to 90°C
	Flow Characteristics	Equal Percentage		Corrected Linear
	Valve Leakage	Cv: 0.1% or less		—
	Material	Body: Bronze Casting, Seat Ring: Fluoro-resin, O-ring: Fluoro rubber, Spindle: Stainless Steel, Plug: Stainless Steel		
MOTOR PART	Power Supply Voltage	24V.AC±10%, 50/60Hz		
	Max. power Consumption	12VA		
	Housing Construction	Rain-Proof (JIS C 0920 IP53)		
	Ambient Temperature	Operating Temp.: −10 to 50°C, Storage Temp.: −20 to 70°C		
	Timing	Approx. 52 sec.		
	INPUT SIGNAL	Resistance Input	0 to 135Ω	
		Current Input	DC 4 to 20mA (Input Impedance 250Ω)	
		Voltage Input	DC 1 to 5V (Input Impedance 100kΩ), DC 0 to 10V (Input Impedance 250kΩ)	
	Material	Case: PPS Resin, Cover: ABS Resin		
	Manual Operation	Yes		
Flow Display	O: Open, S: Close		O: Open(C→A), S: Close(C→A)	
Movement of Valve		Input Signal 135Ω・4mA・1V・0V:Close		Input Signal 135Ω・4mA・1V・0V: Close(C→A)

TYPE NUMBER SELECTION

Two-way Valve

Catalog No.			Connection Rc (O.D.)	Cv Value	Max. Operation Press. Differential (MPa)	Connection Fastening Torque (N·m)	Dimension			Wt. (kg)
Type	Model	Input Signal					H	L	D	
MJV-	1504GQ1	70 (Resistance 0 to 135Ω)	1/2"	1	1	34.3	152	56	34	1.5
	1504GQ2			2						
	1504G			3.5						
	2006G	71 (4 to 20 mA)	3/4"	6.5	0.8	49	155	69	43	1.7
	2510G	72 (1 to 5 VDC)	1"	12		58.8	159	82	51	1.9
	3212G	73 (0 to 10 VDC)	1-1/4"	20		78.5	165	97	65	2.6
	4014G		1-1/2"	30	0.6	83.4	178	106	72	3.2
	5020G		2"	45	0.4	98.1	185	128	90	4.6

Two-way Valve for Steam

Catalog No.			Connection Rc (O.D.)	Cv Value	Max. Operation Press. Differential (MPa)	Connection Fastening Torque (N·m)	Dimension			Wt. (kg)
Type	Model	Input Signal					H	L	D	
MJV-	H1504GQ1	70 (Resistance 0 to 135Ω)	1/2"	1	1	34.3	202	56	34	1.8
	H1504GQ2			2						
	H1504G			3.5						
	H2006G	71 (4 to 20 mA)	3/4"	6.5	0.8	49	205	69	43	2.0
	H2510G	72 (1 to 5 VDC) 73 (0 to 10 VDC)	1"	12		58.8	209	82	51	2.2

Three-way Valve


Catalog No.			Connection Rc (O.D.)	Cv Value	Max. Operation Press. Differential (MPa)	Connection Fastening Torque (N·m)	Dimension				Wt. (kg)
Type	Model	Input Signal					H1	H2	H2	L	
MJV-	M1504G	70	1/2"	3.5	0.1	34.3	152	30	56	34	1.6
	M2006G	(Resistance 0 to 135Ω)	3/4"	6.5		49	155	37	69	43	1.8
	M2510G	71	1"	12		58.8	159	44	82	51	2.1
	M3212G	(4 to 20 mA)	1-1/4"	20		78.5	165	51	97	65	2.8
	M4014G	72	1-1/2"	30		83.4	178	57	106	72	3.5
	M5020G	(1 to 5 VDC)	2"	45		98.1	185	67	128	90	5.0
		73									
		(0 to 10 VDC)									

WIRING


Resistance Input	Current Input	Voltage Input
① (Blue)COM. Input ② (Brown)0 to 135Ω ③ (Black) ④ (Red) Supply Voltage 24V.AC	① (Blue)COM. Input ② (Brown)4 to 20mA ③ (Black) ④ (Red) Supply Voltage 24V.AC	① (Blue)COM. Input ② (Brown)1 to 5V, 0 to 10V ③ (Black) ④ (Red) Supply Voltage 24V.AC

DIMENSIONS


Two-way Valve

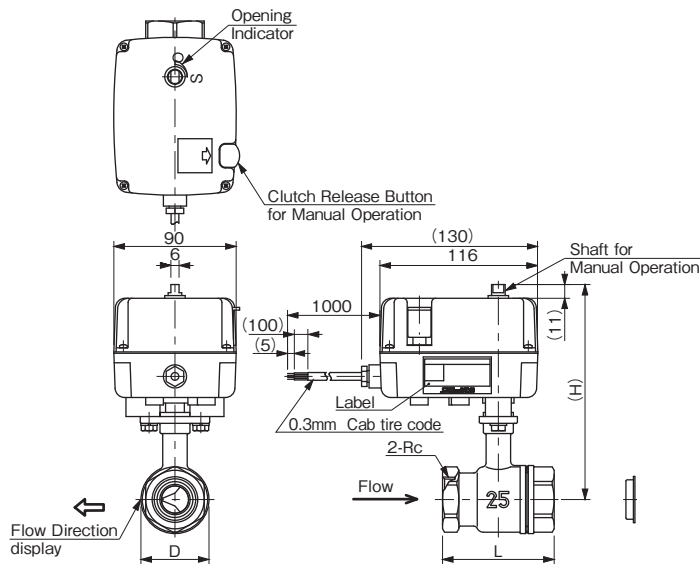

Two-way Valve for Steam

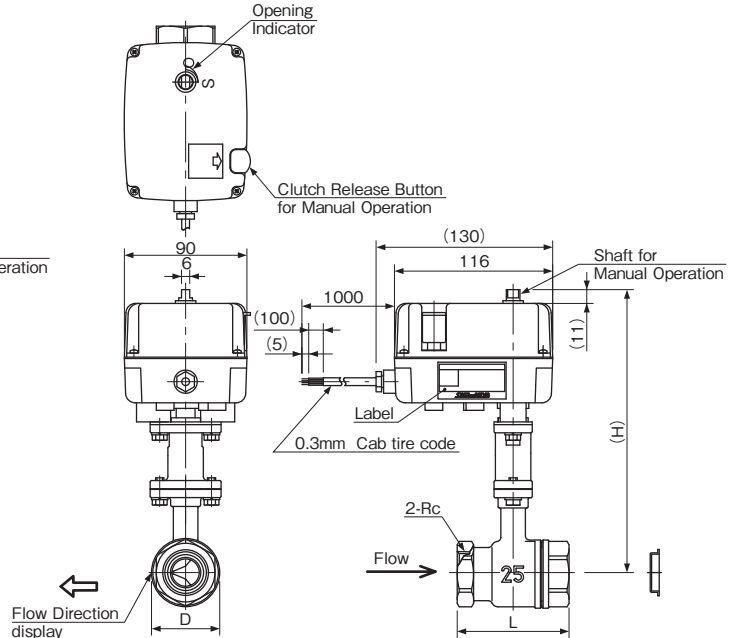

Three-way Valve

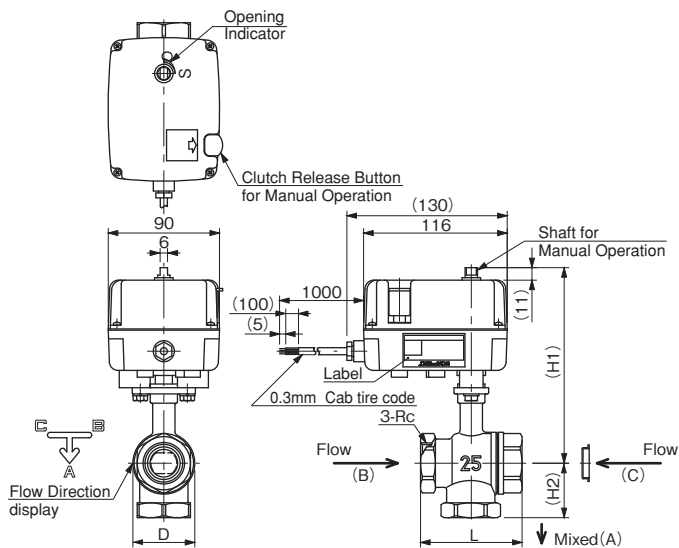


Manual Operation

- Use a spanner at Manual Operation shaft (Torque:3N·m), with pushing a Clutch Release Button. Manual operation can be carried out by rotating the shaft. Don't operate in energized position for the safety. -- please do not operate it by any means.

Mounting Position

Mounting position should be in the below range.

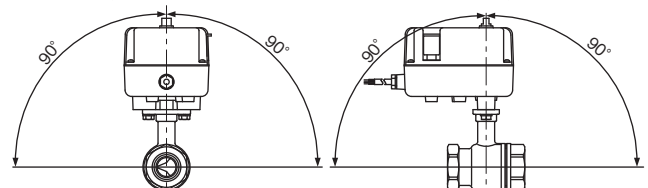

Unit: mm

Opening Indicator: O...Open, S...Close

DAMPER & VALVE MOTOR ACTUATORS

Type EGK & WGK

SAGInoMIYA

GENERAL DESCRIPTION

- Series GK motor actuator can provide On-Off, proportional or floating control of damper, valve or other controlling devices.
- Balancing relay without contact causes no burn-out.
- Type EGK is for damper.
- Type WGK is for valve.

TYPE NUMBER SELECTION (SPECIFICATIONS)


Power requirement: 24V.AC $\pm 10\%$, 50/60Hz

Max. power consumption: 21VA (without spring return action)
24VA (with spring return action)

Input signal: resistance 0 to 135 Ω
Current 4 to 20mA. DC
(Input Impedance 250 Ω)
Voltage 1 to 5V. DC
(Input Impedance 100k Ω)



Type EGK

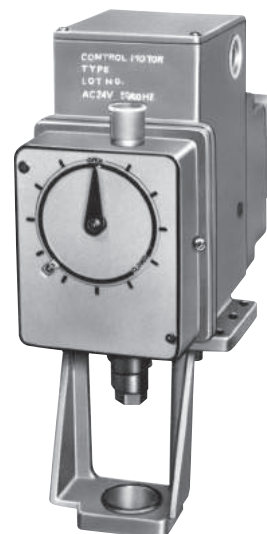

Type WGK

Type: EGK

Torque: 12.2N·m {1.25 kg·m}
(without spring return action)
3.9N·m {0.4 kg·m}
(with spring return action)
Rotation angle: 90 to 270°
(without spring return action)
90 to 160°
(with spring return action)
Delivery Setting 90°
Timing: 80 sec/160°
Ambient temp.: - 20 to 55°C
(without spring return action)
- 10 to 55°C
(with spring return action)
Weight: 4.3kg
(without spring return action)
6.1kg
(with spring return action)

Type: WGK

Thrust: 1220N {125 kgf}
(without spring return action)
390N {40 kgf}
(with spring return action)
Stroke: 14 to 50mm
(without spring return action)
14 to 30mm
(with spring return action)
Delivery Setting 20mm
Timing: 80 sec/stroke 25mm
Ambient temp.: - 20 to 55°C
(without spring return action)
- 10 to 55°C
(with spring return action)
Weight: 5kg
(without spring return action)
6.7kg
(with spring return action)

DAMPER MOTOR SELECTION

Function	On-Off / Floating Control	Without Positioning Balance Relay	With Positioning Balance Relay	With Positioning Balance Relay	
	*1 On-Off / Floating	*2 On-Off Servo	*3 Resistance Input	*4 Current Input	Voltage Input
Standard	EGK-N500A	EGK-N600 A/S	EGK-N700 A/S	EGK-N701 A/S	EGK-N702 A/S
With Auxiliary Potentiometer	—	EGK-N610 A/S	EGK-N710 A/S	EGK-N711 A/S	EGK-N712 A/S
With Auxiliary Switch	EGK-N520A	EGK-N620 A/S	EGK-N720 A/S	EGK-N721 A/S	EGK-N722 A/S

VALVE MOTOR SELECTION

Function	On-Off / Floating Control	Without Positioning Balance Relay	With Positioning Balance Relay	With Positioning Balance Relay	
	*1 On-Off / Floating	*2 On-Off Servo	*3 Resistance Input	*4 Current Input	Voltage Input
Standard	WGK-N500A	WGK-N600 A/S	WGK-N700 A/S	WGK-N701 A/S	WGK-N702 A/S
With Auxiliary Potentiometer	—	WGK-N610 A/S	WGK-N710 A/S	WGK-N711 A/S	WGK-N712 A/S
With Auxiliary Switch	WGK-N520A	WGK-N620 A/S	WGK-N720 A/S	WGK-N721 A/S	WGK-N722 A/S

* 1. The motor actuates with On-Off or floating signal from sensor.

* 2. The motor actuates with proportional signal from electronic sensor (Example: Type RBE Control Unit).

* 3. The motor actuates with the signal between 0 and 135 Ω from electric sensor (Example: Type PWS Thermostat).

* 4. Spring Return Type is so designed that actuator shaft returns to safe side on current failure.

• Auxiliary potentiometer is to provide the signal between 0 and 135 Ω in accordance with motor angular rotation for output.


• Auxiliary switch provides the contact signal of S.P.D.T. for output.

• Enclosure: IP62


INTERNAL WIRINGS

- Check power supply to be 24V. AC $\pm 10\%$.
- Wiring is to be based on the technical standard of electrical installation. Be assured to use covered copper wire larger than 1.2 mm dia.
- Terminal wiring should be conducted with flexible wire of adequate length to prevent wire disconnection from slight move of the motor.


EGK-N500A, WGK-N500A

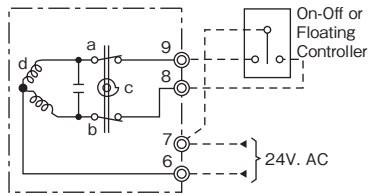


EGK-N700A/S, WGK-N700A/S

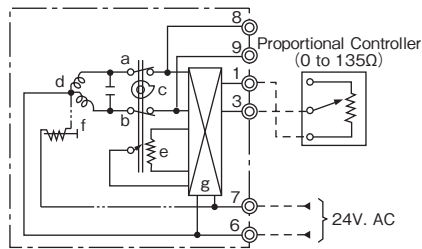


EGK-N600A/S, WGK-N600A/S

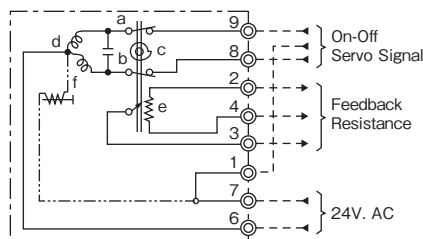


EGK-N701A/S, N702A/S, WGK-N701A/S, N702A/S

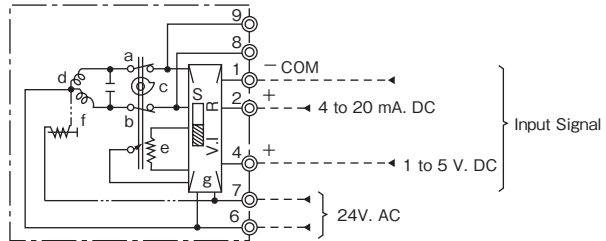

Auxiliary Potentiometer



Auxiliary Switch



EGK-N □ 1 □ A/S
WGK-N □ 1 □ A/S

EGK-N □ 2 □ A/S
WGK-N □ 2 □ A/S

⊙ Terminals

— Motor Internal Wiring

--- Motor External Wiring

— Spring Return Type Only

a: Upper Limit Switch

b: Lower Limit Switch

c: Cam

d: Condenser Motor


e: Feedback Potentiometer

f: Spring Return Releasing Magnet


g: Balance Relay

DIMENSIONS


Type EGK-N...A

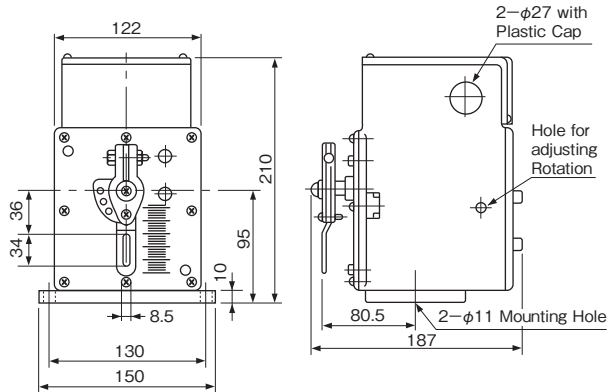


Type EGK-N...S

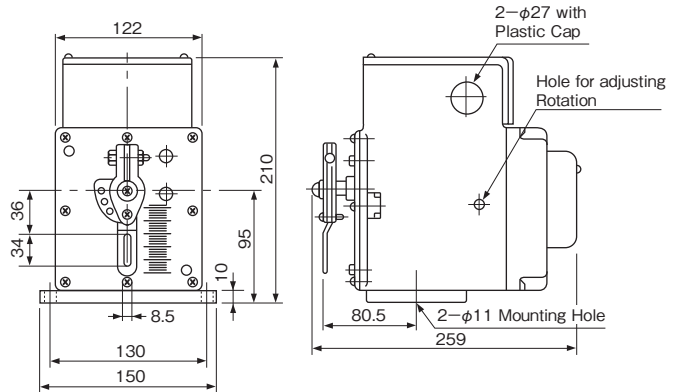

Type WGK-N...A

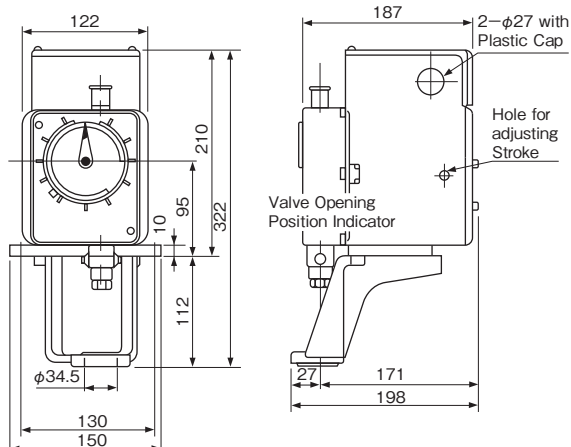

Type WGK-N...S

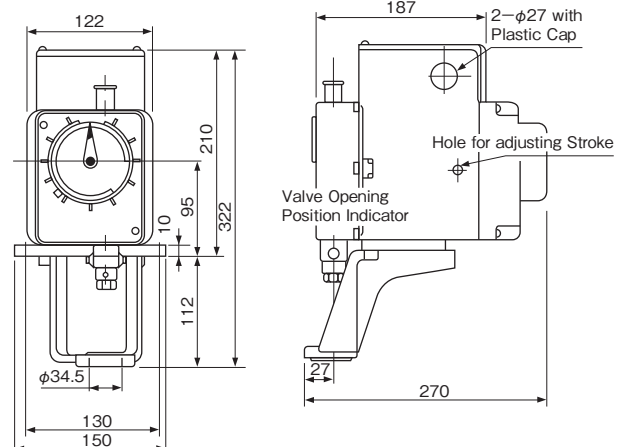


2-WAY & 3-WAY CONTROL VALVES

Type NVK


SAGInoMIYA

GENERAL DESCRIPTION

- Type NVK control valves are accompanied by Saginomiya type WGK motor for two position (On-Off), floating or proportional control.
- For use with low or high pressure hot and chilled water or non-corrosive fluid.
- NVK ... 2-way valve (single seated type)
NVK-W ... 2-way valve (double seated type)
NVK-M ... 3-way valve (mixing valve)
- Wide model selection available for various applications.
- V-port plug provides almost linear flow characteristic.

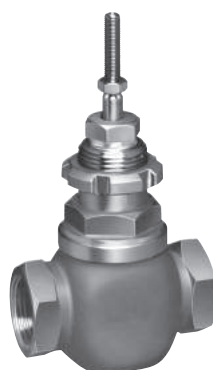

Type NVK-G

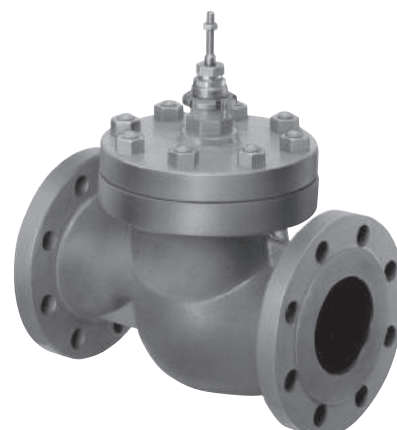

Type NVK-F

TYPE NUMBER SELECTION (SPECIFICATIONS)

Type NVK – 2-way valve

Item \ Model	NVK— * * * * GL	NVK— * * * * FL	NVK—W * * * * FL
Connection	Rc	Flange (JIS 10K)	Flange (JIS 10K)
Fluid	Non-corrosive Water and Steam		
Max. Working Press.	0.98MPa {10 kgf/cm ² }		0.98MPa {10 kgf/cm ² }
Fluid Temp. (°C)	0 to 200		0 to 200
Flow Characteristic	Equal Percentage		
Material of Body	CAC406	FC200	FC200
Material of Plug	SCS14		
Material of Seat Ring	SUS316		
Material of Stem	SUS304		

Type NVK-M – 3-way valve


Item \ Model	NVK—M * * * * GL	NVK—M * * * * FL
Connection	Rc	Flange (JIS 10K)
Fluid	Non-corrosive Water for Air conditioning	
Max. Working Press.	0.98MPa {10 kgf/cm ² }	
Fluid Temp. (°C)	0 to 200	
Flow Characteristic	Equal Percentage	
Material of Body	CAC406	FC200
Material of Plug	SCS14	
Material of Seat Ring	SUS316	
Material of Stem	SUS304	

Type NVK – 2-way valve

Catalog No.		Port Size (mm)	Connection		Cv Value	Stroke (mm)	Close off Rating MPa {kgf/cm ² }			Dimensions (mm)			Wt. (kg)
			Tube O.D.	Style			WGK-N * A	WGK-N * S	WGK-N * L	L	H	h (h2)	
NVK-	1504GL@1	15	1/2"	Rc	1	20	0.98 {10}	0.98 {10}	0.98 {10}	80	43	28	0.9
	1504GL@2				2.5			0.66 {6.7}					
	1504GL				5			0.38 {3.9}					
	2006GL	20	3/4"		8			0.24 {2.4}					90
	2510GL	25	1"		12		0.95 {9.7}	0.14 {1.4}	105	50	30	1.6	
	3212GL	32	1-1/4"		20		0.61 {6.2}	0.09 {0.9}	120	60	35	2.4	
	4014GL	40	1-1/2"		30		0.40 {4.1}	0.05 {0.5}	0.67 {6.8}	140	68	46	3.6
	5020GL	50	2"		45		0.28 {2.9}	0.044 {0.45}	0.48 {4.9}	276	125	87.5	19.9
	6524FL	65	2-1/2"	70	0.19 {1.9}	0.028 {0.29}	0.31 {3.2}	298	149	92.5	25		
	8030FL	80	3"	110	0.12 {1.2}	—	0.2 {2}	352	169	105	36		
	10040FL	100	4"	180	40								
NVK-W	4014FL@1	40	1-1/2"	Flange (JIS 10K)	20	20	0.98 {10}	—	—	222	110	70	10.5
	4014FL				30					254	114	(80)	13.5
	5020FL	50	2"		45	276				129	(96)	18	
	6524FL	65	2-1/2"		70	30	0.98 {10}	0.81 {8.3}		298	156	(115)	28.5
	8030FL	80	3"		110			0.66 {6.7}		352	187	(150)	46.5
	10040FL	100	4"		180	40	—	403		208	(153)	63.3	
	12550FL	125	5"		260			451		225	(170)	90.6	
	15060FL	150	6"		380			543		278	(212)	167	
	20080FL	200	8"		630	45	0.69 {7}	673		319	(232)	251	
	250100FL	250	10"		960		0.49 {5}						

- Cv ... Flow (L/min) passing through the valve at full opening when water temperature is 15°C and pressure difference across the valve is 0.00048 MPa {0.0049 kgf/cm²}
- The dimension value bracketed off by () shows "h2" value due to "h2" value being bigger than the one of "h".

DIMENSIONS

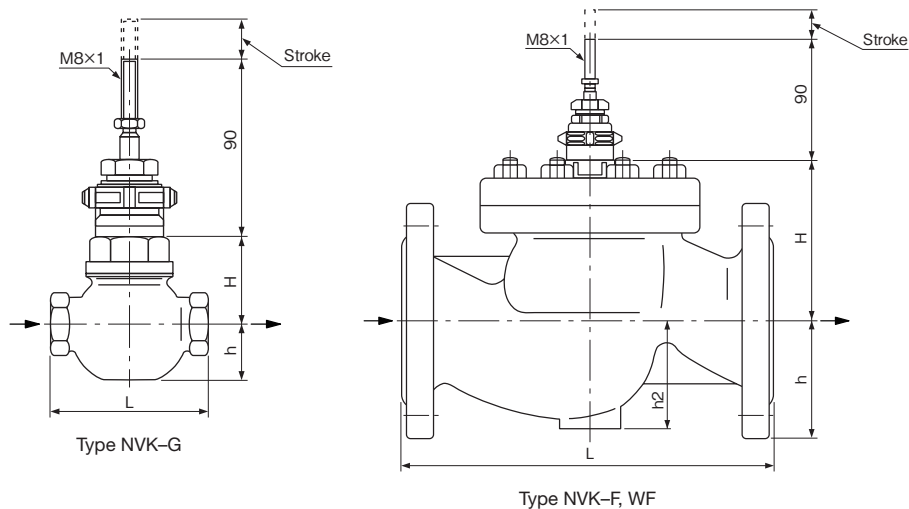


Unit: mm

Type NVK 3-way valve (used as a mixing valve)

Catalog No.		Port Size (mm)	Connection		Cv Value	Stroke (mm)	Close off Rating MPa {kgf/cm ² }			Dimension (mm)			Wt. (kg)
			Tube O.D.	Style			WGK-N * A	WGK-N * S	WGK-N * L	L	H	h	
NVK-M	1504GL	15	1/2"	Rc	5	20	0.98 {10}	0.38 {3.9}	0.98 {10}	80	29	72	1.1
	2006GL	20	3/4"		8			0.23 {2.3}		80	29	73	1.12
	2510GL	25	1"		12		0.95 {9.7}	0.14 {1.4}		90	32	77	1.45
	3212GL	32	1-1/4"		20			0.09 {0.9}		105	38	80	1.95
	4014GL	40	1-1/2"		30		0.61 {6.2}	0.09 {0.9}		120	43	84	2.7
	5020GL	50	2"		45		0.40 {4.1}	0.061 {0.62}		140	51	97	4.17
	6524FL	65	2-1/2"	Flange (JIS 10K)	70	30	0.28 {2.9}	0.044 {0.45}	0.48 {4.9}	276	92	185	24.5
	8030FL	80	3"		110		0.19 {1.9}	0.028 {0.29}	0.31 {3.2}	298	106	215	31
	10040FL	100	4"		180	40	0.12 {1.2}	—	0.2 {2}	352	131	238	42
	12550FL	125	5"		260		0.08 {0.8}		0.13 {1.3}	403	149	263	64.5
	15060FL	150	6"		380		0.05 {0.5}		0.09 {0.9}	451	173	288	92

• Cv ... Flow (L/min) passing through the valve at full opening when water temperature is 15°C and pressure difference across the valve is 0.00048 MPa {0.0049 kgf/cm²}

DIMENSIONS

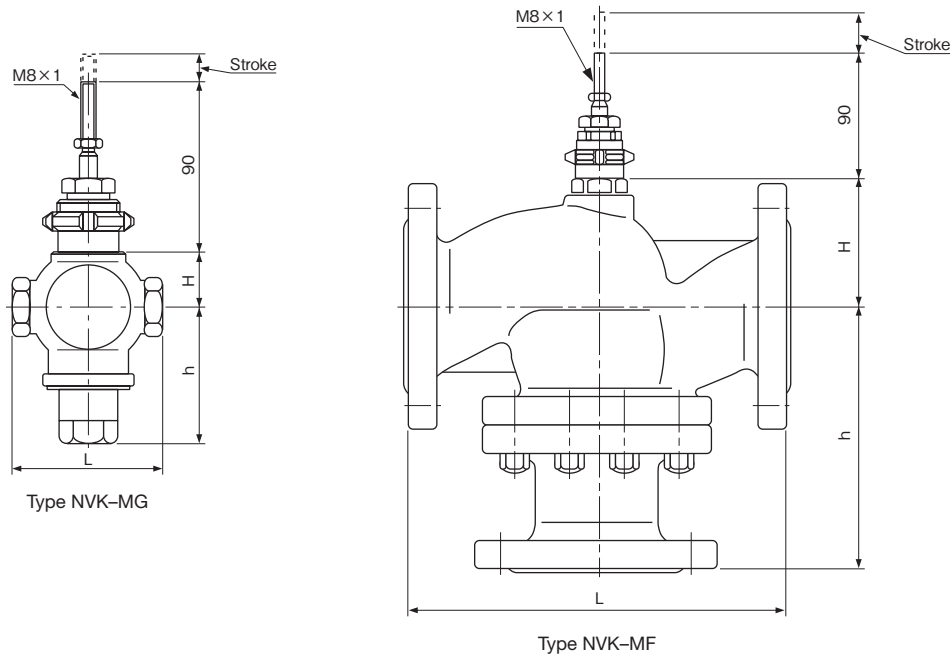

Unit: mm

OTHER VALVES

CHECK VALVES	99
Type ACV & BCV	
PRESSURE ACTUATED WATER REGULATING VALVES	100
Type VWR	
PRESSURE ACTUATED WATER REGULATING VALVES . .	101–102
Type CWR, AWR, GWR, MWR & SWR	
TEMPERATURE ACTUATED WATER REGULATING VALVES . . .	103–104
Type OWR, HWR & XWR	
PRESSURE REGULATING VALVES	105–106
Type EPR	
PRESSURE REGULATING VALVES	107–108
Type SPR & DPR	
PRESSURE REGULATING VALVES	109–110
Type HPR	
DIAPHRAGM TYPE STOP VALVES	111
Type ADV	
BELLOWS TYPE STOP VALVES	112–113
Type NBV	

CHECK VALVES

Type ACV & BCV

SAGINOMIYA

GENERAL DESCRIPTION

- Install in the liquid line of heat pump air conditioner to prevent the counter flow at change over of cycles from heating to cooling and vice versa.
- Also for prevention of reverse flow of high pressure gas when compressor stops.
- For use with Fluorinated Refrigerants, and Inert Gas.
- Can be mounted in horizontal or vertical line.
- Valve material : Fluorocarbon resin



Type ACV-B



Type BCV

TYPE NUMBER SELECTION (SPECIFICATIONS)

Type ACV


Catalog No.	Fluid	Port Size (mm)	Cv Value	Connection		Max. Working Pressure (MPa) {kgf/cm ² }	Allowable Liquid Temp. (°C)	Wt. (kg)	
				Copper Tube (O.D.)	Style			B	D
ACV-2B (D)	Fluorinated Refrigerants	4.8	0.55	1/4"	B: Flare D: Solder	3 {30.6}	-40 to 125	0.1	0.05
ACV-3B (D)		7.5	1	3/8"				0.2	0.1
ACV-4B (D)	Air	10	2.4	1/2"				0.4	0.2
ACV-5B (D)		12.5	4.2	5/8"				0.5	0.3
ACV-6B (D)	Inert Gas	16	6	3/4"				0.7	0.5

Type BCV


Catalog No.	Fluid	Port Size (mm)	Cv Value	Connection		Max. Working Pressure (MPa) {kgf/cm ² }	Allowable Liquid Temp. (°C)	Wt. (kg)	
				Copper Tube (I.D.)	Style			B	D
BCV-302DY	Fluorinated Refrigerants	3	0.33	1/4"	Solder	4.15 {42.3}	-30 to 120	0.02	
BCV-603DY		5.5	0.97	3/8"				0.04	
BCV-804DY		8	2	1/2"				0.07	
BCV-1005DY		10	3.5	5/8"				0.14	
BCV-1306DY		12.5	4.7	3/4"				0.18	
BCV-1810DY		18	8	1"				0.34	

• Standard valve material of BCV-1005DY is Polyamide resin.


DIMENSIONS




Type ACV-B

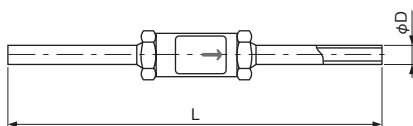

Type ACV-D



Type BCV-302DY to 804DY



Type BCV-1005DY to 1810DY

Unit: mm

Type ACV

Catalog No.	Unit: mm		
	L	φD	S
ACV-2B	58	—	14
ACV-3B	76		19
ACV-4B	87		24
ACV-5B	103		30
ACV-6B	115		36
ACV-2D	120	6.35	—
ACV-3D	160	9.53	
ACV-4D	187	12.70	
ACV-5D	235	15.88	
ACV-6D	300	19.05	

Type BCV

Catalog No.	Unit: mm		
	L	φD	E
BCV-302DY	112	6.55	—
BCV-603DY	120	9.71	8
BCV-804DY	140	12.93	13
BCV-1005DY	160	16.12	16
BCV-1306DY	180	19.30	19
BCV-1810DY	200	25.7	20

PRESSURE ACTUATED WATER REGULATING VALVES

Type VWR

SAGINO MIYA

GENERAL DESCRIPTION

- Type VWR: 2-way press. actuated water regulating valves, open on pressure increase.
- Refrigerant: R410A, R407C, R404A
- Type VWR is applicable to the adjustment range which exceeds the applicable adjustment range of type AWR (Refer to next page).
- Pressure connection: 1/4" flare nut (Standard)
- Body material: Bronze for water and glycol.



TYPE NUMBER SELECTION (SPECIFICATIONS)

PRESSURE ACTUATED VALVES 2-WAY

Unit: MPa {kgf/cm²}

Catalog No.	Kind of Refrigerant	Valve Body Material	Connection		Press. Range	Max. Working Press.	Max. Water Temp.(°C)	Max. Water Press.	* Factory Setting	Wt. (kg)
			Size	Style						
VWR-	1203G	Fluorinated Refrigerants	3/8"	Rc	1.5 to 2.9 {15.3 to 29.6}	4.2 {42.8}	60	1 {10.2}	2.4 {24.5}	0.68
	1504G		1/2"							0.9
	2006G		3/4"							1.0


* Pressure at which valve starts opening.

• Adjust type VWR to a set value which is suitable for the refrigerant employed.

FLOW CAPACITY

Flow Capacity shows respectively refrigeration press. diff. at horizontal axis and flow rate of cooling water at vertical axis considering water press. diff. before and behind a valve with 0.1 MPa. (press. diff. between inlet and outlet of valve)

In case of water press. diff. before and behind a valve is excepting for 0.1MPa, value is calculated multiplying by coefficient in compensation table.

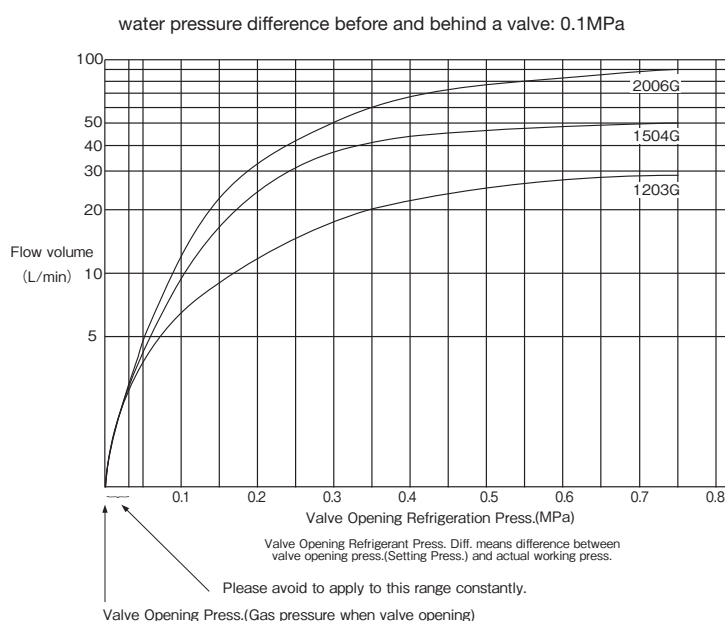

ADJUSTMENT


One full turn of adjusting screw changes pressure setting as shown below.

Catalog No.	Change in Press. Setting
VWR- 1203G	Approx. 0.2MPa
1504G	
2006G	

COMPENSATION COEFFICIENTS

Press. Drop Across Valve: MPa {kgf/cm ² }	Coefficient
0.2 {2}	1.4
0.1 {1}	1
0.03 {0.3}	0.55
0.05 {0.5}	0.7
0.07 {0.7}	0.8

DIMENSIONS

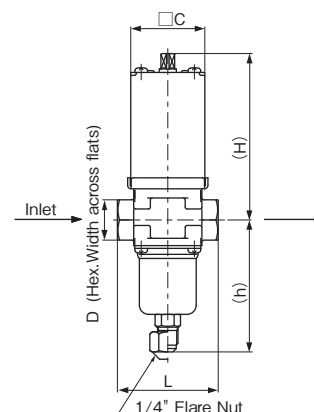

Catalog No.		Unit: mm				
		D	L	H	h	☐ C
VWR-	1203G	22	55	91	72	40
	1504G	27	70	100	83	42
	2006G	32	80	104	87	

PRESSURE ACTUATED WATER REGULATING VALVES

Type CWR, AWR, GWR, MWR & SWR

SAGINOMIYA

GENERAL DESCRIPTION

- Type CWR, AWR & MWR: 2-way press. actuated water regulating valves, open on pressure increase.
- Type GWR: 2-way press. actuated water regulating valves, open on pressure decrease.
- Type SWR: 3-way press. actuated water regulating valves.
- Pressure connection: 1/4" flare nut (Standard)
- Body material: Bronze for water and glycol, cast iron for water only



Type AWR



Type SWR

TYPE NUMBER SELECTION (SPECIFICATIONS)

PRESSURE ACTUATED VALVES 2-WAY

Unit: MPa {kgf/cm²}

Catalog No.		Kind of Refrigerant	Valve Body Material	Connection		Press. Range	Max. Working Press.	Max. Water Temp. (°C)	Max. Water Press.	* Factory Setting	Wt. (kg)		
				Size	Style								
CWR-	803GLWQ1	Fluorinated Refrigerants	Bronze	3/8"	Rc	0.6 to 1.8 {6.0 to 18.0}	2 {20}	60	1 {10}	0.75 {7.5}	0.45		
AWR-	1204BLW			1/2"	Flare	0.78 to 1.77 {8.0 to 18.0}	1.96 {20}			0.88 {9}	0.8		
	1203GLW			3/8"	Rc	0.59 to 1.77 {6.0 to 18.0}				0.74 {7.5}	0.66		
AWR-GWR-	1504GLW			1/2"							0.8		
	2006GLW			3/4"							1.0		
	2510GLW			1"							1.8		
	3212GLW			1-1/4"							2.1		
	4014FLW			1-1/2"	Flange	R: 0.59 to 1.18 {6.0 to 12.0} H: 1.08 to 1.77 {11.0 to 18.0}					11.2		
	5020FLWR		Cast Iron	2"						R: 0.74 {7.5}	17.8		
	5020FLWH			2-1/2"						H: 1.23 {12.5}	21.6		
	6524FLWR												
6524FLWH													
MWR-	4014FLW		Bronze	1-1/2"	Flange	0.59 to 1.77 {6.0 to 18.0}				R: 0.74 {7.5}	11.2		
	5020FLWR			2"	R: 0.59 to 1.18 {6.0 to 12.0} H: 1.08 to 1.77 {11.0 to 18.0}	R: 0.74 {7.5}					17.8		
	5020FLWH										2-1/2"	H: 1.23 {12.5}	21.6
	6524FLWR												
	6524FLWH												

* Pressure at which valve starts opening.

• AWR, GWR & MWR with flange connection are supplied with JIS 10K (0.98 MPa) round companion flanges (JIS B2220 2239) and bolts/nuts.

PRESSURE ACTUATED VALVES 3-WAY

Unit: MPa {kgf/cm²}


Catalog No.		Kind of Refrigerant	Valve Body Material	Connection		Press. Range	Max. Working Press.	Max. Water Temp. (°C)	Max. Water Press.	* Factory Setting	Wt. (kg)
				Size	Style						
SWR-	1504GLW	Fluorinated Refrigerants	Bronze	1/2"	Rc	0.59 to 1.77 {6 to 18}	1.96 {20}	60	0.98 {10}	0.74 {7.5}	1.1
	2006GLW			3/4"							1.5
	2510GLW			1"							2.5
	3212GLW			1-1/4"							3.0

* Pressure at which main valve starts opening.

• Pressure range: Main line opening point

VALVE ACTION

Set Point is pressure for valve opening. Each characteristic of valves is different as follows.

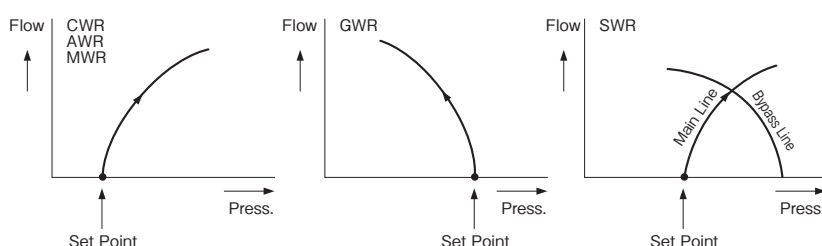

ADJUSTMENT

One full turn of adjusting screw changes pressure setting as shown below.

Catalog No.		Change in Press. Setting
AWR-	1204BLW	Approx. 0.1MPa
	1203GLW	
AWR-GWR-SWR-	1504GLW	Approx. 0.075MPa
	2006GLW	
	2510GLW	
AWR-MWR-GWR-	3212GLW	Approx. 0.09MPa
	4014FLW	
	5020FLW	
	6524FLW	


FLOW CAPACITY

Flow Capacity shows respectively refrigeration press. diff. at horizontal axis and flow rate of cooling water at vertical axis considering water press. diff. before and behind a valve with 0.1 MPa. (press. diff. between inlet and outlet of valve)

In case of water press. diff. before and behind a valve is excepting for 0.1MPa, value is calculated multiplying by coefficient in compensation table.


Type AWR, MWR, GWR

water pressure difference before and behind a valve: 0.1MPa

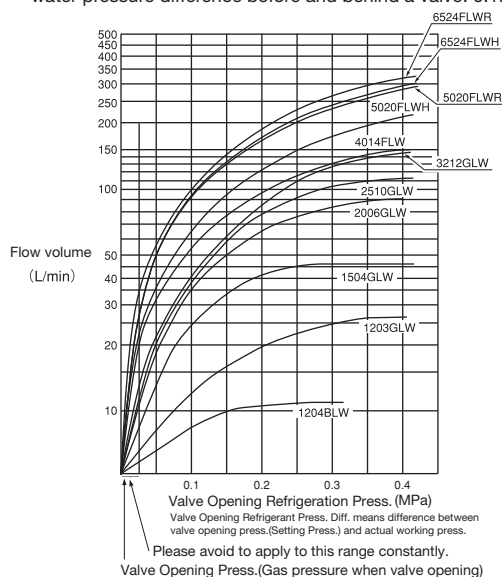


Type SWR

water pressure difference before and behind a valve: 0.1MPa

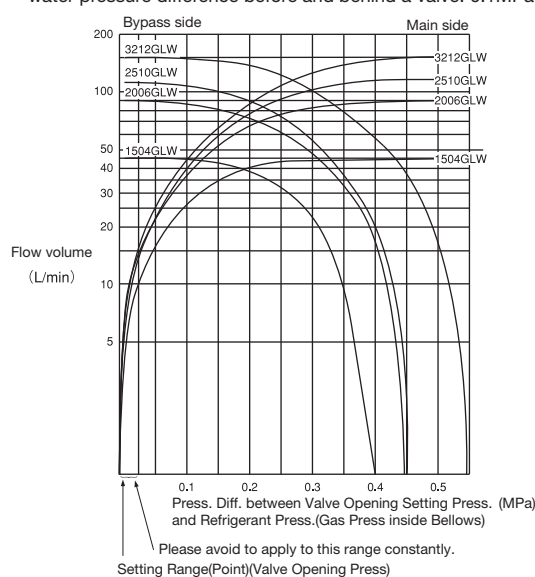

ACCESSORY

- Pressure dampening capillary tube assembly only attached for AWR-50, -65, MWR-50 and -65. Please use these for safety.




COMPENSATION COEFFICIENTS

Press. Drop Across Valve: MPa {kgf/cm ² }	Coefficient
0.2 {2}	1.4
0.1 {1}	1
0.03 {0.3}	0.55
0.05 {0.5}	0.7
0.07 {0.7}	0.8


DIMENSIONS

Type CWR

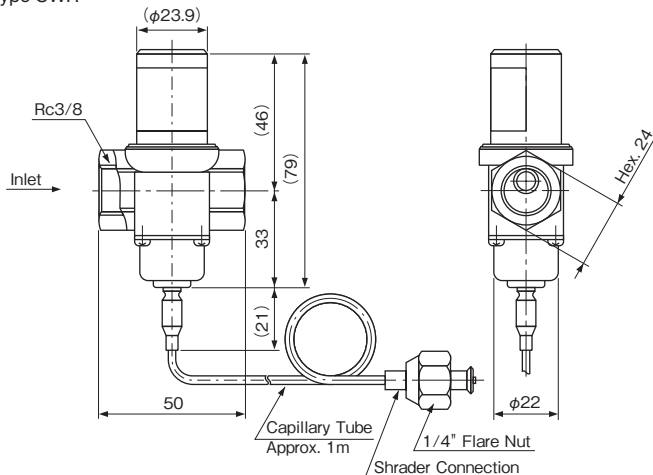


Catalog No.		Unit: mm					
		D	L	H	h	h ₁	□C
AWR-	1204BLW	—	100	90	70	—	40
	1203GLW	22	55	91	72		
AWR-GWR-	1504GLW	27	70	100	83		42
	2006GLW	32	80	104	87		
	2510GLW	40	90	116	97		
AWR-MWR-GWR-	3212GLW	50	100	121	102		59
	4014FLW	—	148	125	105	—	
	5020FLW	—	173	180	155		89
	6524FLW	—	179				
SWR-	1504GLW	27	70	100	31	114	42
	2006GLW	32	80	104	39	126	
	2510GLW	40	90	116	44	141	
	3212GLW	50	100	121	54	156	59


Type AWR-G, GWR-G

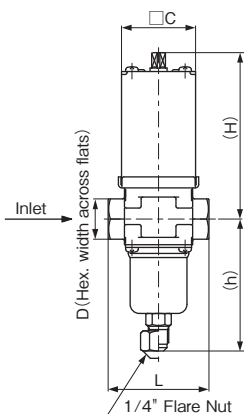

Type AWR-F, MWR-F, GWR-F

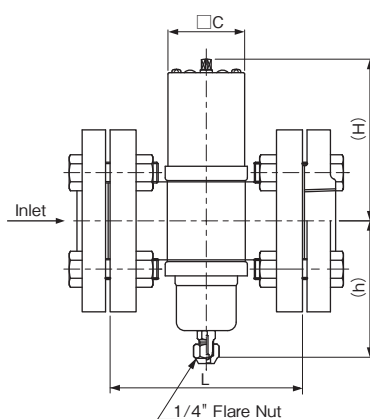

Type SWR

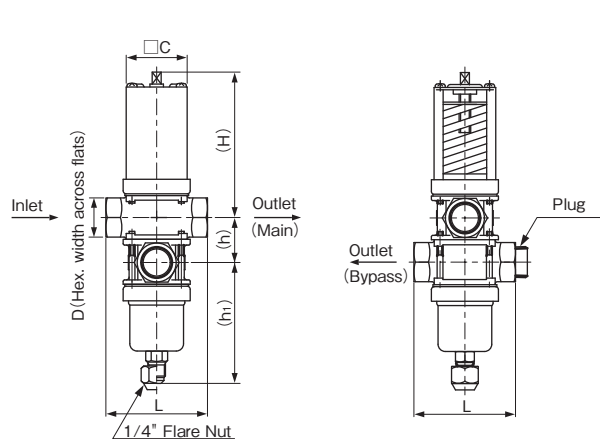

Unit: mm


TEMPERATURE ACTUATED WATER REGULATING VALVES

Type OWR, HWR & XWR

SAGInoMIYA

GENERAL DESCRIPTION

- Type OWR: 2-way temp. actuated water regulating valves, open on temperature increase.
- Type HWR: 2-way temp. actuated water regulating valves, open on temperature decrease.
- Type XWR: 3-way temp. actuated water regulating valves.
- Temperature sensing element (Bulb)
- Body material: Bronze for water and glycol, cast iron for water only

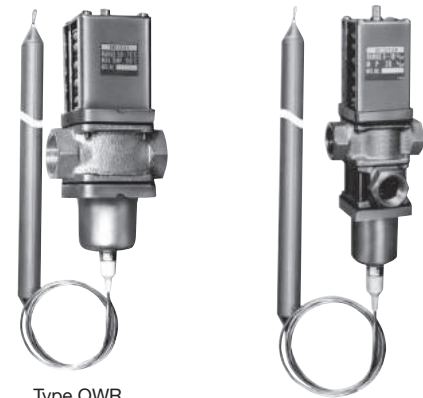

Type OWR

Type XWR

TYPE NUMBER SELECTION (SPECIFICATIONS)

TEMPERATURE ACTUATED VALVES 2-WAY

Unit: °C

Catalog No.		Valve Body Material	Connection		Temp. Range	Max. Water Temp.	Max. Water Press. MPa {kgf/cm ² }	Max. Bulb Temp.	Bulb Size (mm)	* Factory Setting	Wt. (kg)
			Size	Style							
OWR-HWR-	5004G	Bronze	1/2"	Rc	30 to 50	60	0.98 {10}	80	φ 19×150	40	1.0
	5006G		3/4"								1.2
	5010G		1"								2.0
	5012G		1-1/4"								2.2
	5014F	Cast Iron	1-1/2"	Flange	50 to 75			100	φ 19×320	11.5	
	5020F		2"							18.3	
	5024F		2-1/2"							22.2	
	P7504G	Bronze	1/2"	Rc						φ 19×150	60
	P7506G		3/4"						1.2		
	P7510G		1"						2.0		
	P7512G		1-1/4"						2.2		
	P7514F	Cast Iron	1-1/2"	Flange					φ 19×320	11.5	
	P7520F		2"								18.3
	P7524F		2-1/2"								22.2

* Pressure at which valve starts opening.

• OWR & HWR with flange connection are supplied with JIS 10K (0.98 MPa) round companion flanges (JIS B2220 2239) and bolt/nuts.

• Capillary tube ... Standard φ 24mm × 1 meter, optional 1.5, 2 and 3 meters

TEMPERATURE ACTUATED VALVES 3-WAY

Unit: °C


Catalog No.		Valve Body Material	Connection		Temp. Range	Max. Water Temp.	Max. Water Press. MPa {kgf/cm²}	Max. Bulb Temp.	Bulb Size (mm)	* Factory Setting	Wt. (kg)
			Size	Style							
XWR--	5004G	Bronze	1/2"	Rc	30 to 50	60	0.98 {10}	80	φ 19×150	40	1.0
	5006G		3/4"						1.5		
	5010G		1"						2.5		
	5012G		1-1/4"						3.0		
	P7504G		1/2"		50 to 75			100	φ 19×150	60	1.1
	P7506G		3/4"						1.5		
	P7510G		1"						2.5		
	P7512G		1-1/4"						3.0		

* Pressure at which valve starts opening.

• Capillary tube ... Standard φ 24mm × 1 meter, optional 1.5, 2 and 3 meters

VALVE ACTION

Set Point is pressure for valve opening. Each characteristic of valves is different as follows.

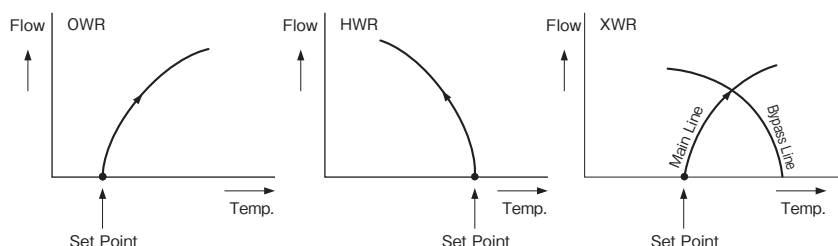

ADJUSTMENT

One full turn of adjusting screw changes temperature setting as shown below.

Catalog No.	Change in Temp. Setting
OWR-HWR-XWR- * * 04G	Approx. 4.0°C
* * 06G	
* * 10G	
* * 12G	Approx. 3.0°C
* * 14F	
OWR-HWR- * * 20F	Approx. 4.0°C
* * 24F	


FLOW CAPACITY

Flow Capacity shows respectively opening temp. diff. at horizontal axis and flow rate of cooling water at vertical axis considering water press. diff. before and behind a valve with 0.1 MPa. (press. diff. between inlet and outlet of valve)

In case of water press. diff. before and behind a valve is excepting for 0.1MPa, value is calculated multiplying by coefficient in compensation table.


Type OWR, HWR

water pressure difference before and behind a valve: 0.1MPa

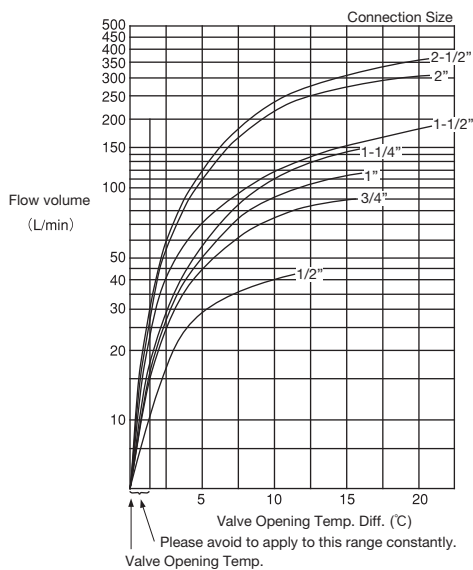


Type XWR

water pressure difference before and behind a valve: 0.1MPa

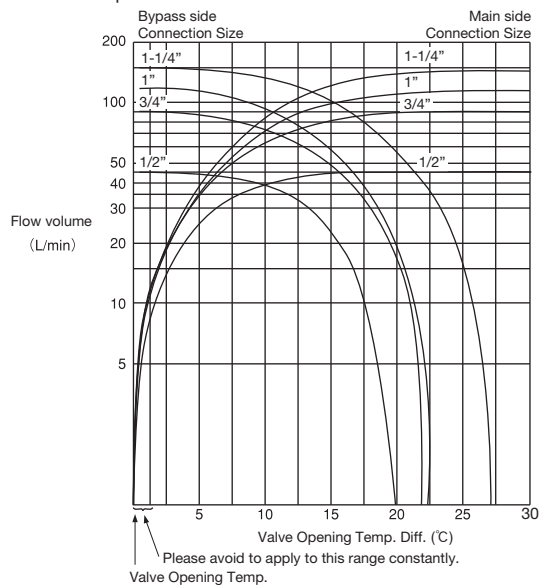


DIMENSIONS


Type OWR-G, HWR-G

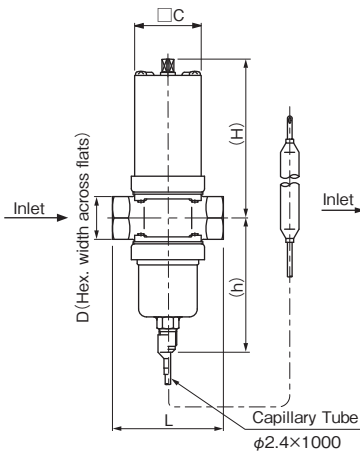

Type OWR-F, HWR-F

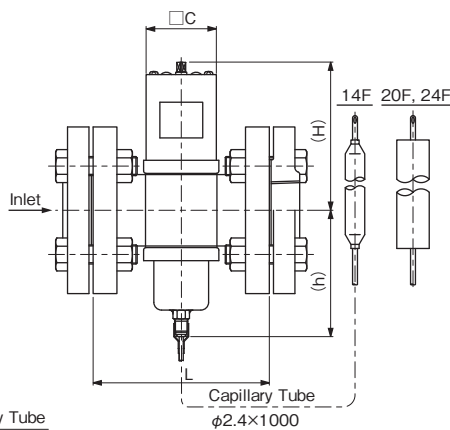

Type XWR

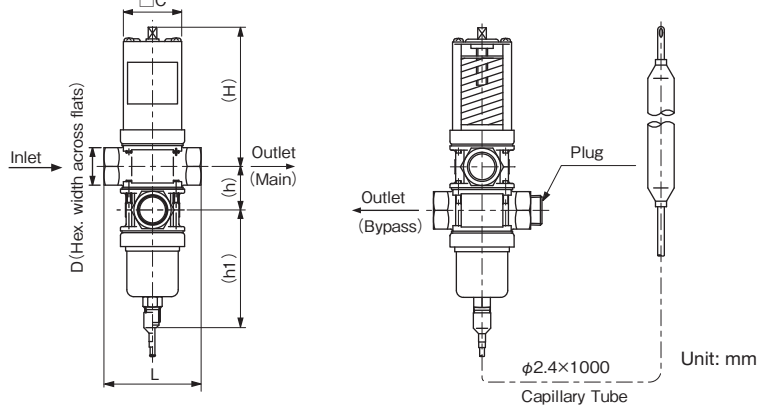

COMPENSATION COEFFICIENTS

Press. Drop Across Valve: MPa {kgf/cm ² }	Coefficient
0.2 {2}	1.4
0.1 {1}	1
0.03 {0.3}	0.55
0.05 {0.5}	0.7
0.07 {0.7}	0.8

Catalog No.		Unit: mm				
		D	L	H	h	□C
OWR-HWR-	5004G	27	70	100	83	42
	5006G	32	80	104	87	
	5010G	40	90	116	97	
	5012G	50	100	121	102	
	5014F	—	148	125	105	59
	5020F	—	173	180	155	
	5024F	—	179	180	155	
	P7504G	27	70	100	83	42
	P7506G	32	80	104	87	
	P7510G	40	90	116	97	
	P7512G	50	100	121	102	
	P7514F	—	148	125	106	59
	P7520F	—	173	180	155	
	P7524F	—	179	180	155	89

Catalog No.		Unit: mm					
		D	L	H	h	h ₁	□C
XWR-	5004G	27	70	100	31	114	42
	5006G	32	80	104	39	126	
	5010G	40	90	116	44	141	59
	5012G	50	100	121	54	156	
	P7504G	27	70	100	31	114	42
	P7506G	32	80	104	39	126	
	P7510G	40	90	116	44	141	59
	P7512G	50	100	121	54	156	

PRESSURE REGULATING VALVES

Type EPR

SAGINOMIYA

GENERAL DESCRIPTION

- Direct operated, 2-way valves designed for maintaining suitable evaporating pressure in refrigeration. Fitted at the evaporator outlet to keep suitable set evaporating pressure.



Type EPR-B



Type EPR-D

SPECIFICATIONS

Operation	Direct Operation type
Specifications	
Max. Working Pressure	2.5MPa {25kgf/cm ² }
Airtight Test Pressure	3MPa {30kgf/cm ² }
Fulid Temp.	to 100°C
Pressure Adjustment	○ Increase 1604 to 05: 0.08MPa {Approx.0.82kgf/cm ² } /rotation 1905 to 07: 0.05MPa {Approx.0.51kgf/cm ² } /rotation

TYPE NUMBER SELECTION

Catalog No.		Equalization	Port size (mm)	Nominal Capacity (U.S.R.T.) {kW}				Adjusting Range (MPa) {kgf/cm ² }	Connection		Factory Setting (MPa) {kgf/cm ² }	Wt. (kg)
				CT 38°C ΔP0.074MPa {0.75kgf/cm ² } ET 5°C								
Type	Model			R22	R134a	R404A	R407C		Style	Copper Tube (O.D.)		
EPR-	1604B	Internal	15	2.6 {9.1}	1.5 {5.3}	1.9 {6.7}	2.0 {6.9}	0 to 0.6 {0 to 6}	Flare	1/2"	0.3 {3}	0.3
	1605B									5/8"		
	1905B		20	5.5 {19}	3.5 {12}	4.1 {14}	5.4 {19}			3/4"		
	1906B								12.7	0.2		
	1604D		15	2.6 {9.1}	1.5 {5.3}	1.9 {6.7}	2.0 {6.9}		Solder			15.88
	1605D									19.05		0.4
	1905D		20	5.5 {19}	3.5 {12}	4.1 {14}	5.4 {19}			22.23		
	1906D											
	1907D											

- Nominal capacity is based on condensing temp. 38°C, evaporating temp. 5°C, pressure drop across the valve 0.074 MPa {0.75kgf/cm²}, and Set Pressure R134a...0.1MPa {1kgf/cm²}, R22, R407C...0.2MPa {2kgf/cm²}, R404A...0.3MPa {3kgf/cm²}

APPLICATION EXAMPLE


•Evaporating pressure regulating valve type EPR

At multi evaporator system, evaporating pressure regulating valves are used to control each different pressure (temperature) of evaporators.

Compressor operates based on the lowest pressure (temperature) of evaporators, pressure regulating valves keep pressure (temperature) of each evaporator at their setting pressure.


In this case, a check valve is required at the outlet of lowest pressure evaporator.

Also, evaporating pressure regulating valve is used at water chiller for prevent form congelation of cool water and vegetable warehouse for prevents form over dehumidification.

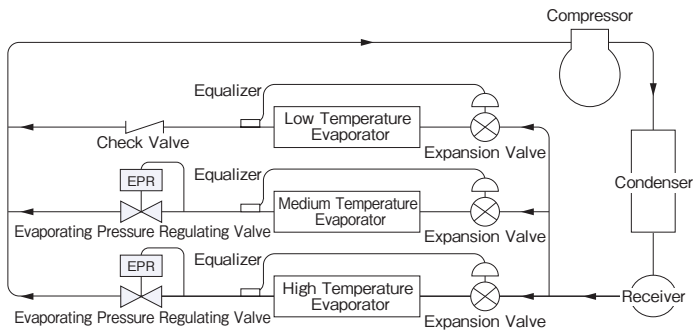


DIMENSIONS

Type EPR-B

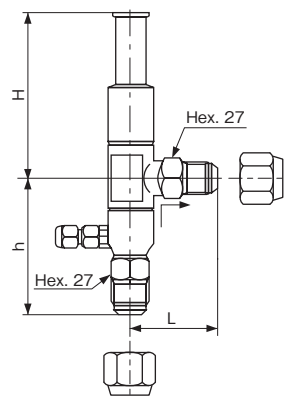

Type EPR-D

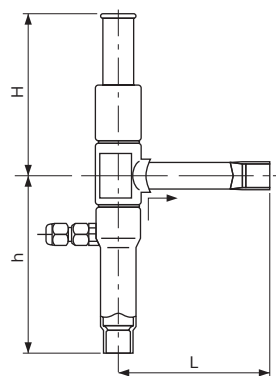

Unit: mm

Catalog No.		Unit: mm		
Type	Model	L	H	h
EPR-	1604B	45	82	91
	1605B	53		94
	1905B	56		100
	1906B	60	109	105
	1604D	71	82	78
	1605D			
	1905D	100	109	120
	1907D			

PRESSURE REGULATING VALVES

High Volume OEM Item (Type DPR)

Type SPR & DPR

SAGINOMIYA

GENERAL DESCRIPTION

- Type SPR ... Direct operated, 2-way valves, designed for maintaining suitable compressor suction pressure in refrigeration or air conditioning units.

Fitted in suction line after the evaporator to prevent compressor overload.

- Type DPR ... Fitted in by-pass line between compressor discharge and suction line in refrigeration or air conditioning units. (Quantity order only.)

Senses excessive compressor discharge pressure and releases it through the bypass line to the low pressure side to protect the compressor from overloading.

Reduces frequency of cut-in and cut-out of high pressure switch to keep the compressor operating.

A typical advantage is in the heating cycle of heat pump systems during spring or autumn, or at the time when filter is clogged with foreign materials.



Type SPR-B



Type SPR-D



Type DPR

SPECIFICATIONS (Type SPR)

Operation Specifications	Standard model	Set pressure range wide model
Max. Working Pressure	2.5MPa {25kgf/cm ² }	
Airtight Test Pressure	3MPa {30kgf/cm ² }	
Fulid Temp.	to 100°C	
Pressure Adjustment	○ Increase 1604 to 05: Approx. 0.08MPa {0.82kgf/cm ² } /rotation 1905 to 07: Approx. 0.05MPa {0.51kgf/cm ² } /rotation 3011 to 13: Approx. 0.03MPa {0.31kgf/cm ² } /rotation	○ Increase 1604 to 05: Approx. 0.13MPa {1.33kgf/cm ² } /rotation 1905 to 07: Approx. 0.07MPa {0.71kgf/cm ² } /rotation 3011 to 13: Approx. 0.04MPa {0.41kgf/cm ² } /rotation

TYPE NUMBER SELECTION

Type SPR – Standard model

Catalog No.		Fluid	Port Size (mm)	Nominal Capacity (U.S.R.T.) {kW}				Connection		Wt. (kg)
				CT38°C ΔP0.049MPa {0.5kgf/cm²} ET—10°C						
Type	Model			R22	R134a	R404A	R407C	Copper Tube (O.D.)	Style	
SPR-	1604B	Fluorinated Refrigerants	15	1.4 {4.9}	0.9 {3.2}	1.1 {3.9}	1.3 {4.7}	1/2"	Flare	0.3
	1605B							5/8"		
	1905B							3/4"		
	1906B		20	3.0 {10.5}	1.8 {6.3}	2.5 {8.8}	3.1 {10.9}	1/2"	Solder	0.2
	1604D							5/8"		
	1605D							3/4"		
	1905D		20	3.0 {10.5}	1.8 {6.3}	2.5 {8.8}	3.1 {10.9}	7/8"		0.4
	1906D							1-1/8"		
	1907D							1-3/8"		
	3011D		29	5.0 {17.6}	2.7 {9.5}	4.5 {15.8}	5.4 {19.1}			1.3
3013D										

• Nominal capacity is based on condensing temp. 38°C, evaporating temp. – 10°C, pressure drop across the valve 0.049 MPa {0.5kgf/cm²}, and Set Pressure R134a...0.2MPa {2kgf/cm²}, R22,R407C...0.4MPa {4kgf/cm²}, R404A...0.5MPa {5kgf/cm²}.

Type SPR – Set pressure range wide model

Catalog No.		Fluid	Port Size (mm)	Nominal Capacity (U.S.R.T.) {kW}	Connection		Wt. (kg)
				CT38°C ΔP0.049MPa {0.5kgf/cm²} ET—10°C			
Type	Model			R404A	Copper Tube (O.D.)	Style	
SPR-	1604BW	15	1.08 {3.8}	1/2"	Flare	0.3	
	1605BW			5/8"			
	1905BW			3/4"			
	1906BW	20	2.1 {7.4}	1/2"	Solder	0.2	
	1604DW			5/8"			
	1605DW			3/4"			
	1905DW	20	2.1 {7.4}	7/8"		0.4	
	1906DW						
	1907DW						
	3011DW	29	4.04 {14.2}	1-1/8"		1.3	
3013DW	1-3/8"						

• Nominal capacity is based on condensing temp. 38°C, evaporating temp. – 10°C, pressure drop across the valve 0.049 MPa {0.5kgf/cm²}, and Set Pressure 0.5MPa {5kgf/cm²}.

Type DPR


Catalog No.		Fluid	Port Size (mm)	* Factory Adjustable Range (MPa)	Connection (mm)		Max. Working Press. (MPa) {kgf/cm ² }	Wt. (kg)
Type	Model				Tube (I.D.)	Style		
DPR-	343D	Fluorinated Refrigerants	3.4	0.98 to 2.45	7.94	Solder	2.9 {29}	0.11

The drawing exchange is necessary for the instruction of working pressure setting. Please contact us before order.

APPLICATION EXAMPLE


• Suction pressure regulating valve type SPR

Suction pressure regulating valve is installed between compressor and evaporator in order to keep outlet pressure (suction pressure) under it's setting. In case of rapid increase of load, suction pressure regulating valve could be used to prevent from overload of electric motor for compressor.

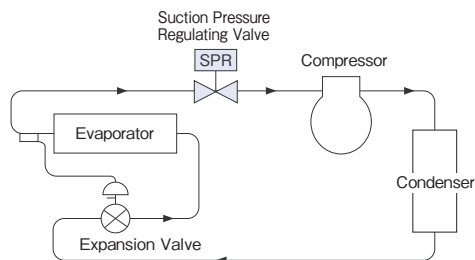


• Discharge pressure regulating valve type DPR

Discharge pressure regulating valve is mounted in the low-pressure side bypass piping from the discharge piping of a compressor as a control valve to control the discharge pressure to be lower than the specified pressure for the purpose of preventing the compressor from being an abnormal high pressure.

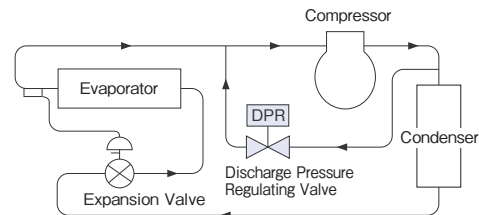


DIMENSIONS

Type SPR-B

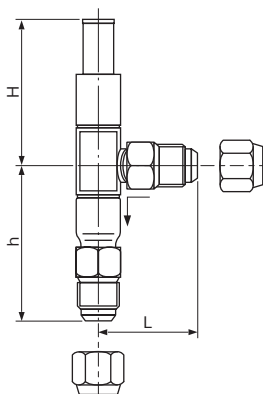


Type SPR-D

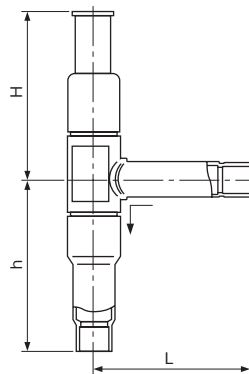

Catalog No.		Unit: mm		
Type	Model	L	H	h
SPR-	1604B	45	82	91
	1605B	53		94
	1905B	56	109	100
	1906B	60		105
	1604D	71	82	78
	1605D			
	1905D	100	109	120
	1906D			
	1907D			
	3011D	140	147	170
	3013D			

Type DPR

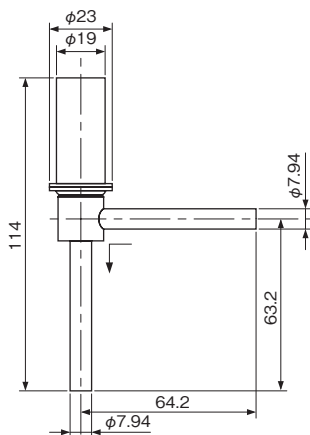

Unit: mm

PRESSURE REGULATING VALVES

Type HPR

SAGINOMIYA

GENERAL DESCRIPTION

- Type HPR can control the condensing pressure corresponding to the change in the outside temperature, and prevents the condensation pressure decrease in the control in winter, also steady throughout the year control is possible.
- This product properly maintains the inlet pressure of the expansion valve and prevents the decrease in the refrigeration capacity.
- Suitable for refrigeration systems with hot gas defrosting.



SPECIFICATIONS

Max. Working Pressure: 2.9MPa {29kgf/cm²} (R22, R134a, R404A, R407C)

4.17MPa {41.7kgf/cm²} (R410A)

Airtight Test Pressure: 3.5MPa {35kgf/cm²} (R22, R134a, R404A, R407C)

4.17MPa {41.7kgf/cm²} (R410A)

Fluid Temperature: to 125°C

TYPE NUMBER SELECTION

Catalog No.			Port size (mm)	Connection		Factory Setting (MPa)	Wt. (kg)
Type	Model	Refrigerant		Copper Tube (O.D.)	Style		
HPR-	1304D [B]	H (R22) M (R134a) U (R404A) P (R407C) V (R410A)	13	1/2"	Copper Tube O.D. [Flare]	1.32 (H,U,P) 0.686 (M) 2.15 (V)	0.76
	1305D [B]			5/8"			
	2207D		22	7/8"			1.65

• Flare type is produced only 5/8 and 1/2.

• R410A type is produced only 5/8 and 1/2.

CAPACITY TABLE

Nominal capacity is based on condensing temp. 38°C, evaporating temp. 5°C, and Supercooling temp. 0°C.

R22

Catalog No.		Port size (mm)	Capacity (U.S.R.T.) {kW}							
			R22							
Type	Model		Pressure drop across the valve (MPa) {kgf/cm²}							
			0.005 {0.05}	0.01 {0.1}	0.015 {0.15}	0.02 {0.2}	0.025 {0.25}	0.03 {0.3}	0.035 {0.35}	0.04 {0.4}
HPR-	1304D [B] H	13	5.97 {21.0}	8.50 {29.9}	10.4 {36.5}	12.0 {42.2}	13.4 {47.1}	15.2 {53.5}	16.1 {56.6}	17.0 {59.8}
	1305D [B] H									
	2207DH	22	14.7 {51.7}	20.8 {73.1}	25.6 {90.0}	29.6 {104}	33.0 {116}	36.1 {127}	39.0 {137}	41.8 {147}

R134a

Catalog No.		Port size (mm)	Capacity (U.S.R.T.) {kW}							
			R134a							
Type	Model		Pressure drop across the valve (MPa) {kgf/cm²}							
		0.005 {0.05}	0.01 {0.1}	0.015 {0.15}	0.02 {0.2}	0.025 {0.25}	0.03 {0.3}	0.035 {0.35}	0.04 {0.4}	
HPR-	1304D [B] M	13	5.94 {20.9}	8.47 {29.8}	10.4 {36.4}	12.0 {42.2}	13.3 {46.9}	15.1 {53.1}	16.0 {56.1}	16.9 {59.4}
	1305D [B] M									
	2207DM	22	14.6 {51.5}	20.7 {72.8}	25.5 {89.5}	29.3 {103}	33.0 {116}	35.8 {126}	39.0 {137}	41.8 {147}

R404A

Catalog No.		Port size (mm)	Capacity (U.S.R.T.) {kW}							
			R404A							
Type	Model		Pressure drop across the valve (MPa) {kgf/cm²}							
		0.005 {0.05}	0.01 {0.1}	0.015 {0.15}	0.02 {0.2}	0.025 {0.25}	0.03 {0.3}	0.035 {0.35}	0.04 {0.4}	
HPR-	1304D [B] U	13	3.90 {13.7}	5.23 {18.4}	6.74 {23.7}	7.88 {27.7}	8.73 {30.7}	9.87 {34.7}	10.5 {36.8}	11.0 {38.7}
	1305D [B] U									
	2207DU	22	9.58 {33.7}	13.6 {47.7}	16.7 {58.7}	19.3 {67.8}	21.6 {75.8}	23.6 {82.9}	25.5 {89.6}	27.3 {95.9}

R407C

Catalog No.		Port size (mm)	Capacity (U.S.R.T.) {kW}							
			R407C							
Type	Model		Pressure drop across the valve (MPa) {kgf/cm²}							
			0.005 {0.05}	0.01 {0.1}	0.015 {0.15}	0.02 {0.2}	0.025 {0.25}	0.03 {0.3}	0.035 {0.35}	0.04 {0.4}
HPR-	1304D [B] P	13	6.14 {21.6}	8.76 {30.8}	10.7 {37.6}	12.4 {43.5}	13.8 {48.5}	15.7 {55.1}	16.6 {58.3}	17.5 {61.6}
	1305D [B] P									
	2207DP	22	15.1 {53.1}	21.4 {75.1}	26.3 {92.4}	30.4 {107}	33.8 {119}	37.0 {130}	40.1 {141}	42.9 {151}


R410A

Catalog No.		Port size (mm)	Capacity (U.S.R.T.) {kW}							
			R410A							
Type	Model		Pressure drop across the valve (MPa) {kgf/cm ² }							
			0.005 {0.05}	0.01 {0.1}	0.015 {0.15}	0.02 {0.2}	0.025 {0.25}	0.03 {0.3}	0.035 {0.35}	0.04 {0.4}
HPR-	1304D [B] V	13	6.57 {23.1}	9.36 {32.9}	11.4 {40.2}	13.2 {46.4}	14.7 {51.8}	16.8 {58.9}	17.7 {62.3}	18.7 {65.8}
	1305D [B] V									

APPLICATION EXAMPLE


This product can control the condensing pressure corresponding to the change in the outside temperature, and prevents the condensing pressure decrease in the control in the winter, also steady throughout the year control is possible.

This product properly maintains the inlet pressure of the expansion valve and prevents the decrease in the refrigeration capacity. Suitable for use in refrigeration systems with hot gas defrosting and in extremely cold region.

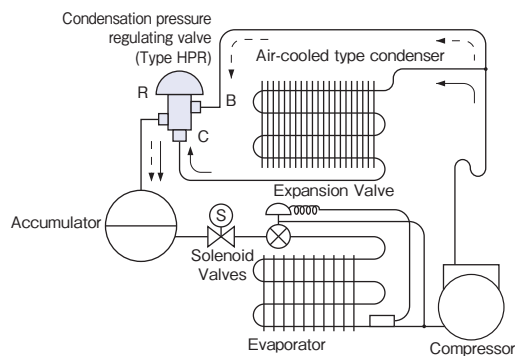

- Condensing Pressure higher than the set value (summer) C→R
- Condensing Pressure lower than the set value (winter) B→R

DIMENSIONS

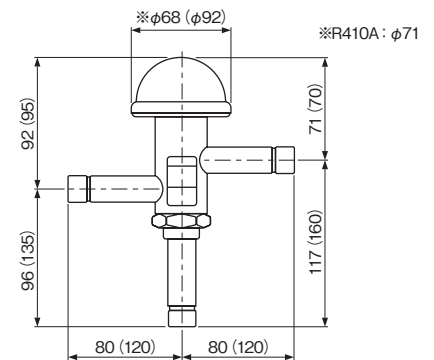

Type HPR-1304 to 1305D
(Type HPR-2207D)

Unit: mm

DIAPHRAGM TYPE STOP VALVES

Type ADV

SAGINOMIYA

GENERAL DESCRIPTION

- The valve can be used on the lines of delivery gas, liquid, suction gas and hot gas, etc.
- The valve is applicable to not only Fluorinated refrigerants, but also air.
- In spite of its compactness and light weight, the port diameter is comparatively large to enable to flow a large amount.
- The large diameter handle makes easy and smooth rotation even in vacuum condition.
- Carefully processed valve with selected material provides long trouble free service and dependable operation.
- Type ADV cannot be used in a reverse flow.



Type ADV-B




Type ADV-D

TYPE NUMBER SELECTION (SPECIFICATIONS)


Unit: MPa {kgf/cm²}

Catalog No.		Port Size (mm)	Cv Value	Connection		Max. Working Pressure	Fluid Temp. (°C)	Wt. (kg)
				Copper Tube (O.D.)	Style			
ADV-	902BY	9	0.35	1/4"	Flare	3.6 {36}	-40 to 120	0.26
	903BY		0.79	3/8"				0.32
	1404BY	14	1.61	1/2"				0.51
	1605BY	16	2.82	5/8"				0.85
	1606BY		3.46	3/4"				1.13
	902DY	9	0.35	1/4" (6.35)	Solder			0.24
	903DY		0.79	3/8" (9.53)				0.28
	1404DY	14	1.61	1/2" (12.7)				0.46
	1605DY	16	2.82	5/8" (15.88)				0.76
	1606DY		3.46	3/4" (19.05)				0.91
	1607DY			7/8" (22.23)				

DIMENSIONS

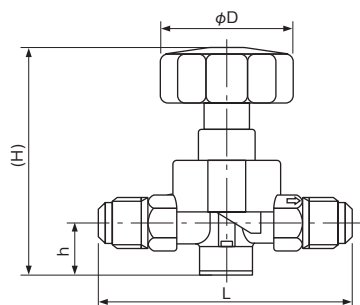

Type ADV-BY

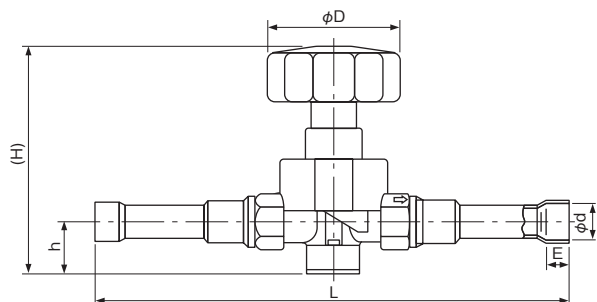

Type ADV-DY

Unit: mm

Catalog No.		Unit: mm					
		L	H	h	φD	φd	E
ADV-	902BY	80	75	20	52	—	—
	903BY	85	75.5	19.5			
	1404BY	101	87.5				
	1605BY	128	98	23	70		
	1606BY	135	102	25			
	902DY	165	75	20	52	6.5	8
	903DY		75.5	19.5		9.65	
	1404DY		87.5			12.95	
	1605DY	200	98	23	70	16.15	12
	1606DY		102	25		19.3	14
	1607DY					22.45	

BELLOWS TYPE STOP VALVES

Type NBV

SAGINO MIYA

GENERAL DESCRIPTION

- The valve is a bellows seal type stop valve.
- There is no external leakage from the ground part.
- It can be used for fluorocarbon refrigerant circuits such as R22, R134a, R404A, compressed air etc.
- Fluid Temperature: — 30 to 120°C



TYPE NUMBER SELECTION


Flare Type

Catalog No.			Port Size (mm)	Cv Value	Connection		Wt. (kg)
Type	Model	Pressure class (Max.Working Pressure) (Mpa)			Size	Style	
NBV-	502B	X (2.94)	5	0.36	1/4"	Flare (JIS B8607)	0.3
	803B		7.5	0.82	3/8"		0.4
	1004B		10	1.4	1/2"		0.6
	1305B		13	2.4	5/8"		0.8
	1606B		16	4.2	3/4"		1.2
	502AMB		5	0.39	1/4"	Inlet R Outlet Flare (JIS B8067)	0.3
	803AMB		7.5	0.89	3/8"		0.4
NBV-	502B	Y (3.53)	5	0.36	1/4"	Flare (JIS B8607)	0.3
	803B		7.5	0.82	3/8"		0.4
	1004B		10	1.4	1/2"		0.6
	1305B		13	2.4	5/8"		0.8
	1606B		16	4.2	3/4"		1.2
	502AMB		5	0.39	1/4"	Inlet R Outlet Flare (JIS B8067)	0.3
	803AMB		7.5	0.89	3/8"		0.4


Pipe Thread Type

Catalog No.			Port Size (mm)	Cv Value	Connection		Wt. (kg)
Type	Model	Pressure class (Max.Working Pressure) (Mpa)			Size	Style	
NBV-	802G	X (2.94)	7.5	0.8	1/4"	Rc	0.3
	1003G		10	1.4	3/8"		0.4
	1304G		13	2.9	1/2"		0.6
	2006G		20	6.7	3/4"		1.1
	802AG		7.5	0.8	1/4"		0.3
	1003AG		10	1.5	3/8"		0.4
	1304AG		13	3.1	1/2"		0.6
	2006AG		20	7.3	3/4"		1.1
NBV-	802G	Y (3.53)	7.5	0.8	1/4"	Rc	0.3
	1003G		10	1.4	3/8"		0.4
	1304G		13	2.9	1/2"		0.6
	2006G		20	6.7	3/4"		1.1
	802AG		7.5	0.8	1/4"		0.3
	1003AG		10	1.5	3/8"		0.4
	1304AG		13	3.1	1/2"		0.6
	2006AG		20	7.3	3/4"		1.1


DIMENSIONS




Type NBV-B



Type NBV-AMB



Type NBV-G



Type NBV-AG

Catalog No.		L	H	h
NBV-	502B	60	61	12
	803B	70	65	15
	1004B	90	78	17
	1305B	100	85	18
	1606B	110	88.5	26
	502AMB	35	55	30
	803AMB	40	65	40
	802G	54	65	-
	1003G	60	78	
	1304G	65	79	
	2006G	80	105	
	802AG	24	58	24
	1003AG	28	71	28
	1304AG	33	73	33
	2006AG	40	105	40

Unit: mm



OTHER CONTROL EQUIPMENT

FLOW SWITCHES 116
Type **FQS**
CONDENSER FAN SPEED CONTROLLERS 119–120
Type **RGE**
CONDENSER FAN SPEED CONTROLLERS 121
Type **XGE**
TEMPERATURE RECORDERS 122
Type **AKM & BKM**
CO₂ REFRIGERANT APPLICATIONS 125–127
Type **CCB, HSK, HPV, UKV–J & JKV**
BELLOWS 128
Type **HBL & WSL**
OTHER CONTROLS & VALVES 129
Type **RKV & BI-METAL (No. 03, 05 & 24)**

FLOW SWITCHES

Type FQS

SAGINO MIYA

GENERAL DESCRIPTION

- For use on liquid lines such as water, ethylene glycol, or any non-corrosive fluid in chillers, pumps, condensers, boilers, etc.
- With S.P.D.T. contact mechanism.
- Paddle consists of three segments that can be removed or trimmed for use in 1 to 6" pipe.
- Drip proof models: Available upon request.

CE mark applicable (available upon request)

UL listed (available upon request)



SPECIFICATIONS


Catalog No.	Paddle Size	Connection		Max. Working Pressure MPa{kgf/cm ² }	Fluid Temp. (°C)	Max. Flow Velocity (m/s)	Wt. (kg)
		Size	Style				
FQS-U30G	1"+2"+3"	1"	R	0.98 {10}	5 to 80	2	0.6

• Enclosure: IP20 (IP62 model: available upon request.)

ELECTRICAL RATINGS

Rated Voltage (V)		Power Factor (cos ϕ)	125V. AC	250V. AC
Rated Current (A)				
Non-Inductive Current		1	15	15
Inductive Current	Full Load	0.75	3.5	2.5
	Locked Rotor	0.45	21	15

DIMENSIONS

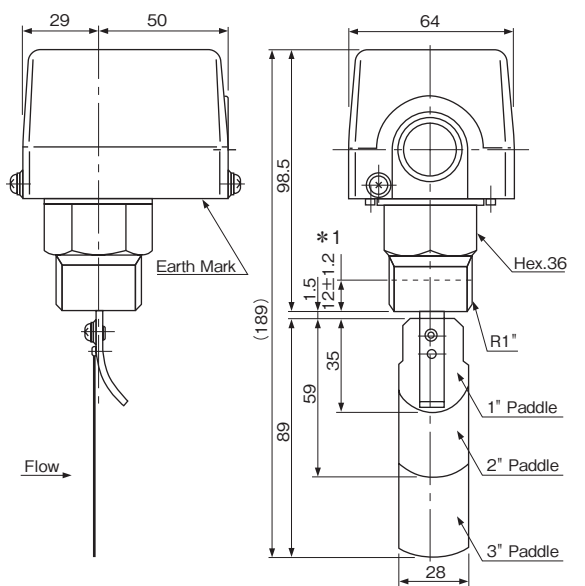

* 1 Connection screwed length to a Tee joint is 12 ± 1.2mm. Unit: mm

OPERATION ADJUSTMENT RANGE TABLE

- When the operating value is not specified, the flow switch is shipped with the operating value set around the minimum flow rate.
- When you turn the flow adjusting screw clockwise, the operating point goes up. When you turn it counterclockwise, the operating point goes down.
- When more than two paddles is attached, you can change the flow rate adjustment range by removing the paddles one by one in order of the longer paddle first.

Pipe Size	Paddle Size	* 2 Adjustment range (L/min)			
		Min.		Max.	
		Flow Decrease	Flow Increase	Flow Decrease	Flow Increase
1"	1"	18	28	45	55
1-1/4"		43	53	100	120
1-1/2"		63	78	135	162
2"	1"+2"	50	65	150	180
2-1/2"	1"	151	181	220	264
	1"+2"	105	126	355	426
3"	1"	356	427	360	432
	1"+2"	226	271	480	576
	1"+2"+3"	100	120	225	270
4"	1"	821	985	870	1044
	1"+2"	386	463	820	984
	1"+2"+3"	200	240	385	462
5"	1"	1266	1519	1342	1610
	1"+2"	595	714	1265	1518
	1"+2"+3"	350	420	594	713
6"	1"	1781	2137	1890	2268
	1"+2"	837	1004	1780	2136
	1"+2"+3"	530	636	836	1003

* 2 Flow decrease ... Flow amount at which the switch operates on flow decrease.
Flow increase ... Flow amount at which the switch operates on flow increase.

CONDENSER FAN SPEED CONTROLLERS

Type RGE

SAGInoMIYA

GENERAL DESCRIPTION

- The most suitable for controlling the condenser fan speed of freezing or refrigeration condensing units, package air conditioners, or other units which are operated throughout the year.
- Keep condensing pressure constant in winter and intermediate seasons for stable operation.
- Following modes are selectable during low-speed operation.
Minimum Speed Operation
Cut off Operation
- Excellent electrical noise-resistant design.
- Applicable to the external forced operation switch.

CE mark applicable

SP_{US} listed (available upon request)



Single-phase type



Three-phase type

SPECIFICATIONS

- Max. working pressure: 4.7MPa
- Control method: Phase control
- Enclosure: IP54

TYPE NUMBER SELECTION

Catalog No.	*1 F.V.S. Setting (MPa)			*2 E.P.B. (MPa)	Refrigerants	Electrical Ratings		Function	Ambient Temp. (°C)	Operation	Wt. (kg)	
	Factory Set	Adjusting Range				Ampere						
		Min.	Max.									
RGE-Z1L4-7	1.9	0.8	2.8	Fixed 0.6	R22, R404A, R407C	Single phase 200 to 240V. AC 50/60Hz	0.2 to 3A	At approx. 45% (50Hz) at approx. 35% (60Hz) Cut Off or Minimum Speed function is selectable with changeover switch.	-20 to 55	①	0.36	
RGE-Z1L6-7	3.2	1.6	3.9	Fixed 0.9	R410A		0.2 to 4A				0.5	
RGE-Z1N4-7	1.9	0.8	2.8	Fixed 0.4	R22, R404A, R407C		0.2 to 6A				0.54	
RGE-Z1N6-7	3.2	1.6	3.9	Fixed 0.8	R410A		0.2 to 8A	Default setting: Cut Off			0.58	
RGE-Z1P4-7	1.9	0.8	2.8	Fixed 0.4	R22, R404A, R407C							
RGE-Z1P6-7	3.2	1.6	3.9	Fixed 0.8	R410A							
RGE-Z1Q4-7	1.9	0.8	2.8	Fixed 0.4	R22, R404A, R407C							
RGE-Z1Q6-7	3.2	1.6	3.9	Fixed 0.8	R410A							
RGE-Z3R4-7	1.6	0.8	2.8	Fixed 0.4	R22, R404A, R407C	Three phase 200 to 240V. AC 50/60Hz	0.2 to 5A	At approximately 35%, Cut Off or Minimum Speed function is selectable with changeover switch. Default setting: Min. Speed	-20 to 50	②	1.4	
RGE-Z3R6-7	3.2	1.6	3.9	Fixed 0.8	R410A		0.2 to 7A				1.53	
RGE-Z3T4-7	1.6	0.8	2.8	Fixed 0.6	R22, R404A, R407C							
RGE-Z3T6-7	3.2	1.6	3.9	Fixed 0.8	R410A	Three phase 380 to 415V. AC 50/60Hz	0.2 to 5A		-15 to 50		1.4	
RGE-X3R4-7	1.6	0.8	2.8	Fixed 0.4	R22, R404A, R407C							
RGE-X3R6-7	3.2	1.6	3.9	Fixed 0.8	R410A							

* 1: The pressure at which the control delivers 95% output effective voltage (VRMS).

* 2: Pressure width where effective voltage corresponds to the minimum speed or causes cut off operation


• Min. speed: Fan motor will be kept running at the specific value (V%) when pressure band increase more than E.P.B.

• Cut off: Fan motor will be stopped when pressure decrease to the specific value (V%) for R.M.S.


• For other pressure set values or min. speed/cut off set values, please contact us.

OPERATION

① Single-phase type

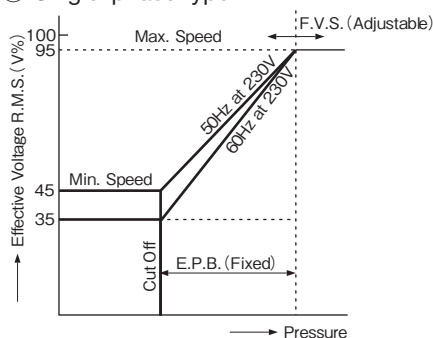

② Three-phase type

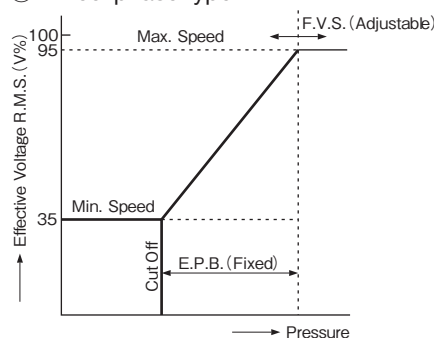


The operating characteristics may vary according to the voltage, frequency, and fan motor characteristics.


WIRING

Single-phase type


for 2A (RGE-Z1)

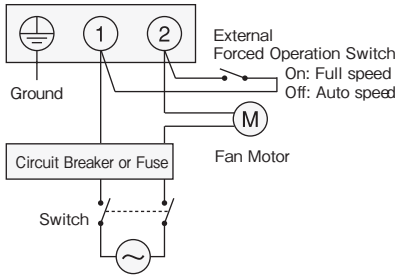

for 4A, 6A, 8A (RGE-Z1)

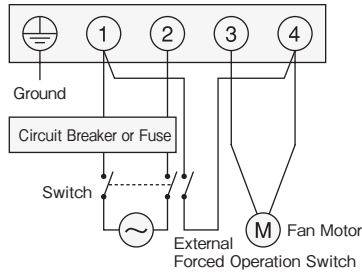





Three-phase type

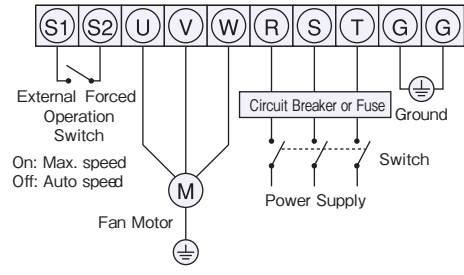




Use external forced operation switch that is able to reduce current consumption of fan motors. Use a forced operation switch with non-voltage contact signal.

DIMENSIONS

Single-phase type

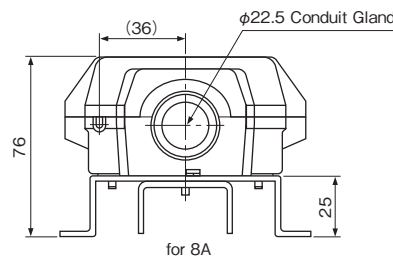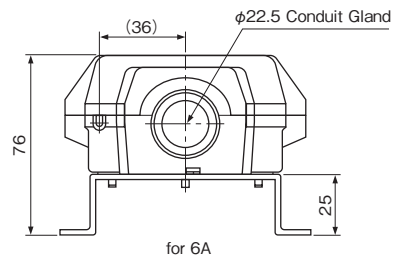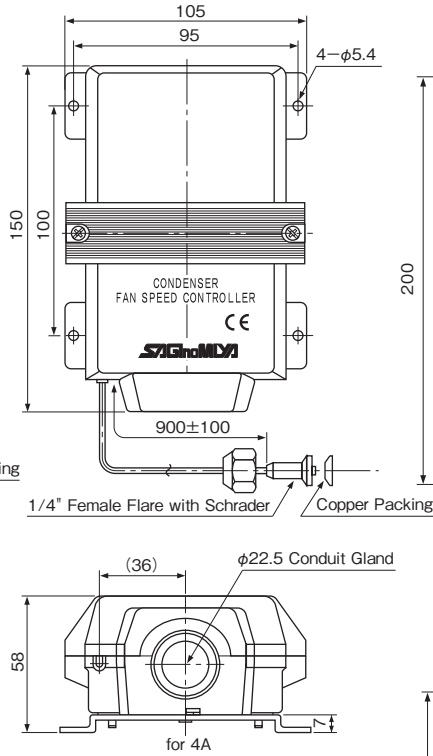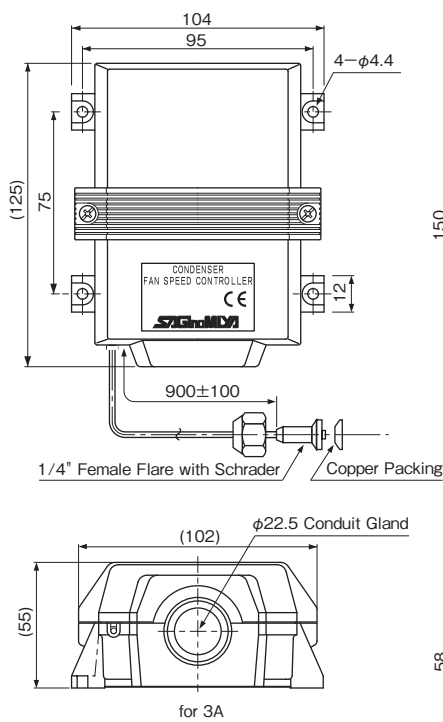

Three-phase type

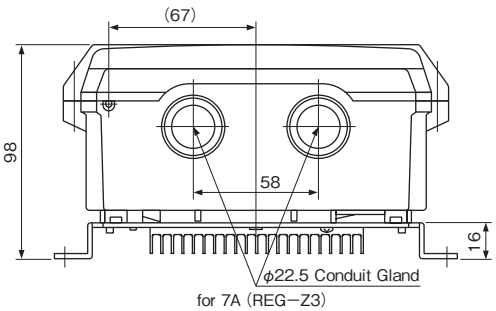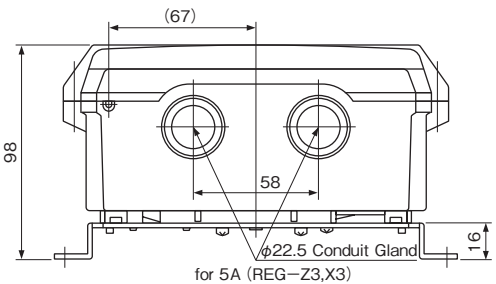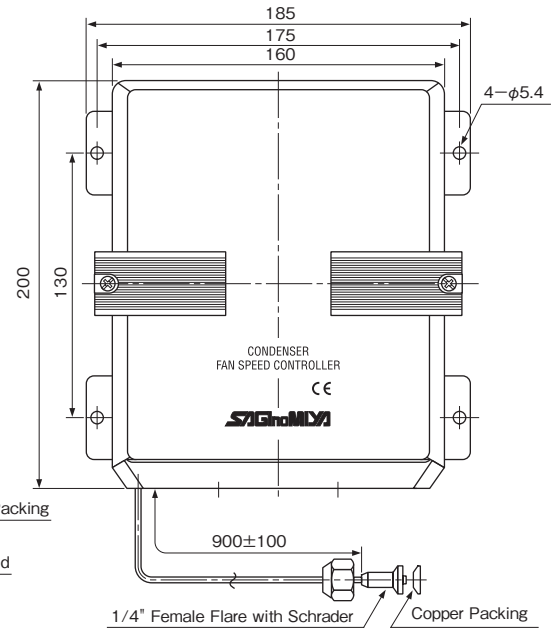

Unit: mm

CONDENSER FAN SPEED CONTROLLERS

Type **XGE**

SAGInoMIYA

GENERAL DESCRIPTION

- The most suitable for controlling the speed of a condenser fan of freezing and refrigeration condensing unit, package air conditioner and other units which are operated throughout a year.
- Keep condensing pressure constant in winter and intermediate seasons for stable operation.

CE mark applicable

SP_{US} listed (available upon request)



SPECIFICATIONS

- Control method: Phase control
- Max. working pressure: 4.7MPa
- Power supply: [Rated Voltage] 200 to 240V. AC ~ single phase [Frequency] 50/60Hz [Rated Amp.] 0.2 to 3A
- Pressure connection: 1/4" Female flare with Schrader (7/16-20 UNF)
- Enclosure: IP65

TYPE NUMBER SELECTION

Catalog No.	*1 F.V.S. Setting (MPa)			*2 E.P.B (MPa)	Refrigerants	Function	Ambient temp. (°C)	Fluid temp. (°C)	Wt. (kg)
	Factory Set	Adjusting Range							
		Min.	Max.						
XGE-4CC-7	1.9	1.0	2.5	0.6	R22, R407C, R404A	Cut off type	-20 to 55	-20 to 70	0.19
XGE-4MC-7						Min. speed type			
XGE-6CC-7	2.8	2.2	3.9	0.7	R410A	Cut off type			
XGE-6MC-7						Min. speed type			

Cut off : Fan motor will be stopped when pressure decrease to the specific value(V%) for R.M.S.

Min. speed: Fan motor will be kept running at the specific value(V%) when pressure band increase more than E.P.B.

*1 F.V.S.: FULL VOLTAGE SET POINT


The pressure at which the control delivers 95% output effective voltage.

*2 E.P.B.: EFFECTIVE PROPORTIONAL BAND


Pressure width where effective voltage corresponds to the min. speed or causes cut off operation.

OPERATION

XGE-4CC-7 and XGE-6CC-7 (Cut off type)





XGE-4MC-7 and XGE-6MC-7 (Min. speed type)




*The operating characteristic may vary according to the voltage, frequency, and fan motor characteristics.

DIMENSIONS

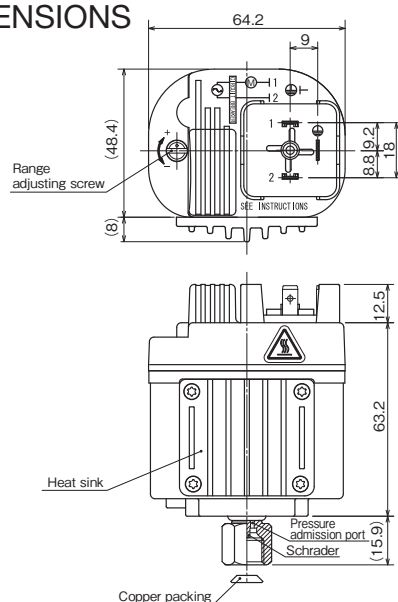

Unit: mm

WIRINGS



Supplied with a gasket. Cable exit in 4 directions possible.

ACCESSORIES (XGE-1 Plug parts set)

- Plug
- Gasket
- Plug fixing screw
- Plastic bag

TEMPERATURE RECORDERS

Type AKM & BKM

SAGINO MIYA

GENERAL DESCRIPTION

- Portable temperature recorder widely applicable for use in refrigeration, air conditioning and medical fields.
- High recording accuracy with quartz driving motor.
Recording paper feeding speed: 3.3mm per hour
- Motor driven by dry cell battery: 1.5V. DC, C-type
Life 1 year
- Type BKM is a temperature sensitive recording paper which is supplied as standard for use 12 month period.
Specify catalog No. when order additional papers.
- Higher and lower alarm pointers can be set within the range.




TYPE NUMBER SELECTION (SPECIFICATIONS)

Unit: °C

Catalog No.	Application Examples	Temp. Range		Indicating Accuracy	Recording Accuracy	Alarm Accuracy	Alarm Power Source	Catalog No. of Recording Paper	Wt. (kg)
		Min.	Max.						
AKM-4014LH1X	For Refrigeration & Freezing	-40	14	±2	±0.5 plus Indicating Accuracy	Temp. Scale ±2	100 to 120V. AC	BKM-4044X	1.6
AKM-4014LH2X							200 to 240V. AC		
AKM-0054LH1X	For Air-conditioning	0	54				100 to 120V. AC	BKM-0054X	
AKM-0054LH2X							200 to 240V. AC		
AKM-1044LH1X		-10	44				100 to 120V. AC	BKM-4044X	
AKM-1044LH2X							200 to 240V. AC		
AKM-0620LH1X	For Medical Use	-6	20	-6 to 2 2 to 8 8 to 20	±2 ±0.8 ±2	100 to 120V. AC	BKM-0620X		
AKM-0620LH2X				200 to 240V. AC					


• Alarm Contact: Each one on upper and lower limit pointer, 100V. AC1A, 200V. AC 0.5A.

WIRINGS

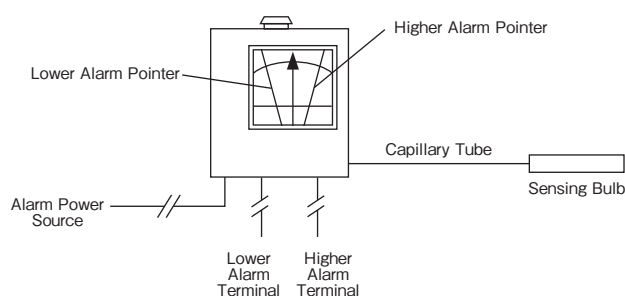

- Standard capillary tube length: $\phi 2.0 \times 2000$ mm
(Plastic covering on capillary tube available.)
- Alarm lamp or buzzer can be connected to the contacts on higher and lower alarm terminals.

DIMENSIONS

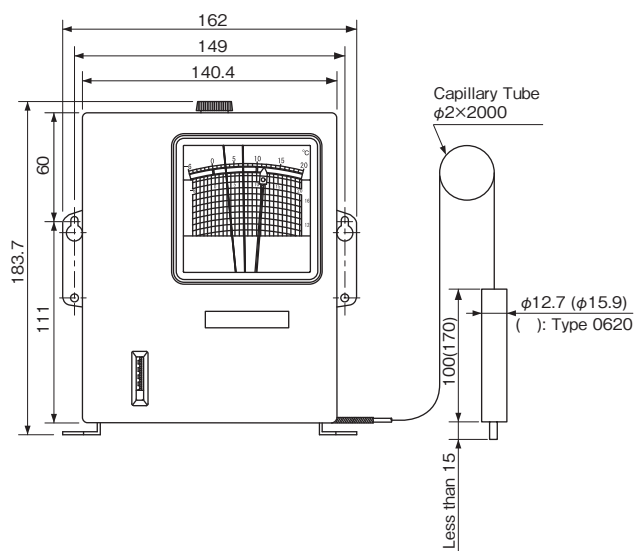

Unit: mm

CO₂ REFRIGERANT APPLICATIONS

High Volume OEM Item

Type CCB, HSK, HPV, UKV-J & JKV

SAGINO MIYA

GENERAL DESCRIPTION

- Used for CO₂ refrigerant applications.
- Available for extreme high pressure.
- Application: Bottle cooler, display case, heat pump water heaters, vending machine



Type CCB



Type HSK



Type HPV



Type UKV-J

● PRESSURE CONTROL for High Pressure [Type CCB]

SPECIFICATIONS

Unit: MPa {kgf/cm²}


Catalog No.	Setting		Max. Pressure	Contact Function	Pressure Connection	Terminal Construction	Application	Wt. (kg)
	on	off						
CCB- * * * *	10 {100}	15 {150}	15 {150}	SPST (High Cut)	1/4" Solder	Open	High Pressure Cut Out	0.07

• Allowable fluid temperature: -30 to 100 °C

ELECTRICAL RATINGS


Category of Ratings			T Rating		M Rating	
Rated Voltage (V)		Power Factor (cos ϕ)	24V. DC	12V. DC	120V. AC	240V. AC
Rated Current (A)						
Non-Inductive Current		1	0.01 to 0.05		1 to 6	
Inductive Current	Full Load	0.75	—	—	—	—
	Inrush Current	—				

CONTACT FUNCTION



DIMENSIONS

Type CCB

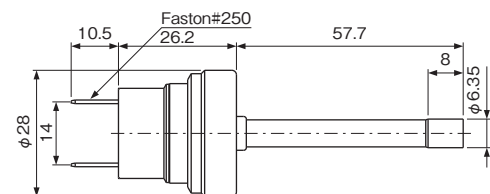

Unit: mm

● PRESSURE SENSOR for High Pressure [Type HSK]

SPECIFICATIONS


Unit: MPa {kgf/cm²}

Catalog No.	Pressure Range	Supply Voltage	Output	Accuracy	Current Consumption	Load Resistance	Airtight Pressure	Pressure Connection	Wt. (kg)
HSK-BC150D- * * *	{0 to 150} 0 to 15	5V. DC±0.25V	0.5 to 4.5V. DC	±2.5% F.S.	Max. 10mA	Min. 10kΩ	15 {150}	φ 6 Solder	0.07

• Allowable fluid temperature: -30 to 120 °C


• Ambient temperature: -30 to 100 °C

WIRING

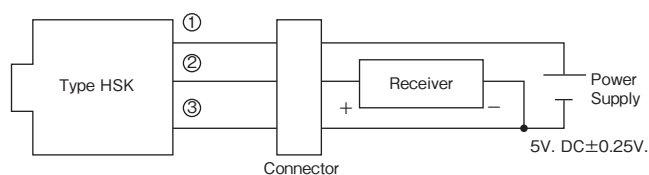

DIMENSIONS

Type HSK

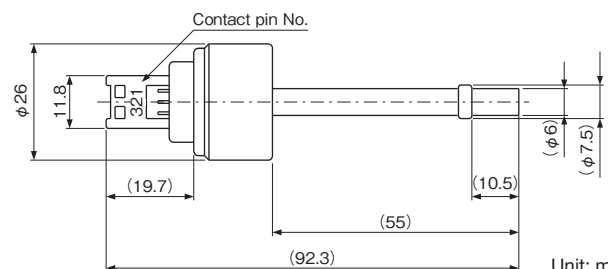

Unit: mm

● SOLENOID VALVE for High Pressure [Type HPV]

TYPE NUMBER SELECTION (SPECIFICATIONS)

Unit: MPa {kgf/cm²}

Catalog No.	Port Size (mm)	Cv Value	Connection		O.P.D.		Max. Working Pressure	Operation	Wt. (kg)
			Copper Tube O.D.	Style	Min.	Max.			
HPV-102DQ1	1.0	0.028	1/4"	Solder	0	10.0 {100}	13.0 {130}	Normal close	0.05
HPV-122D	1.2	0.038			0		13.8 {138}		0.09
HPV-402DQ3	4.0	0.32	1/4"		0		14.0 {140}		0.09
HPV-825DS	7.8	0.54	5/16"		0.1{1}		15.0 {150}		0.13

- O.P.D.: Operating Pressure Differential (by air pressure)
- Ambient temperature: -20 to 50 °C
- Allowable fluid temperature: -30 to 120 °C


ELECTRICAL RATING OF SOLENOID COILS

Valve Type	Rated Voltage		Tolerance (%)	Voltampere		Power Consumption (W)	Insulation Class	Wt. (kg)
				Running	Inrush			
HPV-102DQ1	100V. AC	50/60Hz	±10	11/8	32/27	6/4.5	* Class B Molded	0.13
HPV-122D	200V. AC			16/13	52/38	9/8		0.16
HPV-402DQ3	200V. AC			10/8	32/26	5.5/4.5		0.16
HPV-825DS				14/11	42/33	7/6		0.20


* IEC compliance

DIMENSIONS

Type HPV-102DQ1 {HPV-122D}

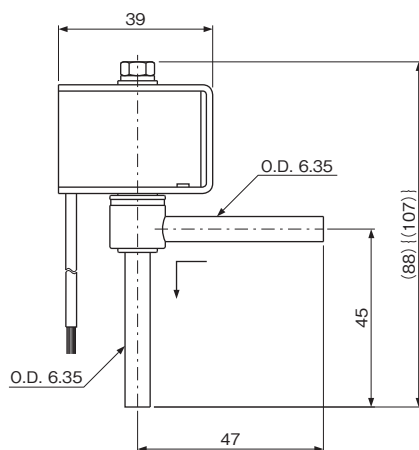


Type HPV-402DQ3

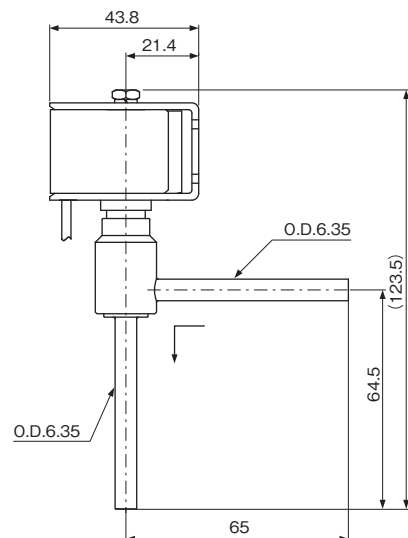

Please contact us if other connection are required.

Type HPV-825DS

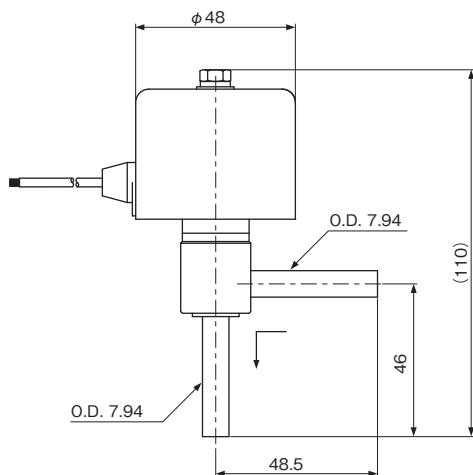

Unit: mm

● ELECTRONIC EXPANSION VALVE for High Pressure [Type UKV-J, JKV]

TYPE NUMBER SELECTION (SPECIFICATIONS)

Unit: MPa {kgf/cm²}

Catalog No.	O PULSE FLOW	Port Size (ϕ mm)	Cv Value	Capacity (U.S.R.T) {kW}		Max. Working Pressure	Operating Pressure Differential	Connection (Solder) (mm)		Wt. (kg)	
				*1 R744 (CO ₂)	*2 R744 (CO ₂)			B side	A side		
UKV-J14D	OPEN TYPE	1.4	0.056	2.9 {10.3}	3.9 {13.6}	15 {150}	0 to 10 {0 to 100}	ϕ 6.35 OD	ϕ 6.35 OD	0.05	
	CLOSE TYPE										
JKV-20D	OPEN TYPE	2.0	0.12	6.2 {21.9}	8.2 {29.0}			ϕ 7.94 OD	ϕ 7.94 OD		0.13
	CLOSE TYPE										
JKV-24D	OPEN TYPE	2.4	0.17	8.7 {30.7}	11.6 {40.7}		0 to 8 {0 to 80}				
	CLOSE TYPE										

* 1: CT = -5 °C, ET = -25 °C, SH = 0 °C, SC = 0 °C

* 2: Gas cooler inlet temp. = 70 °C, Gas cooler outlet temp. = 22 °C, ET = 6 °C, SH = 0 °C

• Allowable fluid temperature: -30 to 70 °C

• Ambient temperature: -30 to 70 °C


SPECIFICATIONS OF COIL

Valve Type	Excitation method	Rated Voltage & Current	Insulation Class	Wt. (kg)
UKV-J14D	1-2 Phase excitation	12V. DC. . . . 260mA/Phase	* Class E Molded	0.12
JKV-20D				0.17
JKV-24D		12V. DC. . . . 380mA/Phase		0.18


* IEC compliance

DIMENSIONS


Type UKV-J

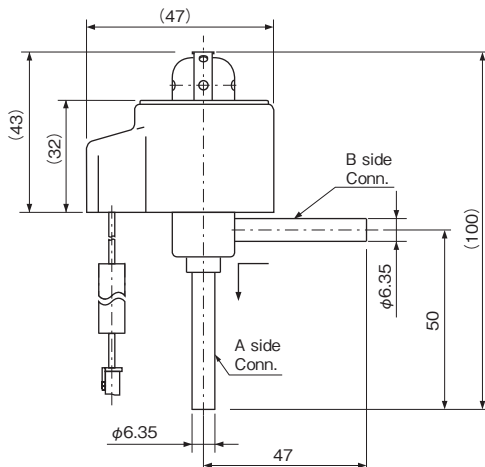

Type JKV-20D

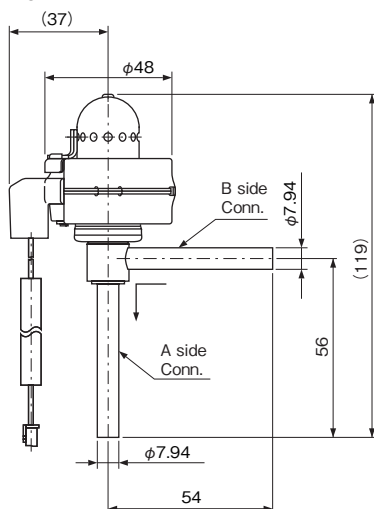

Type JKV-24D

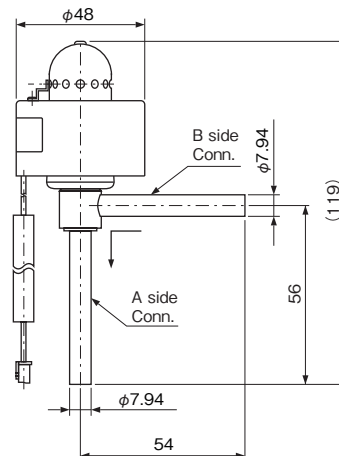

Unit: mm

BELLOWS

High Volume OEM Item

Type HBL & WSL

SAGINO MIYA



Hydraulically-Formed Bellows

Type HBL etc...

Hydraulically corrugated bellows made from a tin wall metal pipe.
Material and specifications are selectable for applications.
Match for mass production and quality are very stable.

Material example: Phosphor bronze, beryllium copper, stainless steel, inconel, etc .



Welding Bellows

Type WSL etc ...


Bellows made from precision-made tin wall metal rings.
Suitable for extremely precision use.
Material is selectable for applications.

Material example: Stainless steel, inconel, etc .



Welding Bellows for vacuum use 〈S bellows〉

Welding bellows for low pressure and long stroke use
Main Characteristics: Using anticorrosion material SUS316L
Long stroke structure
With End Fittings for easy to install
Low price and fast delivery

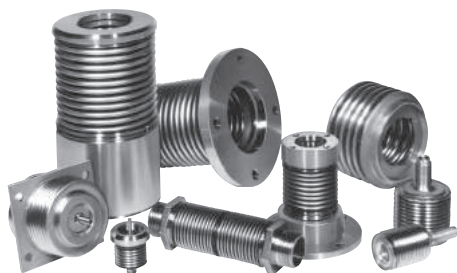

• Applications

Aerospace, marine, chemical, refrigeration, air conditioning, electric, construction, medical, and other various kinds of industrys.
Bellows assembled with fittings are also available.

OTHER CONTROLS & VALVES

Type RKV & BI-METAL(No.03, 05 & 24)

SAGInoMIYA

GENERAL DESCRIPTION


Various controls and valves are available by Saginomiya.
The following are some examples.

- 3-WAY CHANGE-OVER VALVE
Type RKV
 - Control appliance for changing over flow direction in two evaporator type household refrigerator.



Type RKV

- BI-METAL DISC THERMOSTATS
Type 03, 05, 24
 - For various applications, wide available temperature range: — 20 to 260°C
 - Auto reset or manual reset

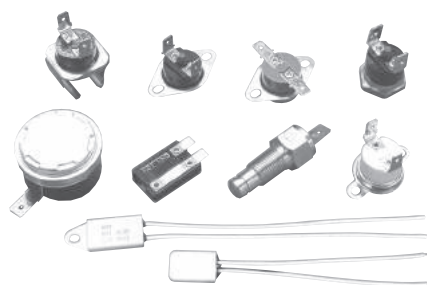

Please contact the company for detail information on the above controls.

CONSENT RELATED TO DISCLAIMERS

We, SAGINOMIYA SEISAKUSHO, INC., (hereinafter referred to as "Saginomiya"), truly appreciate your choosing Saginomiya's product (hereinafter referred to as this "Product").

When this Product is used, this document as provided below shall be applicable except to the extent that there is anything to the contrary in any applicable estimate, agreement, catalogue, specification, etc.

● CONFIRMATION OF OPERATION

All customers using this Product (hereinafter referred to as "Customers") are requested to, after properly installing this Product, test the operation of this Product to confirm that all the systems in connection with this Product fully function.

In order to prevent the occurrence of bodily injury, fire accidents, serious damage, etc., in connection with the Customers' machinery or equipment due to improper installation of this Product, Saginomiya kindly requests the Customers to take the necessary safety measures by preparing safe designs such as a fail-safe design (*1) and a fire spread prevention design, as well as to make the proper adjustments for product reliability necessary for fault-tolerance (*2).

(*1) Fail-safe design: Design to ensure safety in the event of any mechanical failure

(*2) Fault-tolerance: Utilization of redundancy technology

Periodic Inspection of this Product

Be sure to confirm the proper operation of this Product and keep records of such operation at least once a year.

Saginomiya shall be held harmless and be indemnified by the Customers from any damages incurred due to the Customers failing to conduct the above operational procedures, provided, however, that, this shall not apply if the damages which the Customers incurred due to the defect of this Product caused by Saginomiya.

● RESTRICTIONS OF USE

This Product is designed and manufactured for the purpose of using them for cooling and heating and refrigerating appliances and air conditioning equipment or various industrial equipment, but is not designed and manufactured for the purpose of using this Product for any instrument or system related to human life or health purposes.

Therefore, the use of this Product in fields related to items (1) through (3) below is not intended whatsoever.

Saginomiya shall be held harmless and be indemnified from any and all damages incurred by use of this Product under item (3).

- (1) In any field related to nuclear power and radiation;
- (2) In any field related to space or seafloor equipment;
- (3) In any equipment or device requiring a high degree of reliance on such equipment or device with respect to which it is reasonably foreseeable that failure or malfunction of the equipment or device would either directly or indirectly cause serious damage to human life, health or property;

Also, when using this Product under the fields related to items (1) through (10), (except for item (3), in relation to which this Product must never be used), please be sure to notify Saginomiya's contact desk in charge of sales and obtain Saginomiya's prior written approval for such use.

Saginomiya shall be held harmless and be indemnified from any and all damages incurred by use of this Product in relation to these fields if the Customers do not notify Saginomiya's contact desk and obtain Saginomiya's prior written approval.

- (4) Heating, cooling and air conditioning equipment that uses flammable and/or toxic refrigerants, or various industrial equipment that uses flammable and/or toxic fluids;
- (5) Transportation device (railroad, aviation, ship or vessel, vehicle equipment, etc.);
- (6) Disaster-prevention or crime-prevention device;
- (7) Facility or application directly related to medical equipment, burning appliances, electro thermal equipment, amusement rides and devices, facilities/applications associated directly with billing;
- (8) Equipment requiring high reliance on supply systems such as electricity, gas, water, etc., in large-scale communication system, or in transportation or air traffic control system;
- (9) Facilities that are to comply with regulations of governmental / public agencies or specific industries or
- (10) Other machineries or equipment equivalent to those set forth in the above items (4) to (9) which require for high reliability and safety.

It is recommended to replace this Product within 5 to 10 years of delivery if no other duration of use is provided in the applicable specifications or instruction manual because the conditions and environment of use also have an impact on this Product.

● SCOPE OF WARRANTY

SAGINOMIYA WILL PROVIDE THE CUSTOMERS WITH REPLACEMENT OR REPAIRED THIS PRODUCT DELIVERED, FREE OF COST, ONLY WITHIN ONE YEAR OF DELIVERY TO THE CUSTOMER, IF FAILURE OCCURS IN THE CUSTOMERS' EQUIPMENT USING THIS PRODUCT DUE TO A DEFECT OF THIS PRODUCT; PROVIDED, HOWEVER, THAT IN ANY EVENT THE RATIO OF THE AMOUNT THAT SAGINOMIYA BEARS FOR THE DAMAGES INCURRED BY THE FAILURE OF THIS PRODUCT OR CUSTOMERS' EQUIPMENT SHALL NOT EXCEED THE PRICE OF THIS PRODUCT WE DELIVERED. IN ADDITION, SAGINOMIYA SHALL BE HELD HARMLESS AND BE INDEMNIFIED FROM ANY AND ALL DAMAGES INCURRED WHEN THE FAILURE OF THE CUSTOMERS' EQUIPMENT OCCURRED DUE TO ANY CAUSE SET FORTH BELOW.

- (1) WHEN CAUSED BY INAPPROPRIATE HANDLING OR USE OF THIS PRODUCT BY THE CUSTOMERS (SUCH AS NOT COMPLYING WITH THE CONDITIONS, ENVIRONMENTAL SPECIFICATIONS OR CAUTIONS INDICATED IN ANY APPLICABLE CATALOGUE, SPECIFICATIONS, INSTRUCTION MANUAL, ETC.);
- (2) WHEN FAILURE OCCURRED DUE TO ANY REASON OTHER THAN THIS PRODUCT;
- (3) WHEN CAUSED BY MODIFICATION OR REPAIR OF THIS PRODUCT MADE BY ANYONE OTHER THAN SAGINOMIYA OR DESIGNEE OF SAGINOMIYA;
- (4) WHEN CAUSED BY THE USE OF THIS PRODUCT IN VIOLATION OF THE ABOVE "RESTRICTIONS OF USE" OR "CONFIRMATION OF OPERATION";
- (5) WHEN SUCH FAILURE WAS NOT REASONABLY FORESEEABLE AT THE TIME OF SAGINOMIYA'S SHIPMENT; OR
- (6) BY ANY OTHER CAUSE NOT ATTRIBUTABLE TO SAGINOMIYA, SUCH AS AN ACT OF GOD, DISASTER, OR ACT OF ANY THIRD PARTY.

PLEASE NOTE THAT THE CUSTOMERS WILL NOT BE ENTITLED TO ANY OF THE ABOVE WARRANTY IF THE CUSTOMERS PURCHASED THIS PRODUCT FROM INTERNET AUCTION, ETC.

SAGINOMIYA
SEISAKUSHO, INC.
2024.5



WARNING

Failure to read and follow all instruction carefully before installing or operation the product could cause personal injury and/or property damage.

Specifications are subject to change without notice.

Automatic Controls

REFERENCE INFORMATION
APPROVAL STANDARD LIST
PRESSURE CONTROLS
TEMPERATURE & HUMIDITY CONTROLS
PRESSURE & TEMPERATURE CONTROLS INFORMATION
EXPANSION VALVES
SOLENOID VALVES & CONTROL VALVES
OTHER VALVES
OTHER CONTROL EQUIPMENT